


RedLine VDE

AN ELECTRICIAN'S RANGE WITH ADDED VALUE

The VDE Standards - Verband Deutscher Elektrotechniker - are designed to protect all personnel working on and around live equipment up to 1000V. Redline® VDE meets all the criteria for VDE 0682-201 & EN60900 making it one of the safest plier ranges available today. This range has taken advantage of the very latest two component technology to ensure top quality at a very competitive price. Display packed.



AC1000V
EN60900

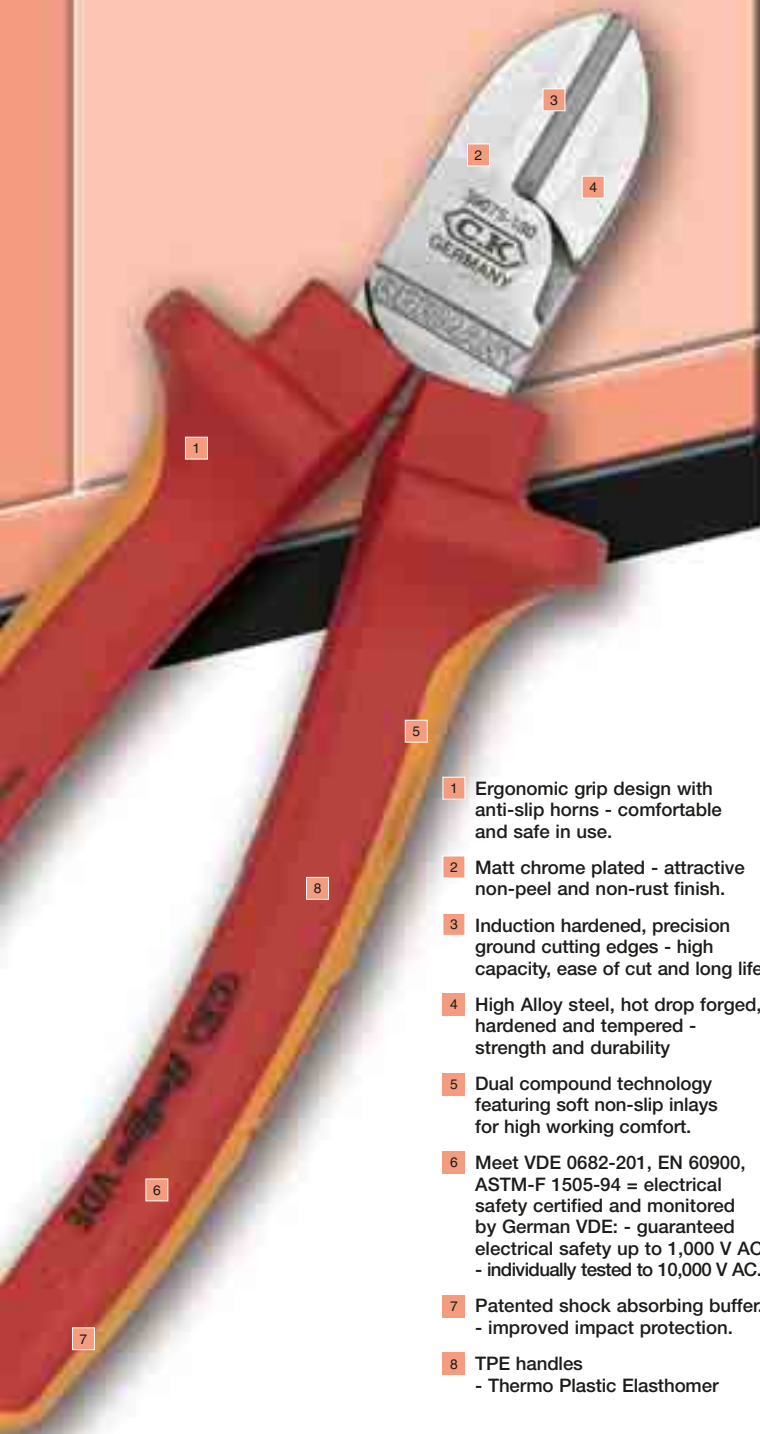


- 1 Ergonomic grip design with anti-slip horns - comfortable and safe in use.
- 2 Matt chrome plated - attractive non-peel and non-rust finish.
- 3 Induction hardened, precision ground cutting edges - high capacity, ease of cut and long life
- 4 High Alloy steel, hot drop forged, hardened and tempered - strength and durability
- 5 Dual compound technology featuring soft non-slip inlays for high working comfort.
- 6 Meet VDE 0682-201, EN 60900, ASTM-F 1505-94 = electrical safety certified and monitored by German VDE: - guaranteed electrical safety up to 1,000 V AC - individually tested to 10,000 V AC.
- 7 Patented shock absorbing buffer. - improved impact protection.
- 8 TPE handles - Thermo Plastic Elastomer

VDE WIRE STRIPPING PLIERS 39074

Coil spring. Brass adjustment screw and lock nut.


VDE 0682/201, EN 60900, DIN 5232 ASTM-F 1505-94

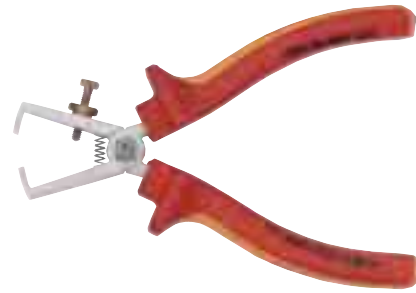

SIZE	STRIPPING CAPACITY: mm Ø	ITEM NO	BOX QTY	WEIGHT
160mm/6"	0.3 - 5.0	T39074	3	220g

VDE COMBINATION PLIERS 39072

VDE 0682/201, EN 60900, ISO 5746, DIN 5244 ASTM-F 1505-94

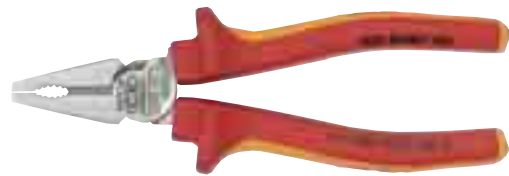

SIZE	CUTTING CAPACITY: mm Ø WIRE			ITEM NO	BOX QTY	WEIGHT
	MED/HARD	SOFT	>4.0			
180mm/7"	1.6	>4.0	T39072 7	3	280g	
200mm/8"	2.0	>4.0	T39072 8	3	340g	

VDE SIDE CUTTERS 39075

Revolutionary head design gives high leverage and easy, clean cutting.

VDE 0682/201, EN 60900, ISO 5749, DIN 5238B ASTM-F 1505-94



SIZE	CUTTING CAPACITY: mm Ø WIRE			ITEM NO	BOX QTY	WEIGHT
	HARD	MED/HARD	SOFT			
160mm/6"	1.6	2.1	>4.0	T39075 6	3	220g
180mm/7"	1.8	2.3	>4.0	T39075 7	3	280g

VDE SNIPE NOSE PLIERS 39070


Bent.


VDE 0682/201, EN 60900, ISO 5745, DIN 5236B ASTM-F 1505-94




SIZE	CUTTING CAPACITY: mm Ø WIRE			ITEM NO	BOX QTY	WEIGHT
	MED/HARD	SOFT	>4.0			
200mm/8"	1.6	>4.0	T39070	3	210g	

WARNING Do not use on live circuits. For use around live circuits not exceeding 1000V AC. Do not touch non insulated areas when in use. Do not use if insulation appears damaged in any way eg: voids, cracks or breaks. Visually inspect before every use. Keep clean and dry for continuing insulation properties and longer life.

VDE SNIPE NOSE PLIERS				39076	
Straight					
VDE 0682/201, EN 60900, ISO 5749, DIN 5238B ASTM-F 1505-94					
					
SIZE	CUTTING CAPACITY: mm Ø WIRE		ITEM NO	BOX QTY	WEIGHT
	MED/HARD	SOFT			
170mm/6 3/4"	1.6	>4.0	T39076 675	3	165g
200mm/8"	1.6	>4.0	T39076 8	3	210g

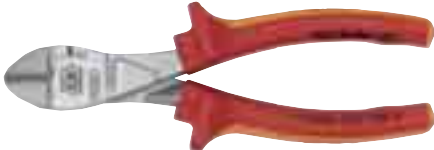VDE HEAVY DUTY SIDE CUTTERS				39073		
Heavy duty design and extra leverage for best cutting performance and high capacity.						
VDE 0682/201, EN 60900, ISO 5749, DIN 5238B ASTM-F 1505-94						
						
SIZE	CUTTING CAPACITY: mm Ø WIRE		ITEM NO	BOX QTY	WEIGHT	
	HARD	MED/HARD	SOFT			
165mm/6 3/4"	2.0	2.5	>4.0	T39073 650	3	260g
200mm/8"	2.5	3.0	>4.0	T39073 8	3	315g

VDE HEAVY DUTY CABLE CUTTERS				39064	
Compact, one handed cable cutting with a large capacity of up to 25mm. 165mm size has a single blade action, the 210mm has a revolutionary two step cutting edge, one with extra leverage the other with anti-slip serration. Cuts cleanly, and effortlessly.					
VDE 0682/201, EN 60900 ASTM-F 1505-94					
					
SIZE	STRIPPING CAPACITY: mm Ø		ITEM NO	BOX QTY	WEIGHT
165mm/6"	14mm		T39064	3	270g
210mm/8 1/4"	25mm		T39064 8	3	315g

DISPLAY RACK				2130	
Suitable for your choice of six patterns.					
					
SIZE	DESCRIPTION	ITEM NO			WEIGHT
410x110mm	Empty rack with sticker - Redline VDE Hooks (x6)	T2130 T2103			700g

VDE TOOL SET 15PC - PZD				17051LS	
Robust tool wallet, made from artificial leather. Plastic handles. Closing catch.					
CONTAINING ONE EACH OF:					
Side Cutter 39075	180mm/7"	Combination Pliers 39072	180mm/7"		
Snipe Nose Pliers 39076	170mm/6 3/4"	Waterpump Pliers 3979	240mm/9 1/2"		
Wire Stripping Pliers 39074	160mm/6"				
Screwdrivers 4735	75 x 2.8, 100 x 4, 125 x 4.5, 150 x 6.5				
Screwdrivers 4733	PZD/PZD 2				
VDE 0682/201, EN 60900 IEC 60900 ASTM-F 1505-94					
					
DIMENSIONS	DESCRIPTION	ITEM NO	BOX QTY	WEIGHT	
360 x 330 x 80mm	Bag with stock	T17051LS	1	2.3kg	

VDE TOOL SET 9PC - PZD				36070S	
Ideal electricians set of the popular SensoPlus pliers and screwdrivers held within a vinyl zipper case.					
CONTAINING ONE EACH OF:					
Wire stripping pliers 39074	160mm/6"	Screwdrivers 49044	75x2.5, 100x3, 125x5.5		
Side cutters 39075	160mm/6"	Screwdrivers 49043	PZD1, PZD2		
Snipe nose pliers 39076	170mm/6 3/4"	Mainstester 4952			
VDE 0682/201, EN 60900 IEC 60900 ASTM-F 1505-94					
					
WALLET SIZE	DESCRIPTION	ITEM NO	BOX QTY	WEIGHT	
245 x 270 x 50mm	Set with stock	T36070S	1	1.306kg	

VDE TOOL SET 9PC - PH				36070	
As 36070S, but replacing PZD with Phillips Screwdriver 49042 1 & 2.					
VDE 0682/201, EN 60900 IEC 60900 ASTM-F 1505-94					
	DESCRIPTION	ITEM NO	BOX QTY	WEIGHT	
	Set with stock	T36070	1	1.306kg	

FOR DISPLAY INFORMATION SEE PAGES 214 -219