

产品说明 Product Description

- ◆ Uses a new type impeller made of plastic or high-quality aluminum alloy, the former to the blade.
叶轮采用新型塑料或优质铝合金制成，前向式叶片。
- ◆ Scroll using galvanized steel sheet production.
蜗壳采用镀锌钢板制作。
- ◆ Scroll plastic, wind-round use of galvanized steel plates.
电机由蜗壳两侧的安装支架固定。
- ◆ Impeller and external rotor motor constitute a whole, as the impeller wheel of the drive motor is air cooled efficiently.
叶轮与外转子电机构成整体，成为叶轮轮毂的驱动电机被气流高效地冷却。
- ◆ Motor protection class: IP44
电机防护等级: IP44

AC centrifugal blowers 交流离心鼓风机
dual inlet Ø 151 mm 双进风式




技术参数 Specifications



Model	Rated Voltage	Frequency	Current Amp	Rated Input Power	Speed	Max Air Flow	Max Static Pressure	Start capacitor	Noise Level
(型号)	(VAC)	(Hz)	(Amp)	(Watt)	(rpm)	(m³/h)	(Inch-H₂O)	(µF/VAC)	(dB-A)
	(额定电压)	(频率)	(额定电流)	(额定功率)	(转速)	(风量)	(风压)	(启动电容)	(噪音)
F15192E-23L-B21	1~230	50/60	0.42/0.45	95/100	900/800	650/660	0.55/0.8	2/450	66

* The max. air flow and the speed are measured in free air; max. air pressure is measured at zero air flow
*以上数据是在最大气流量和速度测量，压力是零空气流测量。

特性曲线图 Characteristic curve

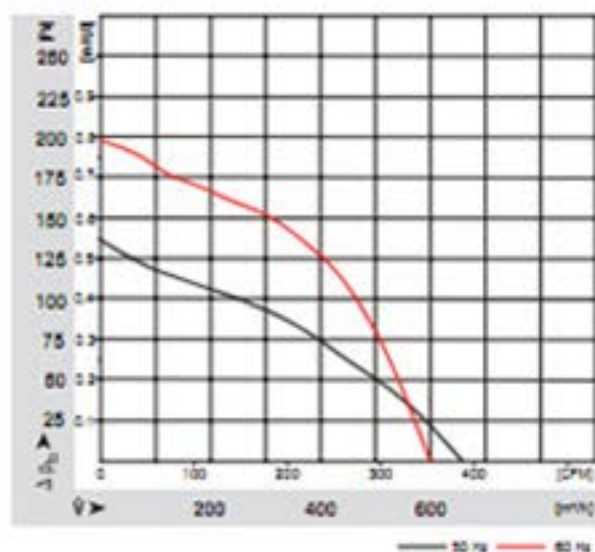

Technical Features

- ◆ External rotor capacitor start type to do three gear speed.
- ◆ Direction of rotation: counter-clockwise seen on plug
- ◆ Insulation class can be made into F-class, B Class
- ◆ Maintenance-free ball bearing
- ◆ Some of the products by CCC, CE certificate
- 技术特点:
 - ◆ 外转子电容启动式可做三挡调速。
 - ◆ 旋转方向: 逆时针看到插头
 - ◆ 绝缘等级可做成: F级, B级。
 - ◆ 免维护双滚珠轴承
 - ◆ 部分产品获得CCC CE认证

外形图 Dimensions (Unit: mm)

