


50(W) x 18.5(H) x 75(L) mm

DPS-12FP A

Input	Voltage range	90~264Vac auto range
	Frequency	47~63Hz
	Efficiency	The average efficiency at 25%, 50%, 75% and 100% load $\geq 80\%$
	Input Current	90~132Vac / 12V/1A load $\leq 0.5A$ 180~264Vac / 12V/1A load $\leq 0.25A$
Output	12V	0A to 1A
Protection	Over-current	Auto recovery
	Over-temperature	Auto recovery
	Short	Auto recovery
	Over-voltage	Auto recovery
Environment	Operating temp.	0 to 50°C Full load, 60°C 80% load, 70 °C 60% load,
	Storage temp.	-20 to 70°C
	Operating humidity	10% - 90%
	Storage humidity	10% - 95%


FEATURES

- Total power 12W
- 90-264Vac auto range input
- High reliability: > 100,000 hours @ full load and normal input (25 °C)
- Protection: Short / Over-current / Over-voltage / Over-temperature
- CCC: 5000 meter
- Bulk Cap: JP Type
- Safety: UL/cUL, TUV, CB by Demko ,CCC
- EMI: CLASS B

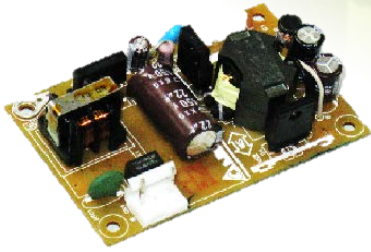

DPS-12FP A

Safety Standards/Directives	Electrical Safety		UL/cUL, TUV, CB by Demko , CCC,CE, KC,BSMI refer to EN 60950-1	
	CE		In conformance with EMC Directive 2004/108/EC and Low Voltage Directive 2006/95/EC	
	EMC		EMI: refer to CISPR 22 ,FCC ,VCCI:CLASS B	
			ESD(IEC61000-4-2)	Air Discharge: $\pm 8KV$ min
				Contact Discharge: $\pm 4KV$ min.
			EFT(IEC61000-4-4)	+/- 1KV
	Surge(IEC61000-4-5)	Common Mode: +/- 2KV		
Different Mode: +/- 1KV				
Isolation	Input to Output	3.0KVac		



DELTA ELECTRONICS, INC.
3, TUNG YUAN ROAD, CHUNGLI
INDUSTRIAL ZONE
TAOYUAN SHIEH, TAIWAN, R.O.C.
TEL: 886-3-4526107
FAX: 886-3-4527314
mail: powersales@delta.com.tw

DELTA PRODUCTS CORPORATION
4405 CUSHING PARKWAY
FREMONT, CA 94538, U.S.A.
TEL: 1-510-668-5100
FAX: 1-510-668-0680

DELTA ELECTRONICS(JAPAN) INC.
DELTA SHIBADAIMON BLDG.
2-1-14 SHIBADAIMON, MINATO-KU,
TOKYO, 105-0012, JAPAN
TEL: 81-3-5733-1111
FAX: 81-3-5733-1211

DELTA ELECTRONICS, EUROPE LTD.
2 YOUNG PLACE KELVIN
INDUSTRIAL ESTATE EAST KILBROIDE,
GLASGOW G75 OTD, U.K.
TEL: 44-1355-588888
FAX: 44-1355-588889

