



**CRYSTEK**  
**MICROWAVE**  
 A DIVISION OF CRYSTEK CORPORATION

**26.5 GHZ LOW LOSS RF  
 COAX CABLE ASSEMBLIES  
 2.92mm(K) AND SMA  
 STAINLESS STEEL  
 CONNECTORS**



**26.5 GHz Low Loss Coaxial Cables**

**Features:**

- Strain Relief:** Heavy duty adhesive strain relief
- Center Conductor:** Silver-plated solid copper
- Inner Braid:** Flat silver-plated copper strip
- Outer Braid:** PC (Round Silver-Plated Copper Braid)
- Dielectric:** Low density microporous PTFE (Polytetrafluoroethylene)
- Jacket:** FEP (Fluorinated Ethylene Propylene)
- Cable Outer Diameter:** 0.205" (5.21mm)
- Connectors:** SST, corrosion-resistant 303 stainless steel per ASTM-A582 (Passivated finish per SAE-AMS-2700)
- Center Pin:** GPBC (Gold-Plated Beryllium Copper)
- Jacket Color:** Grey
- Operating Temperature:** -40°C to +85°C

**Minimum Bend Radius:** 1.1"


*Custom Lengths Available*

- Connector Corrosion (salt spray):** MIL-STD-202, method 101, test cond. B 5% salt solution.
- Connector Durability:** 500 connections Minimum

**Electrical Specifications:**

- Impedance:** 50 Ohms
- Frequency:** Up to 26.5 GHz
- Insertion Loss:** <0.5 dB/ft at 26.5 GHz
- VSWR:** <1.35 to 26.5 GHz
- Max Operating Voltage:** 500V RMS
- Nominal Capacitance:** 27.0 pF/ft
- Velocity of Propagation:** 76%
- Shield Effectiveness:** Greater than 90 dB
- Attenuation (dB/ft):** 0.05 Max at 500 MHz  
 0.11 Max at 2 GHz  
 0.30 Max at 12 GHz  
 0.38 Max at 18 GHz  
 0.50 Max at 26.5 GHz

\*connector loss not included

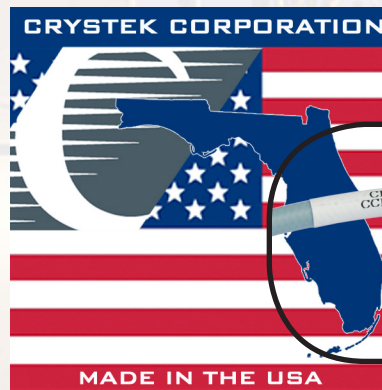

Electrical Test Data Supplied With Each Cable Assembly

**2.92mm(K) / 2.92mm(K) [Straight/Straight]**

Part Number	Description	Length
CCK26.5-MM-190-30	26.5 GHz Low Loss Coax Cable, 2.92mm(K) Male/Male, Straight/Straight	30"
CCK26.5-MM-190-36	26.5 GHz Low Loss Coax Cable, 2.92mm(K) Male/Male, Straight/Straight	36"
CCK26.5-MM-190-39.4	26.5 GHz Low Loss Coax Cable, 2.92mm(K) Male/Male, Straight/Straight	39.4"
CCK26.5-MM-190-48	26.5 GHz Low Loss Coax Cable, 2.92mm(K) Male/Male, Straight/Straight	48"

**SMA / SMA [Straight/Straight]**

Part Number	Description	Length
CCSMA26.5-MM-190-30	26.5 GHz Low Loss Coax Cable, SMA Male/Male, Straight/Straight	30"
CCSMA26.5-MM-190-36	26.5 GHz Low Loss Coax Cable, SMA Male/Male, Straight/Straight	36"
CCSMA26.5-MM-190-39.4	26.5 GHz Low Loss Coax Cable, SMA Male/Male, Straight/Straight	39.4"
CCSMA26.5-MM-190-48	26.5 GHz Low Loss Coax Cable, SMA Male/Male, Straight/Straight	48"





12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
 PHONE: 239-561-3311 • 800-237-3061 Rev.: C  
 FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 04-07-14



**CRYSTEK**  
**MICROWAVE**  
A DIVISION OF CRYSTEK CORPORATION

**26.5 GHZ LOW LOSS RF  
COAX CABLE ASSEMBLIES  
2.92mm(K) AND SMA  
STAINLESS STEEL  
CONNECTORS**

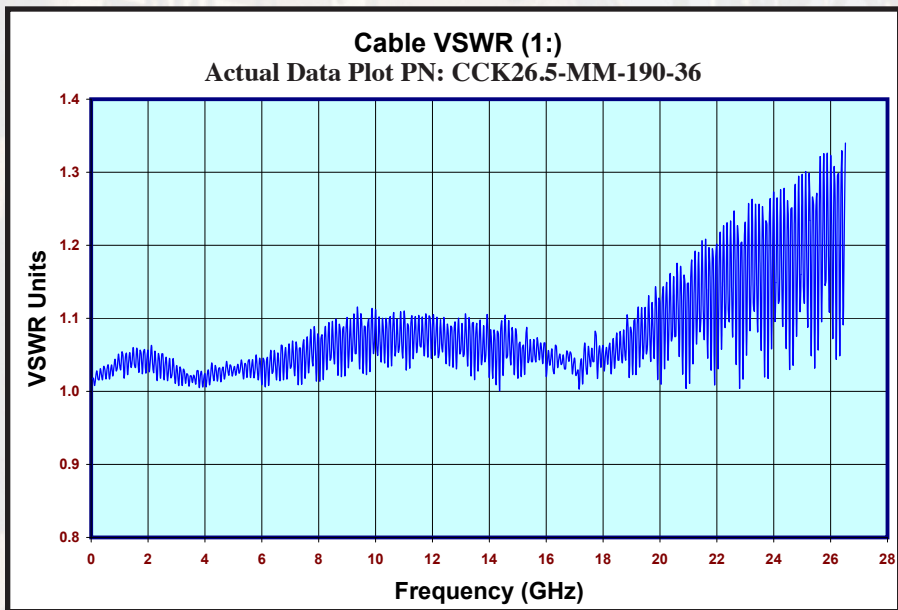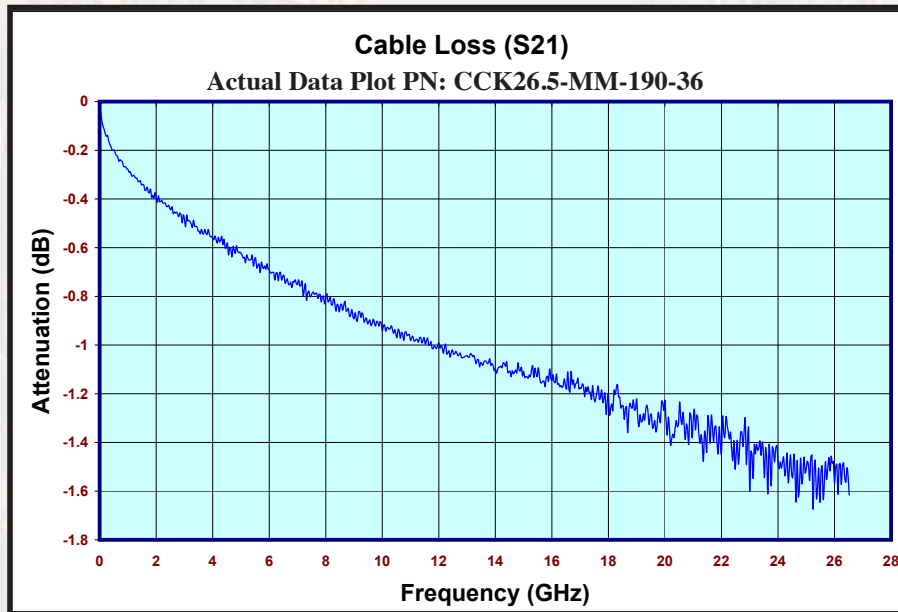



**CRYSTEK**  
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
PHONE: 239-561-3311 • 800-237-3061 Rev.: C  
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 04-07-14



**CRYSTEK**  
**MICROWAVE**  
A DIVISION OF CRYSTEK CORPORATION

**26.5 GHZ LOW LOSS RF  
COAX CABLE ASSEMBLIES  
2.92mm(K) AND SMA  
STAINLESS STEEL  
CONNECTORS**

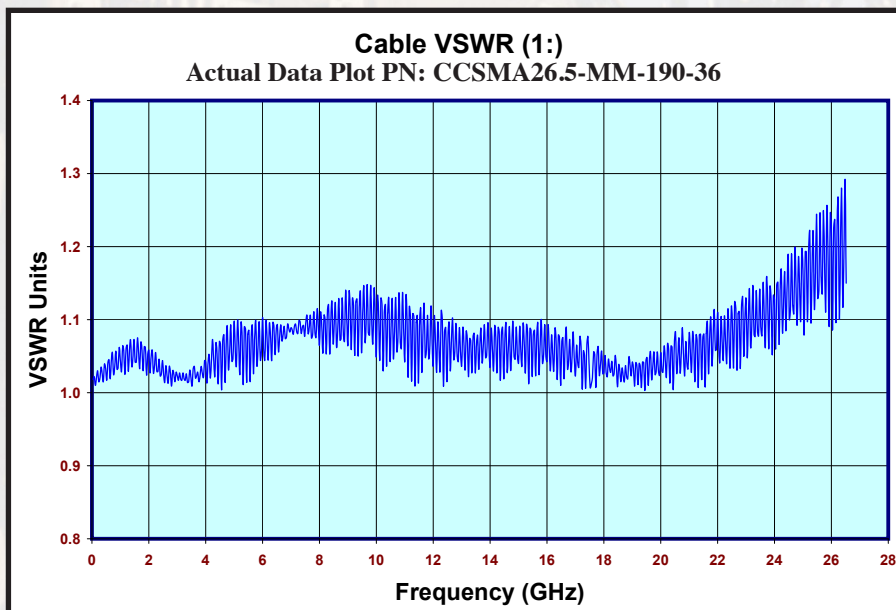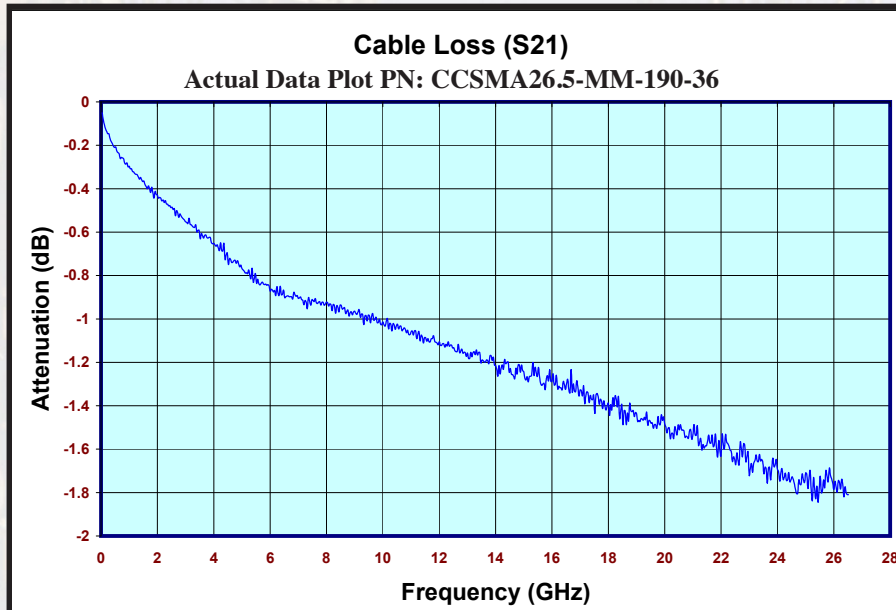

**CRYSTEK**  
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
PHONE: 239-561-3311 • 800-237-3061 Rev.: C  
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 04-07-14