



## Features

- For use with Model 3682 and 3683 digital pushbutton precision potentiometers

# H-385 - Panel Seal Assembly

### Physical Characteristics<sup>1</sup>

Material (Boot).....	Clear silicone rubber
Material (Frame).....	Rigid black plastic
Expected Life.....	100,000 actuations minimum
Weight	
H-385-2.....	Approximately 8.50 gm
H-385-3.....	Approximately 9.92 gm


### Application Data

- Protects front of the pot from unwanted entry of rain, dust, grease or oils
- Transparent for easy viewing of numerals
- Tear resistant for long life
- Matte finish black plastic frame to complement most front panels


Bourns® Model H-385 Panel Seal Assembly minimizes accidental entry of liquids or foreign matter through the front of the Model 3682 and 3683 Potentiometers.

### H-385 MOUNTING INSTRUCTIONS

1. Cut out and drill panel<sup>1</sup> per chart.
2. Install snap-in potentiometer<sup>2</sup>.
3. Locate silicone boot<sup>3</sup> and frame<sup>4</sup> over potentiometer and holes.
4. Attach panel seal assembly to panel with two #6 screws (not supplied).

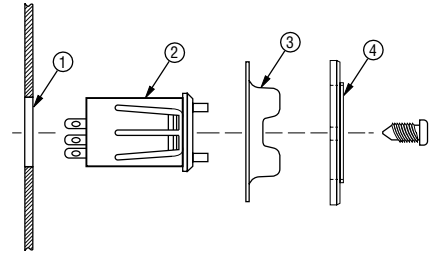

### PANEL CUT-OUT/HOLE DIMENSIONS

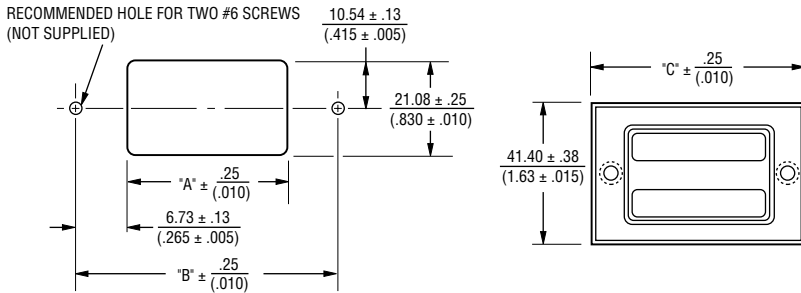

For Use With	Part Number	Frame Dimensions "C"	Panel Cutout/ Hole Dimensions	
			"A"	"B"
3682	H-385-2	50.60 (1.992)	25.91 (1.020)	39.37 (1.550)
3683	H-385-3	60.76 (2.392)	36.07 (1.420)	49.53 (1.950)

<sup>1</sup>At room ambient: +25 °C nominal and 50 % relative humidity nominal, except as noted.

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$