

WM15



Power analyzer for three-phase systems



Description

WM15 is a power analyzer for single-, two- and three-phase systems.

Depending on the model, WM15 is equipped with a static output (pulse or alarm) or with a static output and a Modbus RTU communication port.

The self-powered version can be installed on systems up to 415 V L-L (400 V L-L for MID models), while the version with auxiliary power supply can be installed on systems up to 600 V L-L.

In combination with VMUBM2US1B1C, collected data can be transmitted via M-Bus.

Applications

WM15 can be installed in any switchboard to control energy consumption, main electrical variables and harmonic distortion.

In panel boards, where typically three analogical ammeters are installed to give a visual feedback of the system status, WM15 provides the same information on the matrix display by means of the bar graphs.

When used to monitor a single machine, WM15 relates the energy consumption with the operating hours to schedule maintenance and detect faults. Moreover, the reset of partial counters allows to monitor each machine cycle.

Thanks to the MID certification, it can also be used for fiscal metrology.

Main functions

- Measure main electrical variables and voltage and current harmonic distortions

Benefits

- **Enhanced readability.** The backlit graphical display allows the size of the digits to be adapted to the displayed variable. The instantaneous values of the current are also shown by a bar graph to have the plant situation at a glance.
- **Easy navigation.** The setup and navigation of the pages are very intuitive thanks to the user interface with 4 mechanical push buttons. In addition, the slideshow function automatically displays the desired measurements in sequence without having to use the keypad.
- **Quick setup.** Wizard and wiring correction on first startup, UCS mobile app for setup via OptoProg and optical port are some of the advantages allowing a quick, guided and errorless installations and commissioning. UCS software is available for free download.
- **Accurate measurement.** It is compliant with the international accuracy standard IEC/EN62053-21, and the IEC/EN61557-12 performance requirements (active power and active energy).
- **Fiscal metrology.** WM15 configuration access can be locked and terminals can be sealed in case of a MID certified model for fiscal metering.
- **Installation flexibility.** WM15 is suitable for single-phase, two-phase, three-phase and wild-leg systems with different voltage levels and grid frequencies used worldwide.


- Measure active and reactive energy
- Measure apparent energy
- Measure load operating hours
- Transmit data to other systems via Modbus RTU
- Manage a digital output for pulses or alarm transmission
- Visualize measured variables on display and current consumption via bar graph





Main features

- System and phase variables (V L-L, V L-N, A, W/var, VA, PF, Hz)
- Current and power (kW/kVA) demand calculation
- Simplified 4 push buttons user interface
- Optical port for easy configuration and diagnostic via OptoProg
- Digital output for pulse transmission or alarm
- Optional RS485 Modbus RTU (100 ms data refresh)
- Continuous sampling of each voltage and current
- Backlit matrix LCD display
- MID certified version
- cULus approved (UL 61010)
- Compliant with IEC/EN61557-12 performance requirements (active power and active energy)

UCS software and UCS Mobile application

- Free download: UCS desktop from Carlo Gavazzi website, UCS Mobile from Google Play Store
- Configuration via OptoProg (via Bluetooth) or RS485 from PC (via UCS desktop) or Android mobile device (via UCS Mobile)
- Setups can be saved offline for serial programming with a single command
- Real time data view for testing and diagnostics
- Notification of possible wiring errors and display of the corrective steps, reassignment of the correct association of the phases or the direction of the currents via software control.

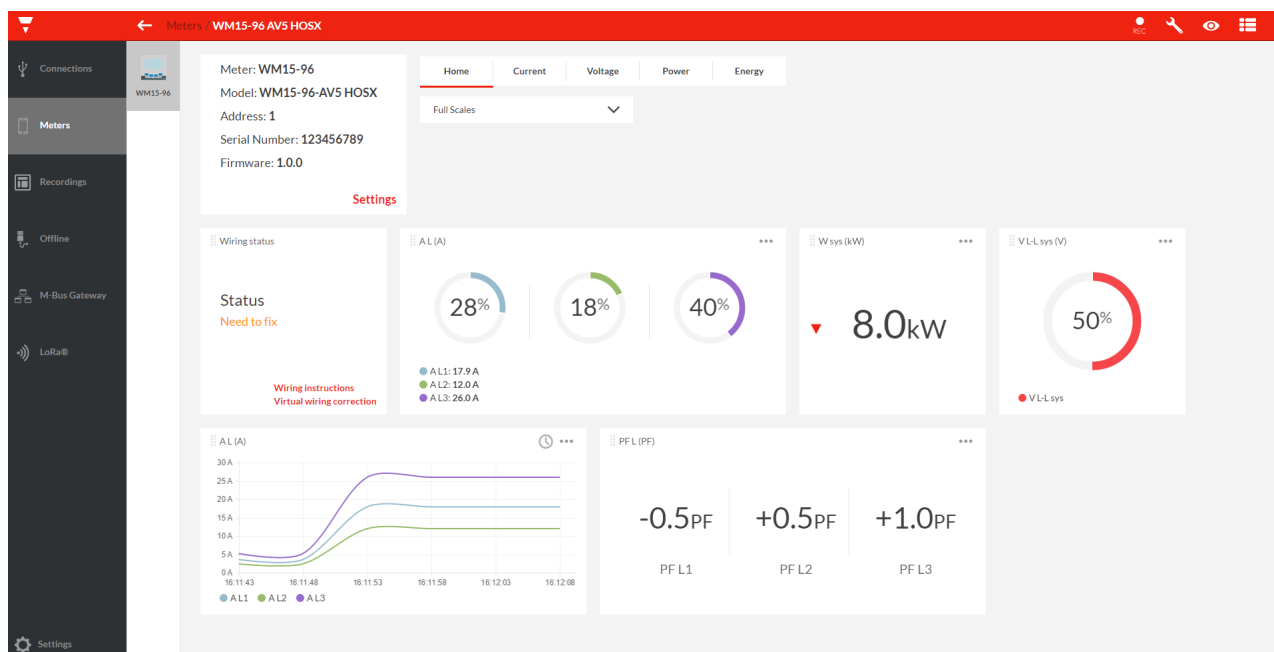

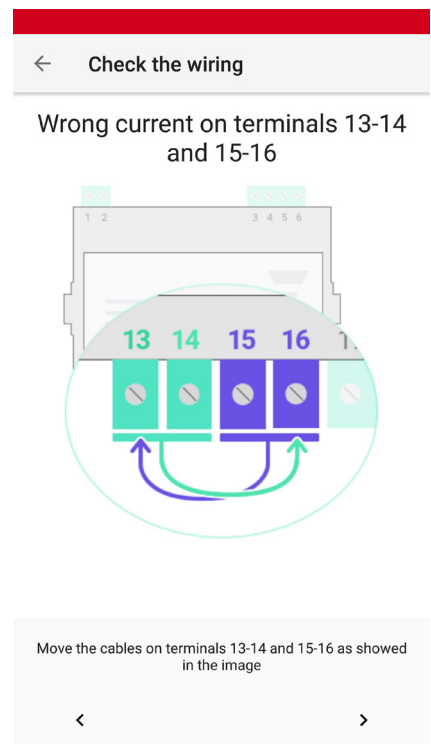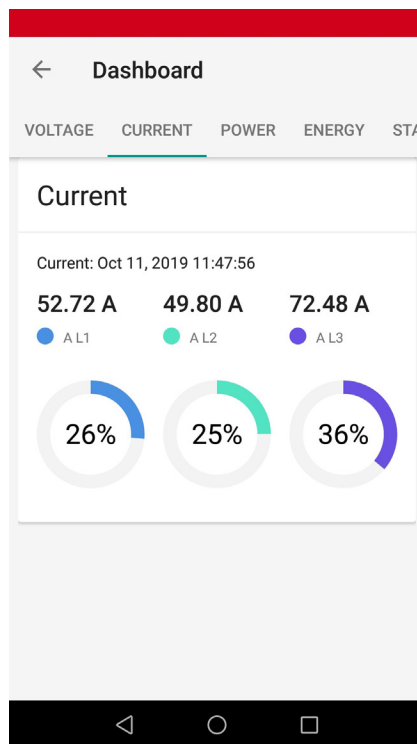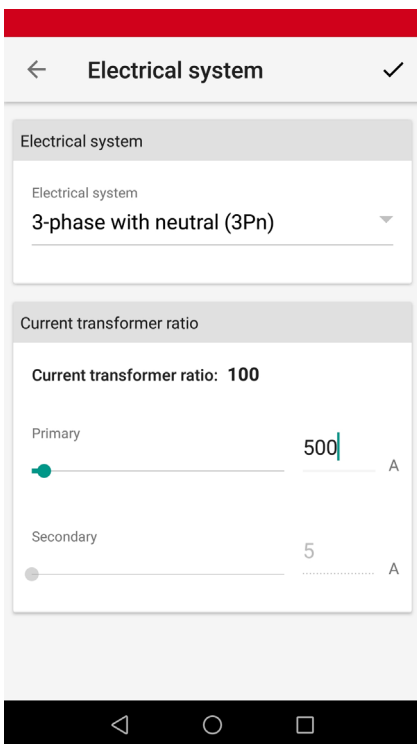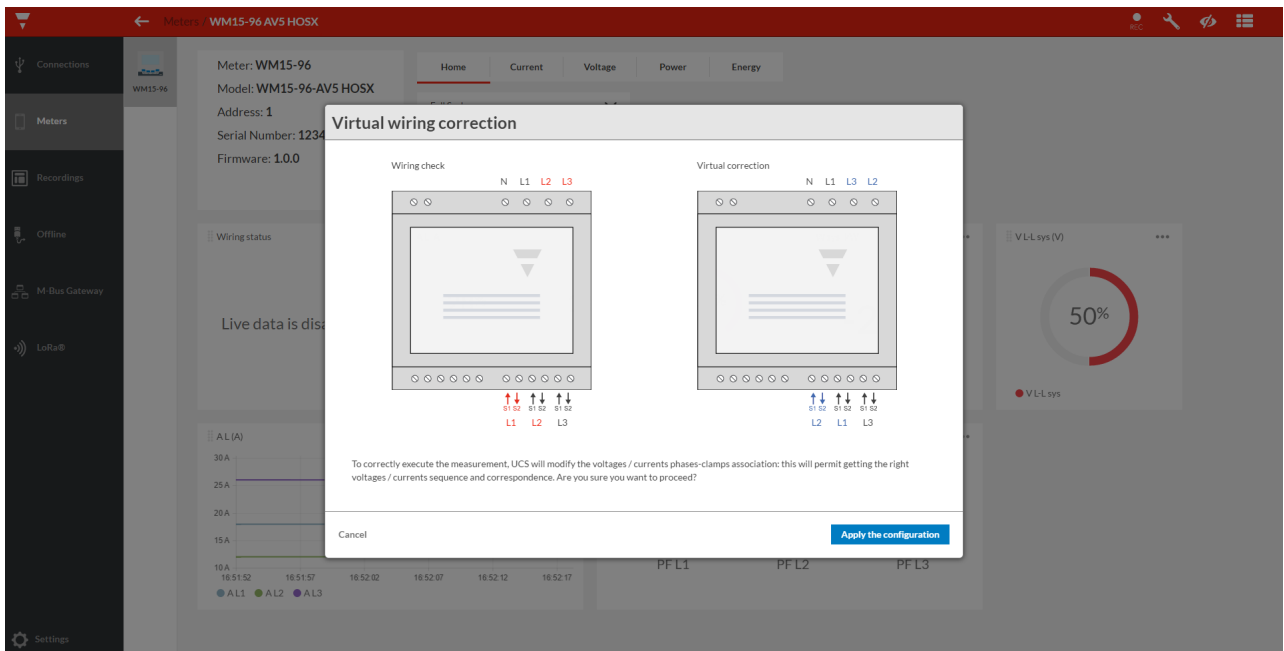

Structure

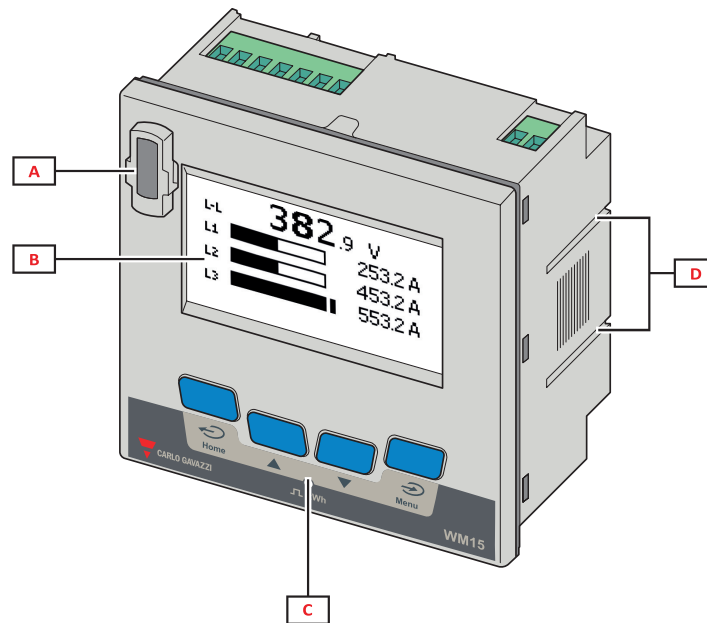


Fig. 1 Front

| Area | Description |
|------|---|
| A | Optical port for easy programming and diagnostic via Optoprog |
| B | Matrix LCD display |
| C | Mechanical push buttons |
| D | Grooves for lateral brackets |

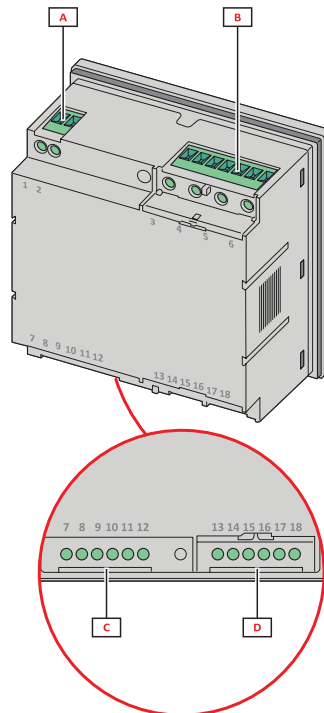



Fig. 2 Back

| Area | Description |
|------|---|
| A | Power supply: auxiliary version (non-MID models only) |
| B | 3-phase voltage input |
| C | RS485 + digital output |
| D | 3-phase current inputs |

Features

General

| | |
|-----------------------------|--|
| Material | Housing: PC/ABS (UL94 V1) Transparent cover: PC (UL94 V2) |
| Protection degree | Front: IP51 Terminals: IP20 |
| Terminals | Screw fixed terminal block, min:0.05; max: 2.5 mm ² |
| Overvoltage category | Cat. III |
| Pollution degree | 2 |
| Mounting | Panel 96 x 96 |
| Weight | 280 g |

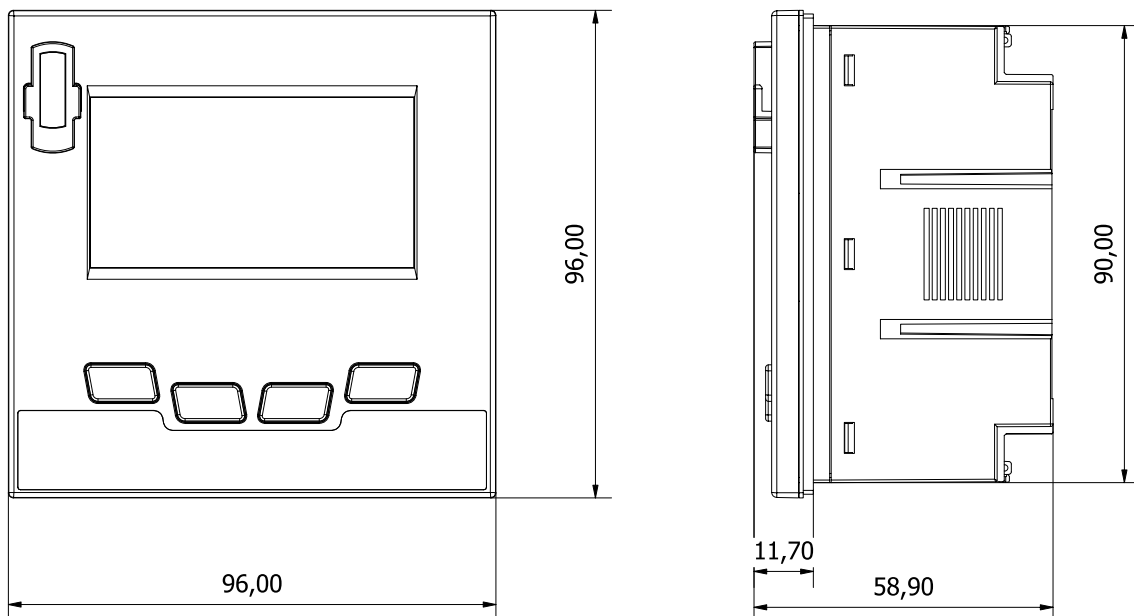

Environmental specifications

| | |
|--|--|
| Operating temperature | From -25 to +55 °C/from -13 to +131 °F |
| Storage temperature | From -25 to +70 °C/from -13 to 158 °F |
| Electromechanical environmental condition | E2 |
| Mechanical environmental condition | M2 |



NOTE: R.H. < 90 % non-condensing @ 40 °C / 104 °F.

Input and output insulation

| Type | Power supply (H) [kV] | Measurement inputs [kV] | Digital output [kV] | RS485 serial port [kV] |
|--------------------|-----------------------|-------------------------|--------------------------|--------------------------|
| Power supply (H) | - | Base (AV5 3H) | Double/Reinforced | Double/Reinforced |
| Measurement inputs | Base (AV5 3H) | - | Double/Reinforced | Double/Reinforced |
| Digital output | Double/Reinforced | Double/Reinforced | - | Functional (100 V ac/dc) |
| RS485 serial port | Double/Reinforced | Double/Reinforced | Functional (100 V ac/dc) | - |

According to: EN 61010-1, EN 50470-1 (MID). Overvoltage category III. Pollution degree 2.

Compatibility and conformity

| | |
|------------|--|
| Directives | 2014/32/EU (MID) 2014/35/EU (LVT - Low Voltage) 2014/30/EU (EMC - Electro Magnetic Compatibility) 2011/65/EU (Electric-electronic equipment hazardous substances) |
| Standards | Electromagnetic compatibility (EMC) - emissions and immunity: EN 62052-11; EN 50470-1 (MID) Electrical safety: EN 61010-1, EN 50470-1 (MID) Metrology: EN62053-21, EN62053-23, IEC61557-12, EN 50470-3 (MID), IEC/EN61557-12 (active power and active energy, MID models only) Pulse output: IEC 62053-31 |
| Approvals |   |

Electrical specifications

| Electrical system | |
|-------------------------------|--|
| Managed electrical system | Single-phase (2-wire) Two-phase (3-wire) Three-phase with neutral (4-wire) Three-phase without neutral (3-wire) Wild leg system (three-phase, four-wire delta) |
| MID managed electrical system | Three-phase with neutral (4-wire) Three-phase without neutral (3-wire) (ARON) |
| Voltage inputs - MID | |
| Voltage connection | Direct |
| Rated voltage L-N | 230 V |
| Rated voltage L-L | 400 V |
| Voltage tolerance | From 0.8 to 1.15 Un |
| Overload | Continuous: 1.5 Un max |
| Input impedance | Refer to "Power supply" |
| Frequency | 50 Hz |

| Voltage inputs Non MID models | | |
|---|---------------------------|------------------|
| | AV5 3X | AV5 3H |
| Voltage connection | Direct | |
| Rated voltage L-N (from U_n min to U_n max) | 120 to 240 V | 120 to 347 V |
| Rated voltage L-L (from U_n min to U_n max) | 208 to 415 V | 208 to 600 V |
| Voltage tolerance | From 0.8 to 1.15 U_n | |
| Overload | Continuous: 1.5 U_n max | |
| Input impedance | Refer to "Power supply" | >1600 k Ω |
| Frequency | From 45 to 65 Hz | |

Note: for MID versions the voltage range is limited to 3x230 (400) V, frequency to 50Hz.

NOTE: WM15 can also be installed in a wild leg system (three phases, four delta wires), where one of the phase-neutral voltages is higher than the other two.

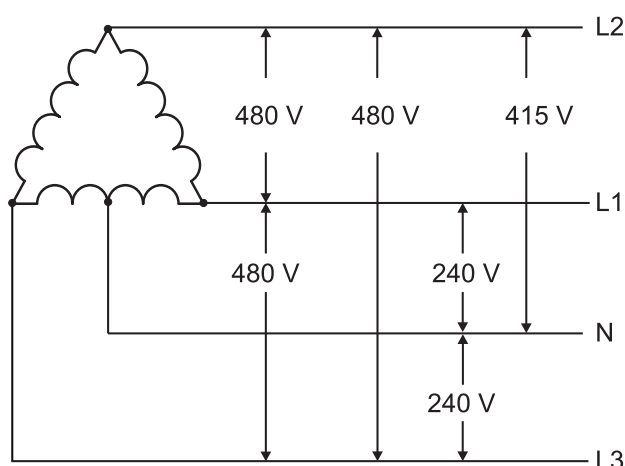


Fig. 3 AV5 3H

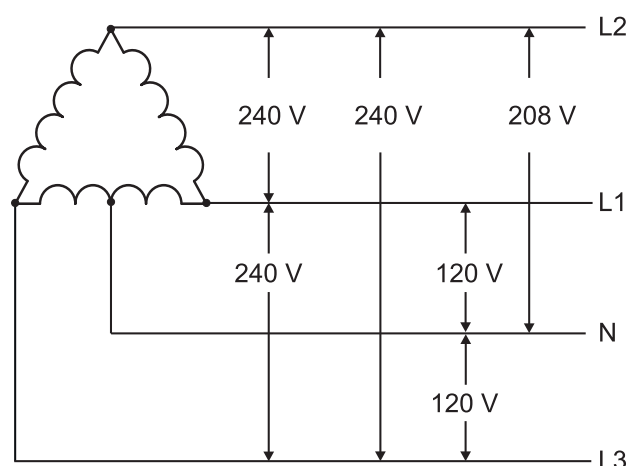


Fig. 4 AV5 3X, AV5 3H

| Current inputs | |
|-------------------------------|---|
| Current connection | Via CT |
| CT transformation ratio | 2000 max |
| Rated current (I_n) | 5 A |
| Minimum current (I_{min}) | 0.05 A |
| Maximum current (I_{max}) | 6 A |
| Start-up current (I_{st}) | 10 mA |
| Overload | For 500 ms: 20 I_{max} (120 A) |
| Input impedance | < 0.2 VA |
| Crest factor | 3 |
| Measurement type | by means of internal shunts non mutually insulated (AV5 3X) by means of internal CT (AV5 3H) |

Power supply

| | AV5 3X | AV5 3H |
|-----------|-------------------|--|
| Type | Self power supply | Auxiliary power supply from 120 to 240 V ac/dc |
| Frequency | 50/60 Hz | |

Measurements

| | |
|--------|--|
| Method | TRMS measurements of distorted waveforms |
|--------|--|

Available measurements

| Active energy | Unit | System | Phase |
|----------------------|------|--------|-------|
| Imported (+) Total | kWh+ | ● | ● |
| Imported (+) partial | kWh+ | ● | - |
| Exported (-) Total | kWh- | ● | - |
| Exported (-) partial | kWh- | ● | - |

| Reactive energy | Unit | System | Phase |
|----------------------|--------|--------|-------|
| Imported (+) Total | kvarh+ | ● | - |
| Imported (+) partial | kvarh+ | ● | - |
| Exported (-) Total | kvarh- | ● | - |
| Exported (-) partial | kvarh- | ● | - |

| Apparent energy | Unit | System | Phase |
|-----------------|------|--------|-------|
| Total | kVAh | ● | - |
| Partial | kVAh | ● | - |

| Run hour meter | Unit | System | Phase |
|----------------|---------|--------|-------|
| Total (kWh+) | hh:mm | ● | - |
| Partial (kWh+) | hh:mm | ● | - |
| Total (kWh-) | hh:mm - | ● | - |
| Partial (kWh-) | hh:mm - | ● | - |

| Electrical variable | Unit | System | Phase |
|---------------------|-----------|--------|-------|
| Voltage L-N | V | ● | ● |
| Voltage L-L | V | ● | ● |
| Current | A | ● | ● |
| DMD | A | - | ● |
| DMD MAX | A | - | ● |
| Active power | W | ● | ● |
| DMD | W | ● | - |
| DMD MAX | W | ● | - |
| Apparent power | VA | ● | ● |
| DMD | VA | ● | - |
| DMD MAX | VA | ● | - |
| Reactive power | Var | ● | ● |
| Power factor | PF | ● | ● |
| Frequency | Hz | ● | - |
| THD Current* | THD A % | - | ● |
| THD Voltage L-N* | THD L-N % | - | ● |
| THD Voltage L-L* | THD L-L % | - | ● |

* Up to 15th harmonic

NOTE: the available variables depend on the type of system set.

Total imported active energy (kWh TOT) is the only MID certified meter. Apparent energy, reactive energy and exported active energy are not MID certified. Partial meters are not MID certified.

All the variables calculated by the meter are referred to the primary current of the current transformer.

Energy metering

For every measuring interval time, the energies of the single phases are summed; according to the sign of the result, the positive (kWh+) or negative totalizer (kWh-) is increased.

Example:

P L1= +2 kW, P L2= +2 kW, P L3= -3 kW

Integration time = 1 hour

+kWh=(+2+2-3)x1h=(+1)x1h=1 kWh

-kWh=0 kWh

Measurement accuracy

| Current | |
|---|---|
| From 0.1 In to I _{max} | ± 0.5% rdg |
| From 0.01 In to 0.05 In | ± 1% rdg |
| Phase-phase voltage | |
| From Un min -20% to Un max +15% | ± 0.5% rdg |
| Phase-neutral voltage | |
| From Un min -20% to Un max +15% | ± 0.5% rdg |
| Active and apparent power | |
| From 0.05 In to I _{max} (PF=0.5L - 1 - 0.8C) | ± 1% rdg |
| From 0.01 In to 0.05 In (PF=1) | ± 1.5% rdg |
| Reactive power | |
| From 0.1 In to I _{max} (sinφ=0.5L - 0.5C) | ± 2% rdg |
| From 0.05 In to I _{max} (sinφ=1) | |
| From 0.05 In to 0.1 In (sinφ=0.5L - 0.5C) | ± 2.5% rdg |
| From 0.02 In to 0.05 In (PF=1) | |
| Active energy | Class 1 EN62053-21, Class B EN50470-3 (MID) |
| Reactive energy | Class 2 (EN62053-23) |
| Frequency | |
| From 45 to 65 Hz | ± 0.1% rdg |
| Measurement accuracy according to IEC/EN61557-12 (MID models) | |
| Active power | Performance class 1 |
| Active energy | Performance class 2 |

Measurement resolution

| Variable | Display resolution | Resolution by serial communication |
|--------------|---------------------|------------------------------------|
| Energy | 0.01 kWh/kvarh/kVAh | 0.001 kWh/kvarh/kVAh |
| Power | 0.1 kW/kvar/kVA | 0.1 W/var/VA |
| Current* | 0.1 A | 0.001 A |
| Voltage | | 0.1 V |
| Frequency | 0.1 Hz | 0.001 Hz |
| THD | | 0.01 % |
| Power factor | | 0.01 |

*Note: value referred to CT ratio =1

Display

| | |
|------------------|--|
| Type | Matrix 128x64 dots |
| Refresh time | 500 ms |
| Description | Backlit LCD |
| Variable readout | Instantaneous: 5+1 dgt Power factor: 1+2 dgt Energy: 8+2 dgt |

LED

| | | |
|-------|--|--------------------|
| Front | Red. Pulse weight: proportional to energy consumption and depending on the CT ratio (16 Hz maximum frequency): | |
| | Weight (kWh per pulse) | CT ratio |
| | 0.001 | ≤ 7 |
| | 0.01 | From 7.1 to 70 |
| | 0.1 | From 70.1 to 700 |
| | 1 | From 700.1 to 2000 |

Digital outputs

Digital output

| | |
|----------------------------------|--|
| Connection type | Screw terminals |
| Maximum number of outputs | 1 |
| Type | Opto-mosfet |
| Function | Pulse output or alarm output |
| Features | V_{ON} 2.5 V ac/dc, max 100 mA V_{OFF} 42 V ac/dc |
| Configuration parameters | Output function (pulse/alarm) Pulse weight (from 0.001 to 10 kWh per pulse) Pulse duration (30 or 100 ms) Output normal status (NO or NC) |
| Configuration mode | Via keypad or UCS software |

Communication ports

RS485 port

| | |
|---------------------------------|--|
| Protocol | Modbus RTU |
| Devices on the same bus | Max 160 (1/5 unit load) |
| Communication type | Multidrop, bidirectional |
| Connection type | 2 wires |
| Configuration parameters | Modbus address (from 1 to 247) Baud rate (9.6 / 19.2 / 38.4 / 115.2 kbps) Parity (None/ Odd/ Even) |
| Refresh time | ≤ 100 ms |
| Configuration mode | Via keypad or UCS software |

Optical port

| | |
|-------------------------------|---|
| Compatible accessories | OptoProg |
| Function | Configuration and diagnostic via UCS Mobile app or UCS software |

Connection Diagrams

Non MID models

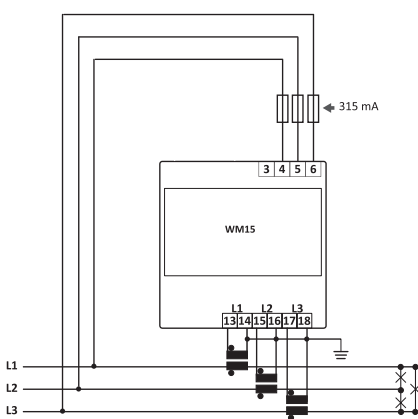


Fig. 5 Three-phase without neutral (3-wire)

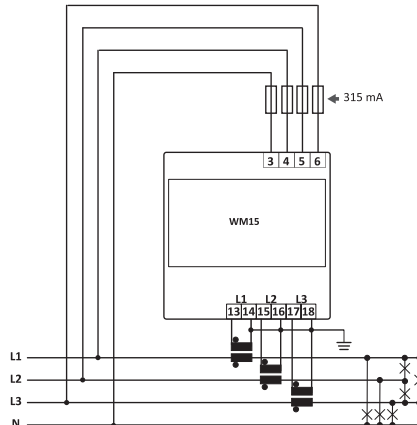


Fig. 6 Three-phase with neutral (4-wire)

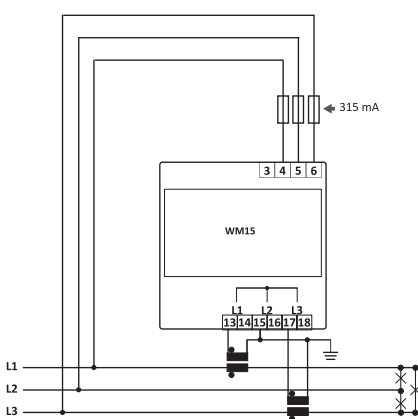


Fig. 7 Three-phase without neutral (3-wire)

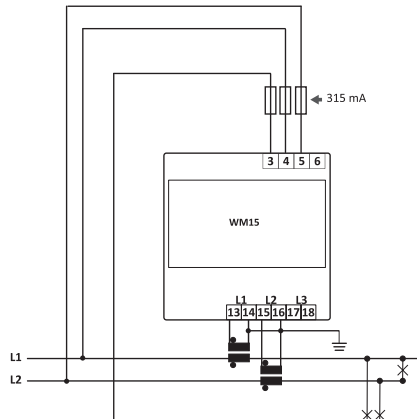


Fig. 8 Two-phase system with neutral (3-wire)

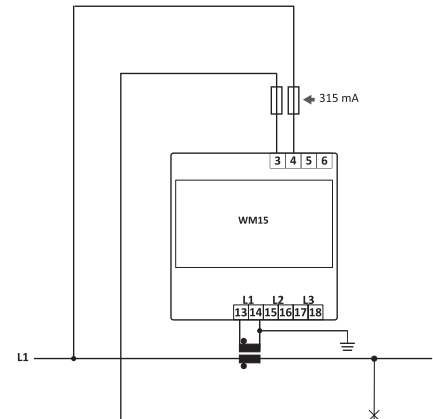


Fig. 9 Single-phase (2-wire)

MID models

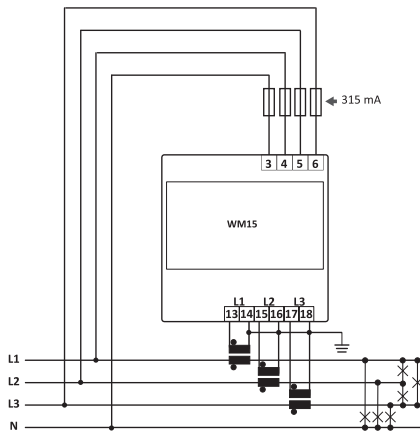


Fig. 10 Three-phase with neutral (4-wire)

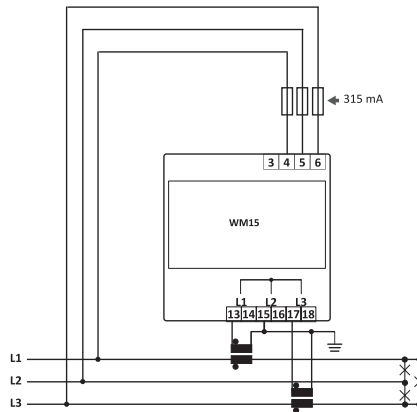


Fig. 11 Three-phase without neutral (3-wire) - ARON

Power supply (non MID models)

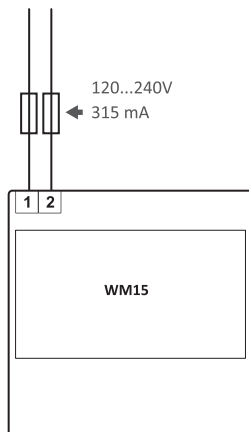


Fig. 12 Auxiliary power supply (H)

Output




Fig. 13 Digital output

Communication

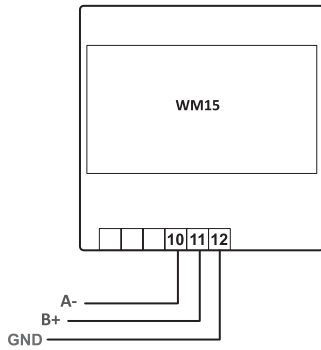


Fig. 14 RS485 port

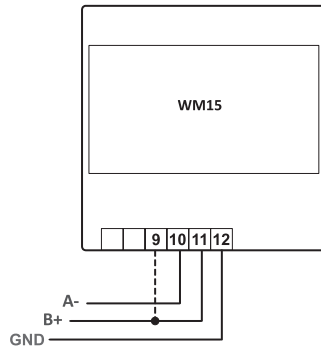


Fig. 15 Last device on RS485

References

Order code



WM15 96 AV5 3 X

Enter the code option instead of

| Code | Options | Description |
|--------------------------|---------|--|
| W | - | - |
| M | - | - |
| 1 | - | - |
| 5 | - | - |
| 9 | - | - |
| 6 | - | - |
| A | - | - |
| V | - | - |
| 5 | - | - |
| 3 | - | - |
| X | - | Self power supply. Voltage inputs 415 V LL |
| <input type="checkbox"/> | OS | Digital output and RS485 |
| <input type="checkbox"/> | OX | Digital output only |
| <input type="checkbox"/> | X | Non MID |
| <input type="checkbox"/> | PFB | MID (3P and 3P.n) |

- PFB: only the total positive totalizer (kWh+) is certified according to MID. The negative energy totalizer is available but not certified according to MID.




WM15 96 AV5 3 H OS X

| Code | Options | Description |
|------|---------|--|
| W | - | - |
| M | - | - |
| 1 | - | - |
| 5 | - | - |
| 9 | - | - |
| 6 | - | - |
| A | - | - |
| V | - | - |
| 5 | - | - |
| 3 | - | - |
| H | - | Auxiliary power supply, from 120 to 240 V ac/dc. Voltage inputs 600 V LL |
| OS | - | Digital output and RS485 |
| X | - | Non MID |


CARLO GAVAZZI compatible components

| Purpose | Component name/part number | NOTES |
|---|----------------------------|--|
| Quickly configure several analyzers via optical interface | OptoProg | See relevant datasheet |
| Configure analyzer via desktop application | UCS software | Available for free download at: www.productselection.net |
| Configure analyzer via Android application | UCS Mobile | Available for free download at: https://play.google.com/store |
| Aggregate, store and transmit data to other systems | UWP 3.0 | See relevant datasheet |
| Transit data via M-Bus | VMUBM2US1B1C | See relevant datasheet |



COPYRIGHT ©2021
Content subject to change. Download the PDF: www.productselection.net