# Energy Harvesting Board ADEH-P-B



#### **Features**

- Two MPPT DC-DC converter
- Power rail controller
- Sectioned for independent operation
- High efficiency for scavenging applications

#### Contents

1x PCB


### Description

The Adaptive energy harvesting board has been designed for energy harvesting, storage and management. The board is optimised for either a very low input voltage thermoelectric generator (TEG) or a photovoltaic source. The latest maximum power point tracking (MPPT) technology and a high efficiency boost converters used for optimum operation. Easily configurable for several output voltages.

The board has been sectioned to allow for three independant functions:

- 1. Ultra low power TEG power harvester (Boost converter) with storage capacitor and MPPT control
- 2. Low power photovoltaic / thermoelectric harvester (Boost converter) with adjustable MPPT control
- 3. Low loss OR-ing power rail controller for redundant applications

## System architecture

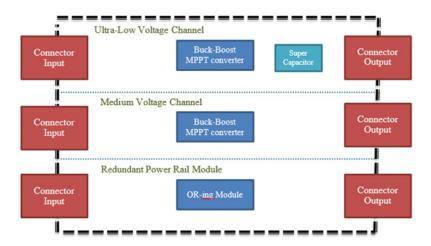

For more information visit: www.adaptivete.com



# Energy Harvesting Board ADEH-P-B

## Typical specifications

| Input voltage range (TEG harvester)     | 50mV - 500mV                     |
|---|----------------------------------|
| Output voltage 1 (TEG harvester)        | Selectable: 2.5V, 3V, 3.7V, 4.5V |
| Output Current 1 (TEG harvester)        | 7mA (VOUT = 0V)                  |
| Output Voltage 2 (TEG harvester)        | LDO 2.2V                         |
| Output Current 2 (TEG harvester)        | 11mA (VLDO = 0V)                 |
| Input Voltage Range (Solar harvester)   | 250mV-5V                         |
| Output Voltage (Solar harvester)        | Selectable: 1.8V, 3.3V, 5.0V     |
| Output Current (Solar harvester)        | 500mA                            |
| Input Voltage Range (OR-ing controller) | 800mV-16.5V                      |
| Output Voltage (OR-ing controller)      | 800mV-16.5V                      |
| Output Current (OR-ing controller)      | 2A                               |

### Further information

- Kit application type Power management
- Application sub type Step up DC/DC converter with MPPT
- Silicon core number LTC3108-1, LTC3105, TPS2412

For more information visit: www.adaptivete.com

