
19, 21, 22, 23, 24, 25, 31, 32, SS (used only when special type and/or 33, 34, 35, 40, 41, 43, 44, 45, packaging options are required) 48, 4P, 60, 61, 62, 63, 64, 65, - Lead bending / cutting: 6P, 75, 77, 91, 92, 93, 94, 95, Sx. Dx 96, 97, 98, 99 - Metal or plastic holder: all others **BP** - frequency: (21, 26, 30, 33, 36, 38, 40, 56) kHz (00 = no band pass)

Example: TSOP1236TB1 = receiver with $f_0 = 36$ kHz, bent in a top view holder, and solder plated leads

PRODUCT DESIGNATION AND SELECTION FOR VSOP IR RECEIVER CHIP PACKAGE

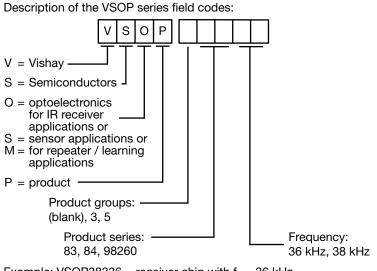

Example: VSOP38336 = receiver chip with $f_0 = 36$ kHz

www.vishay.com

Rev. 2.4, 28-Jun-17

ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishav.com/doc?91000

Vishay Semiconductors

General Information

