

INTERCONNECTS

SERIES 342 • .100" GRID BOARD STACKING HEADERS • SINGLE ROW STRIPS

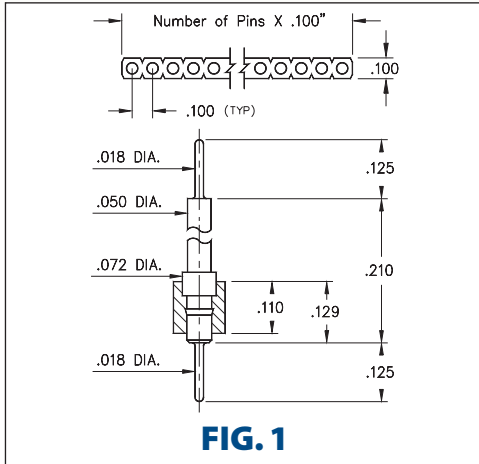


FIG. 1

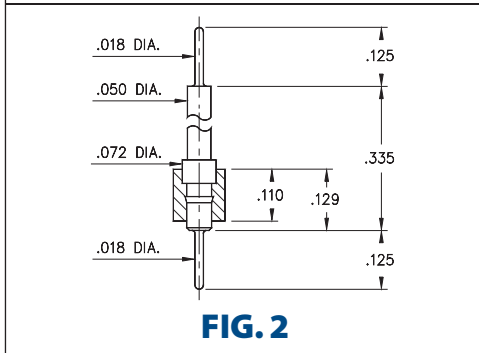


FIG. 2

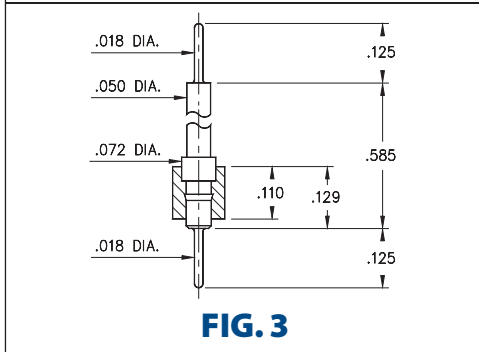


FIG. 3


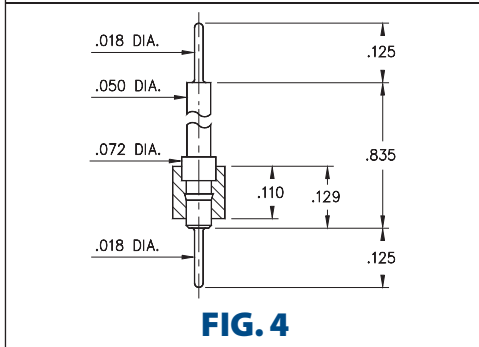


FIG. 4

- Series 342 interconnect header strips come in four heights with .018" dia. pluggable solder tails at both ends

- 342...591 uses pin #4259-1 (L = .210")
 - 342...592 uses pin #4259-2 (L = .335")
 - 342...593 uses pin #4259-3 (L = .585")
 - 342...594 uses pin #4259-4 (L = .835")
- See page 212 for details

- Insulators are high temperature thermoplastic, suitable for all soldering operations

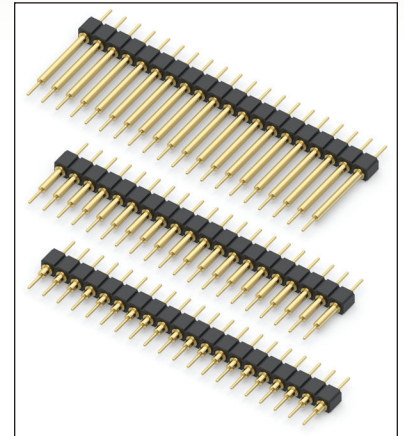

ORDERING INFORMATION

FIG. 1	Series 342...591	.018" / .018" Dia. Solder Tails
	342-XX-1	-00-591000 Specify number of pins → 01-64
FIG. 2	Series 342...592	.018" / .018" Dia. Solder Tails
	342-XX-1	-00-592000 Specify number of pins → 01-64
FIG. 3	Series 342...593	.018" / .018" Dia. Solder Tails
	342-XX-1	-00-593000 Specify number of pins → 01-64
FIG. 4	Series 342...594	.018" / .018" Dia. Solder Tails
	342-XX-1	-00-594000 Specify number of pins → 01-64



XX=Plating Code
See Below

For
Electrical, Mechanical
& Environmental Data,
See page 264

SPECIFY PLATING CODE XX=	10 ◆	90	40 ◆	
Pin Plating	10 μ" Au	200 μ" Sn/Pb	200 μ" Sn	

