

DUAL-IN-LINE SOCKETS

SERIES 110, 410 • RELAY AND ZIG-ZAG SOCKETS




Fig. 1




Fig. 2




Fig. 3









Fig. 4



○ = Loaded Position ● = Empty Position



- Relay sockets accept devices with I/O pins on 2,54 grid
- Additional Relay DIP socket patterns are available on Page 135
- Zig-Zag strip sockets are suitable for IC's and memory chips with staggered double row patterns
- Series 110 and 410 use MM #1001 receptacles. See page 165 for details
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 253 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- For Electrical, Mechanical and Environmental Data, see page 264 for details

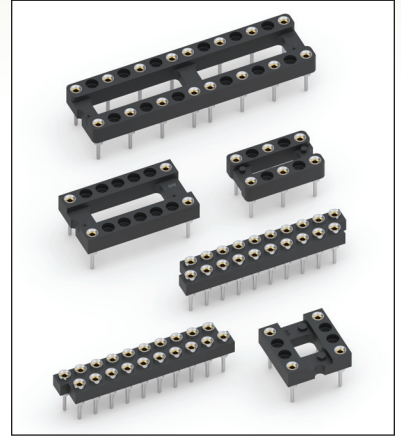

ORDERING INFORMATION

Selectively Loaded Sockets For Dual-In-Line Relays

	Number of Pins	Ordering Information
FIG. 1	6	110-XX-210-10-001000
FIG. 2	4	110-XX-308-10-001000
FIG. 3	4	110-XX-314-10-001000
FIG. 4	16	110-XX-328-10-001000

Staggered (Zig-Zag) Strip Sockets

Dim 'A'	Number of Pins	Insulator Body	Ordering Information
18,97	14	Left, Stackable	410-XX-214-10-001000
18,97	14	Right, Stackable	410-XX-214-10-002000
21,51	16	Left, Stackable	410-XX-216-10-001000
21,51	16	Right, Stackable	410-XX-216-10-002000
26,59	20	Left, Stackable	410-XX-220-10-001000
26,59	20	Right, Stackable	410-XX-220-10-002000
31,67	24	Left, Stackable	410-XX-224-10-001000
31,67	24	Right, Stackable	410-XX-224-10-002000
36,75	28	Left, Stackable	410-XX-228-10-001000
36,75	28	Right, Stackable	410-XX-228-10-002000

XX=Plating Code
See Below

RoHS-2
2011/65/EU

SPECIFY PLATING CODE XX=	13	93	43
Sleeve (Pin)	0,25µm Au	508µm Sn/Pb	5,08µm Sn
Contact (Clip)	0,76µm Au	0,76µm Au	0,76µm Au

