

FFSD-10-D-02.00-01-N

FFSD SERIES

(1.27 mm) .050"

TIGER EYE™ FLAT IDC WIRE CABLES

Mates with:
 FTS, FTSH, EHF,
 SHF, ESHF



SPECIFICATIONS

For complete specifications see www.samtec.com?FFSD

- Insulator Material:**
PBT
- Contact:**
BeCu
- Plating:**
10 μ" (0.25 μm) Au over 50 μ" (1.27 μm) Ni on contact area; Sn over 50 μ" (1.27 μm) Ni on balance
- Wire:**
30 AWG
- Current Rating (FFSD/FTSH):**
2.3 A per pin
(1 pin powered per row)
- Operating Temp Range:**
-40 °C to +105 °C
- Lead Size Accepted:**
(0.41 mm) .016" SQ
- Contact Resistance:**
15 mΩ
- Insertion Depth:**
(2.64 mm) .104" to (3.17 mm) .125"
- RoHS Compliant:**
Yes

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality

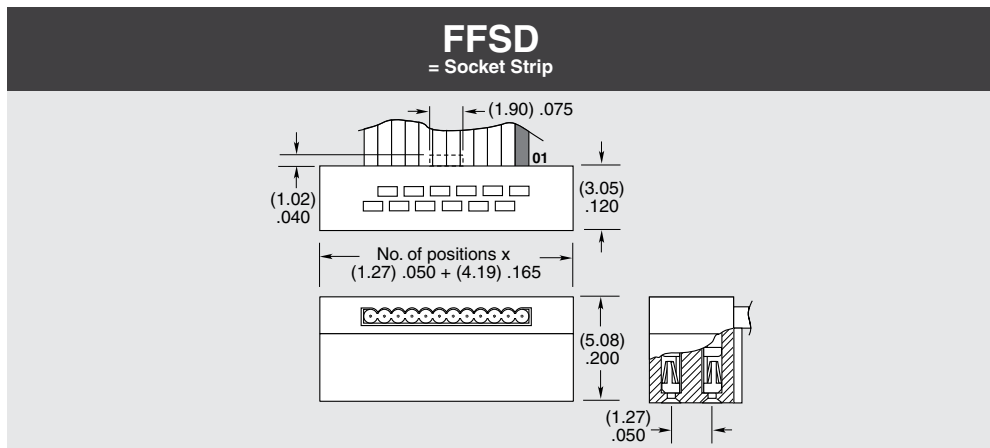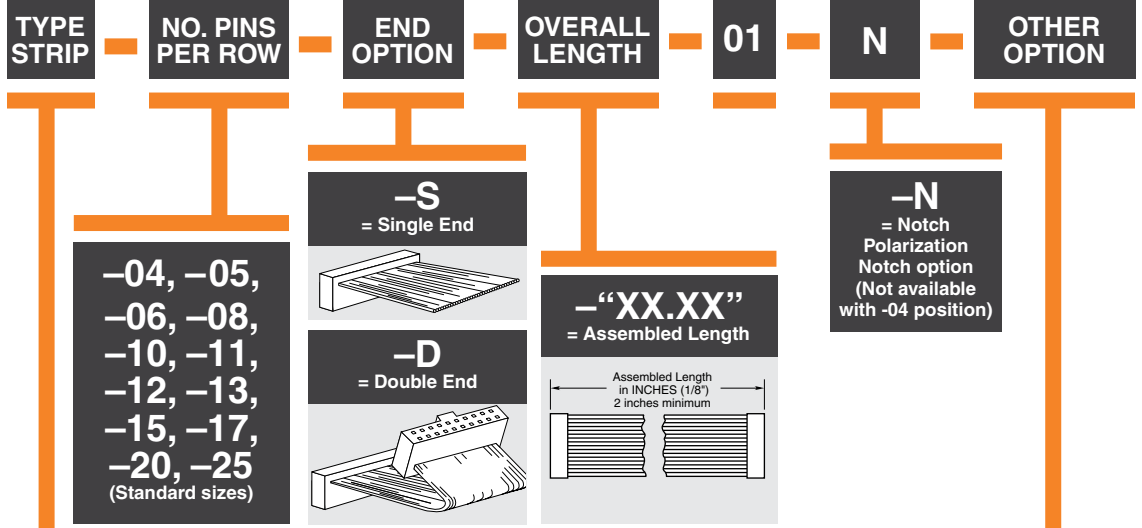

ALSO AVAILABLE (MOQ Required)

- Other sizes
- Contact Samtec.

Note: This Series is non-standard, non-returnable.

