


Thin Film Surface Mounted RF Capacitor



Product may not be to scale

RFCS series of thin film capacitors on silicon are designed for RF circuits that require exceptional performance at frequencies up to 20 GHz. The unique structure of the RFCS capacitors is based on thin-film electrodes deposited on a highly conductive silicon substrate. This unique structure is characterized by low parasitic inductance allowing the capacitors to maintain their performance to higher frequencies than other technologies.

The RFCS replaces the HPC product line. Additional values and form factors available upon request.

FEATURES

- Industries highest SRF
- Low DCR, high Q
- Small size: 0.040" x 0.020" x 0.015"
- S parameter files available upon request
- High frequency up to 20 GHz
- Surface mount
- Case size: 0402
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


RoHS*
Available

HALOGEN FREE
Available

GREEN
(5-2008)
Available

Note

* This datasheet provides information about parts that are RoHS-compliant and / or parts that are non-RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information / tables in this datasheet for details.

APPLICATIONS

- Lumped element filters
- Impedance matching circuits
- Decoupling and DC blocking
- Smart cards
- Other high Q RF circuitry

| WV (DC) VALUES AND TOLERANCES | | |
|-------------------------------|-----------|------|
| CAPACITOR MODEL | RFCS | UNIT |
| Case Size | 0402 | |
| Capacitance Values | 0.2 to 27 | pF |
| Tolerance ⁽¹⁾ | ± 5 | % |
| DC Working Voltage | 50 | V |

Note

⁽¹⁾ ± 0.1 pF for values < 2 pF

| STANDARD ELECTRICAL SPECIFICATIONS | | |
|------------------------------------|--------------------------------|--------|
| PARAMETER | VALUE | UNIT |
| Capacitance Range ⁽²⁾ | 0.2 to 27 | pF |
| Maximum Working Voltage | Up to 50 | V |
| Operating Temperature | - 55 to + 125 | °C |
| Storage Temperature | - 55 to + 125 | °C |
| Temperature Coefficient | ± 100 | ppm/°C |
| ESD Classification ⁽³⁾ | Value dependant, up to class 2 | |


Notes

⁽²⁾ Custom values available upon request. See custom design section below

⁽³⁾ According to AEC-Q200 method 002. Contact factory for more details

| RF CHARACTERISTICS - typical values | | | | |
|--|----------|---------|--------------|----------------------------------|
| CAPACITANCE (pF) | Q | | SRF (GHz) | MAX. OPERATING VOLTAGE (V) |
| | AT 1 MHz | 100 MHz | | |
| 0.2 | 70 500 | 3190 | > 20 | 50 |
| 0.3 | 45 700 | 2050 | > 20 | 50 |
| 0.4 | 33 600 | 1490 | 19.4 | 50 |
| 0.5 | 26 500 | 1170 | 18.2 | 50 |
| 0.6 | 21 800 | 960 | 17.2 | 50 |
| 0.7 | 18 500 | 810 | 16.5 | 50 |
| 0.8 | 16 000 | 700 | 15.8 | 50 |
| 0.9 | 14 100 | 610 | 15.3 | 50 |
| 1 | 12 600 | 540 | 14.9 | 50 |
| 1.2 | 10 400 | 450 | 14.1 | 50 |
| 1.5 | 8170 | 350 | 13.2 | 50 |
| 1.8 | 6720 | 290 | 12.5 | 50 |
| 2.2 | 3360 | 130 | 10.6 | 50 |
| 2.7 | 2720 | 100 | 10.4 | 50 |
| 3.3 | 2220 | 80 | 10.2 | 25 |
| 3.9 | 1870 | 70 | 10.1 | 25 |
| 4.7 | 1540 | 60 | 9.9 | 25 |
| 5.6 | 1290 | 50 | 9.8 | 25 |
| 6.8 | 1060 | 40 | 9.6 | 25 |
| 8.2 | 870 | 30 | 9.4 | 25 |
| 10 | 710 | 25 | 9.3 | 25 |
| 12 | 600 | 21 | 9.1 | 16 |
| 15 | 470 | 20 | 8.9 | 16 |
| 18 | 400 | 15 | 8.8 | 16 |
| 22 | 320 | 10 | 8.6 | 10 |
| 27 | 260 | 10 | 8.5 | 10 |

| DIMENSIONS in inches (millimeters) | | | |
|---|--------|-------|---------------------|
| | LENGTH | WIDTH | THICKNESS |
| PART | 0.04 | 0.02 | 0.015 (0.5) ± 0.001 |
| Mounting Pad C ≥ 2.2 pF | 0.014 | 0.006 | |
| Mounting Pad C < 2.2 pF | 0.012 | 0.004 | |
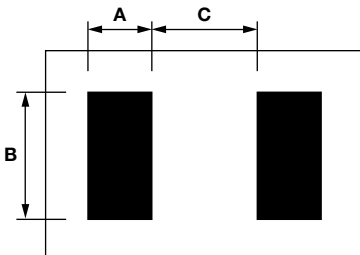
| FOOTPRINT DIMENSIONS in inches (millimeters) | | | |
|---|-------|-------|-------|
|  | | | |
| VALUE RANGE | A | B | C |
| 0.2 to 27 | 0.008 | 0.014 | 0.018 |




CUSTOM DESIGNED CAPACITORS

Vishay EFI will custom design and measure additional values and form factors upon request.
 Typical capacitance density is limited to: ~ 200 pF/mm²

| STANDARD TAPE AND REEL SPECIFICATIONS | | | | | | |
|---------------------------------------|---------|-----------|-----------------|----------------------|---------------|-----------|
| CASE SIZE OR STYLE | SIZE | TAPE SIZE | MAX. QTY / REEL | LEADER LENGTH (MIN.) | CAVITY SIZE | REEL SIZE |
| 0402 | 40 x 20 | 8 mm | 5000 | 400 mm | 0.045 x 0.024 | 7" |


| GLOBAL PART NUMBER INFORMATION | | | | | | | | | | | | | | | | |
|--|------|---|---|-------------------------------------|---|---|---|---|---|---|---|---|---|---|---|---|
| Global Part Number: RFCS04021000BKTT1 | | | | | | | | | | | | | | | | |
| Global Part Number Description: RFCS 0402 10 pF 10 % e1 T1 | | | | | | | | | | | | | | | | |
| R | F | C | S | 0 | 4 | 0 | 2 | 1 | 0 | 0 | 0 | B | K | T | T | 1 |
| MODEL | SIZE | CAPACITANCE (pF) | | INDUCTANCE MULTIPLIER CODE | | | TOLERANCE CODE | | TERMINATION | | PACKAGING CODE | | | | | |
| RFCS | 0402 | First 4 digits are significant figures of capacitance | | D = 0.0001 C = 0.001 B = 0.01 | | | J = 5 % K = 10 % M = 20 % L = 25 % B = ± 0.1 pF | | S = SnPb T = Lead (Pb)-free (e1) G = Gold | | WAFFLE WS = 100 min., 1 mult TAPE AND REEL T1 = 1000 min., 1000 mult | | | | | |

TYPICAL COMPONENT PERFORMANCE

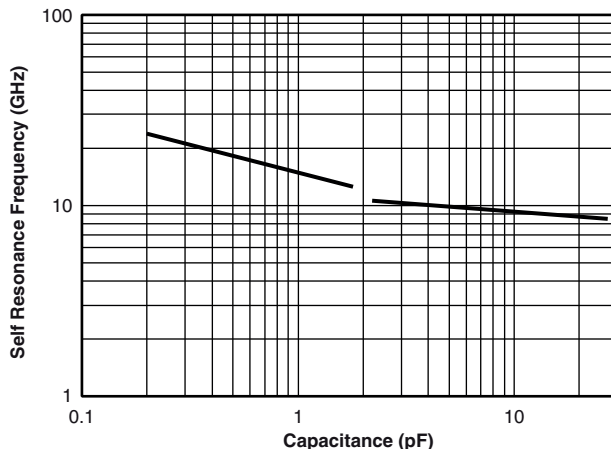

Self Resonance vs. Value

Two electrode geometries are used to cover the value range. For this reason the above plot exhibits discontinuity.

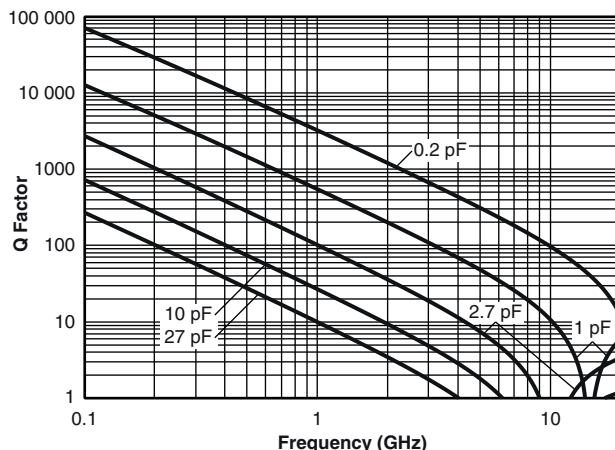

Quality Factor vs. Frequency



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.