

Silhouette® 100

Axial Bathroom/ Toilet Fans



Features & Benefits

- 17mm stylish ultra low profile grille
- Downstream airflow guide vanes for improved pressure development
- Designed for vertical or horizontal application
- Indication light (except B model)
- Fan IPX4 rated
- Suitable for wall, ceiling, panel and window mounting
- Meets current Building Regulations Approved Document F

Slimline Bathroom Ventilation

With a slim profile of only 17mm, Silhouette blends in with the wall surface to provide an unobtrusive installation. Silhouette has a FID performance of 21 l/s. Silhouette can be ceiling/panel mounted and connected to an appropriate duct run to the outside.



17mm actual profile

Models

Silhouette 100B

Single speed 100mm bathroom/toilet fan with indication light and back draught shutter.

Stock Ref

454055

Silhouette 100T

(Timer)

Single speed 100mm bathroom/toilet fan with integral adjustable electronic overrun timer (5-30 minutes), indication light and back draught shutter.

Stock Ref

454056

Silhouette 100H

(Humidity)

Single speed 100mm bathroom/toilet fan with integral adjustable auto humidity sensor from 60-90% RH, indication light and back draught shutter.

Stock Ref

454057

Silhouette 100TM

(PIR/Timer)

Single speed 100mm bathroom/toilet fan. Integral PIR operated model, (presence detector) with adjustable electronic overrun timer (5-30 minutes) indication light and back draught shutter.

Stock Ref


454058

Dimensions (mm)


A	BØ	C	D	E	F
160	100	80	97	200	32

Weight 0.6kg

Panel

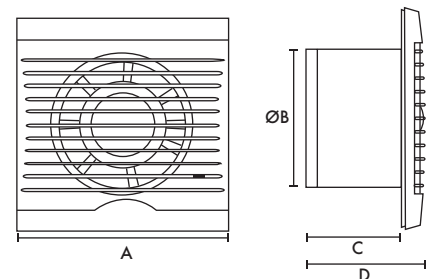

Wall

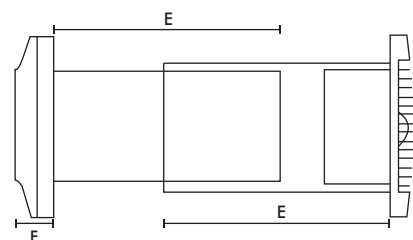

Fixing hole diameter 117mmØ

Wall Kit

Stock Ref

254102 (White)

254100 (Brown)

Window kit

Stock ref

442947

Performance

Model	Extract Performance - FID			Sound dB(A) @ 3m
	m³/h	l/s	Watts	
Silhouette 100B/T/H/TM	75	21	14	38