


**Wall mounted socket - Part no. 24207**


- SoftCONTACT
- switched
- with mechanical DUO-interlock
- fused
- with 1 RCD (0.03 A)

Protection type	IP 67
Ampere	63 A
Poles	3p
Voltage	230
Hertz	50-60Hz
Contact	standard
Connection technology	Screw terminals

Std. Pack. 1 Qty.

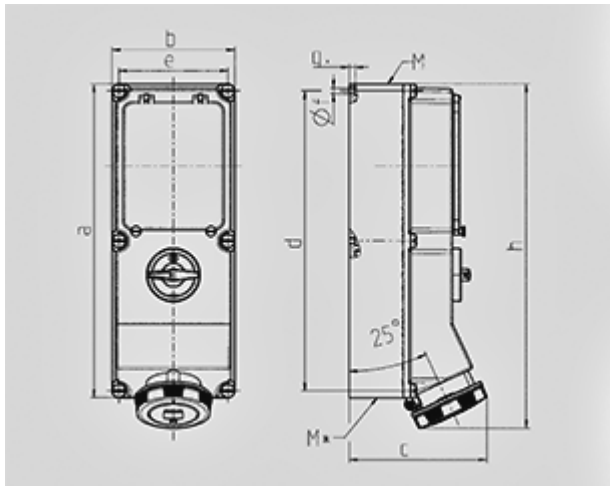

Drawing	Amp.	63		
		Poles		
1 MB 620		3	4	5
Dim. in mm	a	460	460	460
	b	180	180	180
	c	202	202	202
	d	440	440	440
	e	160	160	160
	f	8,1	8,1	8,1
	g	8	8	8
	h	505	505	505
	M	40	40	40
	M*	2x40	2x40	2x40
Max. cable diam. (mm)		27	27	27
Terminal for cond. cross section (mm <sup>2</sup> ) min.-max.		6	6	6
		-25	-25	-25