



STANDARD PACK

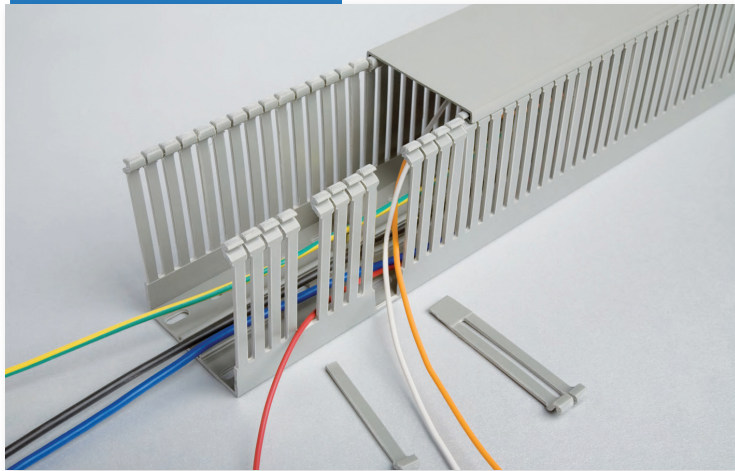


Betaduct PVC metric narrow open slot provides lightweight self-extinguishing cable trunking with excellent rigidity and performance characteristics. Its restricted slot design, enables the wire to be retained in the slot.

Recommended fixing method - Betaduct rivets. Supplied with a lid. Available in 9 sizes. Standard 2m lengths.

Side Slot Design



Base Hole Design

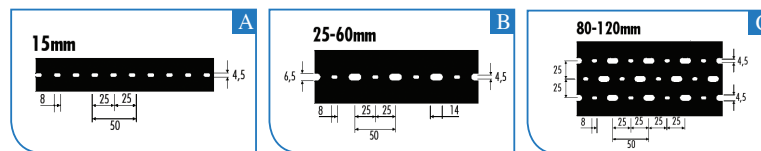

Specification:

Material: Self-extinguishing PVC

Slot Pitch: 10mm

Slot Width: 4mm

Webs: 6mm

Flammability: UL94 V-0 Rated material

Service temperature rating: 15°C to + 60°C

Standards: RoHS 2 compliant, UL94 V-0, A Norme EN50085-2-3, CSA, UR, RINA, CE marked

Part Numbers:

RS PART NO.	BETADUCT PART NO.	EXTERNAL SIZE W X H (mm)	USABLE SECTION (mm ²)	BASE HOLE DESIGN	SIDE SLOT DESIGN	C	D	P	PACK QUANTITY METRES
8781145	10440022	25 x 40	760	B	1	4	6	10	60
8781160	10440023	25 x 60	1200		1	4	6	10	40
8781176	10440032	40 x 40	1310	B	1	4	6	10	40
8781123	10440033	40 x 60	1960		1	4	6	10	36
8781108	10440034	40 x 80	2680		2	4	6	10	24
8781198	10440063	60 x 60	3080	B	1	4	6	10	24
8781110	10440064	60 x 80	4200		2	4	6	10	24
8781132	10440084	80 x 80	5695	C	2	4	6	10	24
8781182	10440085	80 x 100	7125		1	4	6	10	16