



STANDARD PACK

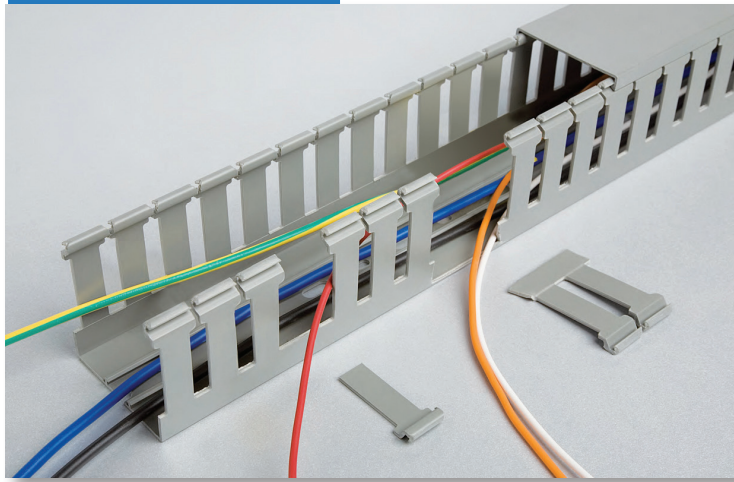


Betaduct PVC metric open slot provides lightweight self-extinguishing cable trunking with excellent rigidity and performance characteristics. A smooth wire entry allows for quick and easy re-routing of wires.

Supplied with a lid. Available in 13 sizes.

Side Slot Design

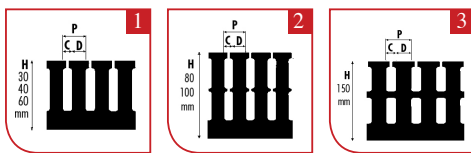

Base Hole Design

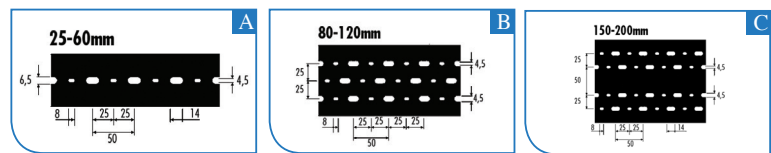

Specification:

Material: Self-extinguishing PVC

Slot Pitch: 20mm

Slot Width: 8mm

Webs: 12mm

Flammability: UL94 V-0 Rated material

Service temperature rating: 15°C to + 60°C

Standards: RoHS 2 compliant, UL94 V-0, A Norme EN50085-2-3, CSA, UR, RINA, CE marked

Part Numbers:

RS PART NO.	BETADUCT PART NO.	EXTERNAL SIZE WXH (mm)	USABLE SECTION (mm ²)	BASE HOLE DESIGN	SIDE SLOT DESIGN	C	D	P	PACK QUANTITY METRES
8781154	10430022	25 x 40	760	A	1	8	12	20	60
8781167	10430023	25 x 60	1200		1	8	12	20	40
8781186	10430024	25 x 80	1540		2	8	12	20	32
8781142	10430032	40 x 40	1310	A	1	8	12	20	40
8781164	10430033	40 x 60	1960		1	8	12	20	36
8781120	10430034	40 x 80	2680		2	8	12	20	24
8781202	10430062	60 x 40	1960	A	1	8	12	20	24
8781195	10430063	60 x 60	3080		1	8	12	20	24
8781189	10430064	60 x 80	4200		2	8	12	20	24
8781192	10430065	60 x 100	5320		2	8	12	20	16
8781170	10430084	80 x 80	5695	B	2	8	12	20	24
8781205	10430085	80 x 100	7125		2	8	12	20	16
8781173	10430104	100 x 80	7215	B	1	8	12	20	16