


ΩDBK HPG Series PTC Heaters

Specifications

Rated Voltage:	100 to 240VAC 12 to 30VAC/DC
Leadwire:	Silicone, UL 3135, white, AWG20 Length = 100±5mm (as standard) Termination 6mm splice crimp
Surface Temperature:	04 (40°C) up to 24 (240°C) in 10°C increments (±7°C)
Dimensions:	Width W = 35mm (13, 20, 44 on request) Length L = 40mm / 60mm (other on request)

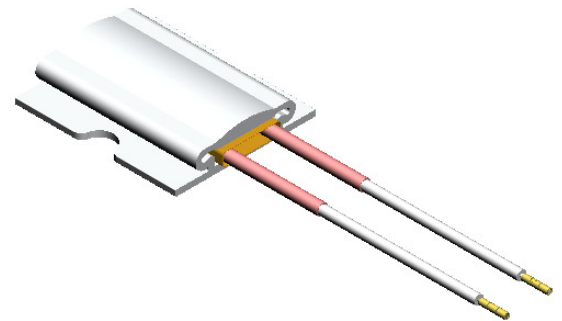

Leadwire length
not shown to scale

- Self regulating PTC heater
- Protection Class II
- RoHS compliant
- Custom size and performance available in quantity

Ordering Information

HPG 1/06 40X35 100-240V

Series Name	Rated Voltage
Surface Temperature 04 (40°C) up to 24 (240°C) in 10°C increments (±7°C)	Dimensions L X W (mm)

