



820/821/823/824 Series Panel Mount Enclosed Fuse Holders

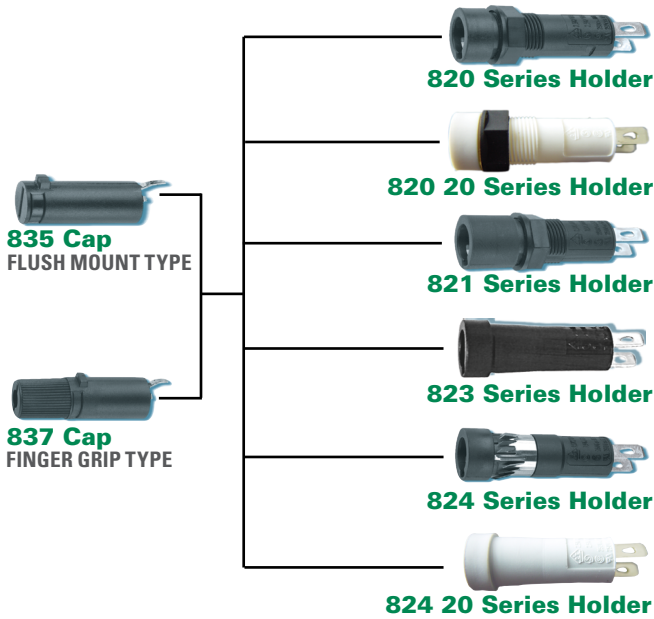


Dimensions 820

820 Series

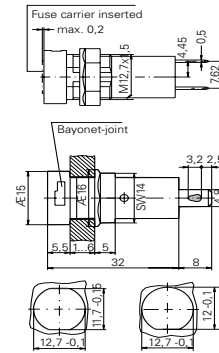

821 Series

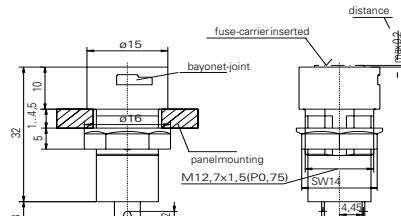

Additional Information



Datasheet
820 Series



Resources
820 Series



Samples
820 Series



Datasheet
821 Series



Resources
821 Series



Samples
821 Series



Datasheet
823 Series



Resources
823 Series



Samples
823 Series



Datasheet
824 Series




Resources
824 Series




Samples
824 Series


823 Series

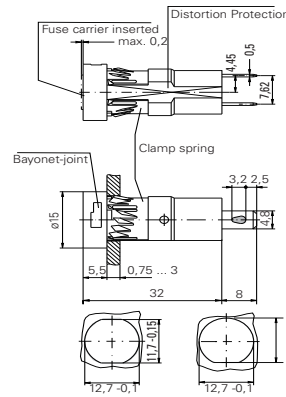


824 Series







835 Cap



837 Cap



Product Characteristics

	820 Series	820 20 Series	821 Series	823 Series	824 Series	824 20 Series
Compatible Fuses	5x20mm	5x20mm	5x20mm	5x20mm	5x20mm	5x20mm
Materials	Holder/Cap: Black Thermoplastic Polyamide PA 6.6, UL 94 V-0	Holder/Cap: White Thermoplastic PBT, UL94 V-0 Nut: Thermoplastics, Polyamid PA 6.6, black, UL94 V-0	Holder/Cap: Thermoplastic (Polyamide PA 6.6), black, UL94 V-0	Holder/Cap: Black Thermoplastic Polyamide PA 6.6, UL94 V-0	Holder/Cap: Thermoplastic (Polyamide PA 6.6), UL 94V-0, black	Holder/Cap: Thermoplastic (Polyamide PA 6.6), UL94 V-0, white
	Metal Parts: Copper alloy, corrosion protected					
	Clamp spring: Copper alloy, corrosion protected			Clamp Spring: Spring steel, non-treated		
Terminals: Solderable, tinned	Terminals: Solderable, tinned corrosion protected	Terminals: Solderable tinned	Terminals: Solderable tinned		Terminals: Solderable tinned	
Electrical Data (23°C)	Rated Voltage: 250V					
	Rated Current: 6.3A (VDE/SEMKO) 16A (UL/SA)					
	Rated Power: 4 W (VDE/SEMKO)	Rated Power: 2.5 W (VDE/SEMKO)	Rated Power: 4 W (SEMKO) 2.5 W (VDE)	Rated Power: 4 W (SEMKO)		Rated Power: 4 W (VDE/SEMKO)
Mounting	12.7mm diameter D-hole or double D-hole Admissible torque on plastic hex nut is 1.2Nm		12.7mm diameter D-hole or double D-hole (panel 1mm - 4.5mm) Admissible torque on plastic hex nut is 1.2Nm	Pluggable with clamping spring into 12.7mm diameter D-hole (panel thickness 0.75mm-3mm)	Pluggable (panel thickness 1.2 mm-2.5 mm)	
Terminals	Solderable or 4.8mm quick connect-fits 0.5mm tab					
Protection Category	IP 40 (IEC 60529) PC2 (IEC 60127-6)					
Operating Temperature	-25°C to +70°C (consider de-rating)					
Climatic Test	-25 °C/+70 °C/21 days (IEC 60068-2-1...3)					
Stock Conditions	+10°C to +60°C relative humidity ≤ 75% yearly average, without dew, maximum value for 30 days - 95%					
Vibration Resistance	24 cycles at 15 min. each (IEC 60068-2-6)10 - 60Hz at 0.75mm amplitude 60 - 2000Hz at 10g acceleration					
Contact Resistance	≤ 5mΩ					
Dielectric Strength	> 1.5 kV					
Impulse Voltage	4kV, 50Hz, 1min, dry	4kV with 1,2μs/50μs		4kV, 50Hz, 1 min., dry		
Insulation Resistance	> 10 ³ MΩ (500 VDC, 1 min.)					
Solderability	235°C, 3 sec (Wave) 350°C, 1 sec. (Solder Iron)	235°C, 2 sec. (Solder Bath) (IEC 60068-2-20) 350°C, 3 sec. (Solder Iron) (IEC 60068-2-20)		235°C, 3 sec. (Wave) 350°C, 1 sec. (Soldering Iron)		
Soldering Heat Resist	260°C, 5 sec. (IEC 60068-2-20)					
Min. Cross Section	Conductor - 2.5mm ²					
Marking	820, 250 V, Approvals		821, 250V, Approvals	823, 250V, Approvals	824, 250V, Approvals	
Unit Weight	4.0g (Holder) / 1.6g (835) / 2.2g (837)	4.0 g (820) / 1.6 g (835)	4.0g (821) / 1.6g (835) / 2.2g (837)	3.8g (Holder) / 1.6g (835) / 2.2g (837)	3.3g (824) / 1.6g (835) / 2.2g (837)	
Agency Approval						
Agency	Agency File Number					
	132225	125183	135536	122096	122098	128953
	608505	608504	608505	608506	608508	608507
	E 70164	E70164	E70164	E 70164	E70164	E70164
	47574	47574	47574	47574	47574	47574
Ordering Information						
Ordering Number: Holders	820 0000 000	820 0000 020	821 0000 000	823 0000 000	824 0000 000	824 0000 020
Ordering Number: Caps	Flush Mount Type: 835 0000 000 Finger Grip Type 837 0000 000					
Packaging	Bulk 100 Pcs all items listed above					