

Shock-Safe Fuseholder, 6.3 x 32 mm, NF, Fingergrip, IP 68



250 VAC · 3.6W / 16A (NF)



Description

- IP 68 from front-side
- Screw type fuse carrier

Standards

- NF C 93-436 - Modell HB14
- Contrôle de Conformité de Qualité (CCQ)

References

Fuseholder to 172582

Weblinks


[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Fuse-Link	6.3 x 32mm
Mounting	Panel Mount, Front Side
Mounting	Fixing Nut
Terminal	Solder
Rated Voltage	250 VAC
Rated current	16A (NF)
Rated Power Acceptance IEC	3.6W / 16A @ Ta 23°C
Degree of Protection	IP 68
Admissible Ambient Air Temp.	-40°C to 125°C
Climatic Category	40/125/56 acc. to IEC 60068-1
Material: Socket	Thermoset, black
Unit Weight	38 g
Storage Conditions	0°C to 60°C, max. 70% r.h.
Product Marking	Type, Rated voltage, Rated current

Soldering Methods	Iron
Contact Resistance	< mΩ at 20 mV
Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Dump Heat	acc. to NF C 20-604
Climatic Composite	acc. to NF C 20-619 Phase D
Admissible Torque on Fixing Nut	max 1.2Nm
Panel Thickness s	max 5mm

Dimension

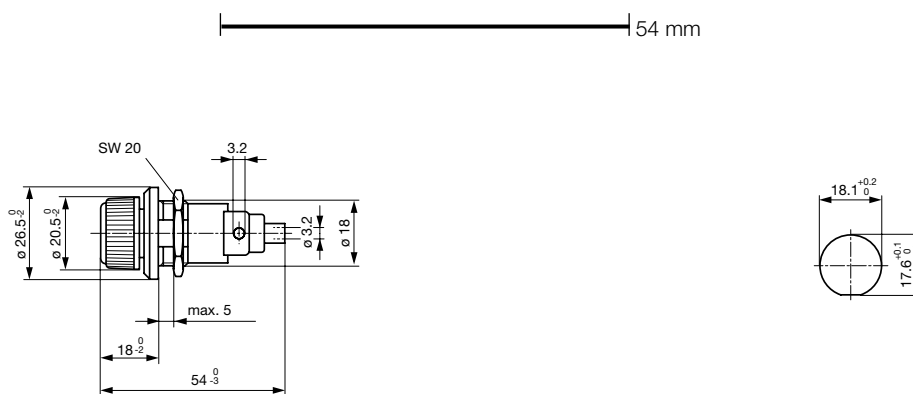

Mounting holes

All Variants

Holder	Cap	Degree of Protection	Order Number
●	Fingergrip	IP 68	7093.0110

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit Bulk (10 pcs.)

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.