


# NEOPRENE AND PVC NITRILE

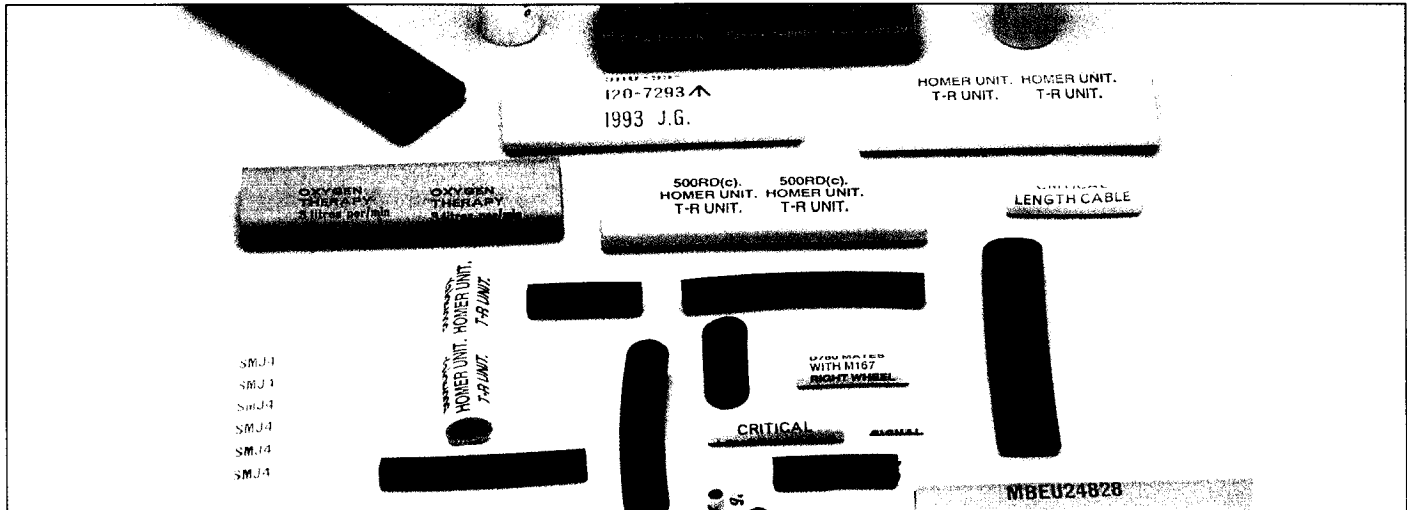

## NEOPRENE -65°C to +95°C

BS3G198 PT1 Type 1, BS3858 Type 1, I.E.C. 684-3-116-118  
Polychloroprene rubber markers and plain sleeves are ideally suited for the binding and identification of cable harnesses. Due to the materials elastomeric properties, a high degree of expansion can be achieved.

## NITRILE -65°C to +120°C

BS 3G198 PT1 Type 2  
BS 3858 Type 4, I.E.C. 684-3-151  
Modified nitrile rubber markers and plain sleeves are ideally suited for binding and identification applications which are outside the scope of the neoprene range.

NEOPRENE					PVC NITRILE				
PART NUMBER	NOMINAL		STANDARD LENGTH mm		PART NUMBER	NOMINAL		STANDARD LENGTH mm	
	I.D. mm	WALL mm	MARKER	PLAIN SLEEVE		I.D. mm	WALL mm	MARKER	PLAIN SLEEVE
TH5	0.5	0.5	3	•	HT5	0.5	0.6	3	•
TH8	0.75	0.5	3	•	HT8	0.75	0.6	3	•
TH10	1.0	0.5	3	20	HT10	1.0	0.6	3	20
TH12	1.2	0.5	3	•	HT15	1.5	0.6	3	20
TH15	1.5	0.6	3	•	HT20	2.0	0.6	5	20
TH20	2.0	0.6	5	•	HT30	3.0	1.0	5	25
TH30	3.0	0.6	5	•	HT50	5.0	1.0	5	25
TH50	5.0	0.85	5	•	HT75	7.5	1.25	10	25
TH75	7.5	0.9	10	•	HT100	10.0	1.4	10	25
TH100	10.0	1.0	10	•	HT150	15.0	1.4	10	•
TH150	15.0	1.2	10	•	HT200	20.0	1.4	20	•
H12	1.2	0.7	3	•	HT250	25.0	1.4	25	•
H15	1.5	0.8	3	20					
H20	2.0	0.8	5	20					
H25	2.5	0.8	5	•					
H30	3.0	0.8	5	25					
H40	4.0	1.1	5	•					
H50	5.0	1.1	10	25					
H75	7.5	1.3	10	25					
H100	10.0	1.5	10	25					
H150	15.0	1.7	10	•					
H200	20.0	2.1	10	•					
H250	25.0	2.1	10	•					

## ORDERING EXAMPLES:

