



[www.cif.fr](http://www.cif.fr)

**MILLING DRILL BIT**  
**Set of 5 bits**


**DW10.5**

---

This document contains manufacturer's information, protected through copyright. All rights reserved. This document can not be copied, reproduced or translated without written agreement from **C.I.F**

Information contained in this document can be modified without any prior notice

## CHARACTERISTICS

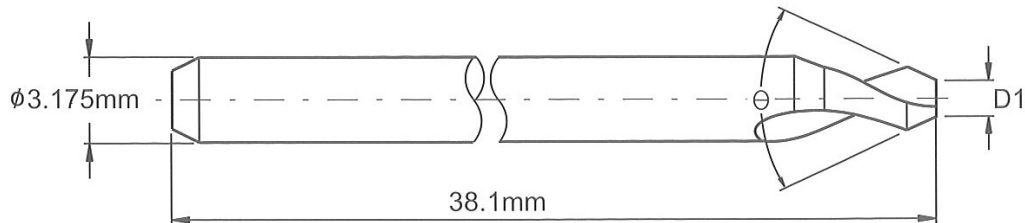

- **High precision milling drill bit**
- Monopiece carbide tool - Queue 3,17 mm (1/8") .
- Conical angle  $90^\circ$ .
- $D1 : 0.1\text{ mm}$
- High precision toll to mill tracks of  $0,2\text{ mm}$ .
- Minimum rotation speed  $25000\text{ rev/ mn}$
- Feed rate between  $4\text{ and }7\text{ mm/s}$ .

## UTILISATION

General use for milling on different type of PCB support such as epoxy (typical use), EMC-1, EMC-3, etc..

Isolation of  $0.2\text{ mm}$  for a milling depth of  $0.05\text{ mm}$ .

[cif@cif.fr](mailto:cif@cif.fr)