

Electronic housing - ME MAX 22,5 3-3 KMGY VPE1 - 2201320

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Electronic housing consisting of: Housing shells left and right, front plate, transparent cover, metal foot catch and spring, open housing, 24-pos. (6 x 4 pos.), width: 22,5 mm, color: Light gray

The illustration shows the housing versions

Why buy this product

- DIN rail bus connector as an option
- Plug-in connection with screw, spring-cage or fast connection technology
- Labels for additional labeling as an option
- Large PCB surface despite compact housing dimensions
- Large front surface for high-pos. plugs or operating and setting elements
- Easy module replacement without interrupting the contact chain
- The fitted cover is easy to adapt and print
- Transparent front cover can be swiveled
- Functional earth ground contact as an option



Key commercial data

| | |
|----------------------|---------------------|
| Packing unit | 1 |
| GTIN | 4 046356 766982 |
| Custom tariff number | 85472000 |

Technical data

| | |
|----------------------------------|------------------|
| Product type | Complete housing |
| Approval | UL Recognized |
| | cUL Recognized |
| | cULus Recognized |
| Width | 22.5 mm |
| Height | 114.5 mm |
| Depth | 99 mm |
| No. of pos. for cross connection | 5 |

Electronic housing - ME MAX 22,5 3-3 KMGY VPE1 - 2201320

Technical data

| | |
|---------------------------------|------------------------|
| Type of cross connection | DIN rail bus connector |
| Functional earth ground contact | Integrated |
| | without |
| Color | light gray (7035) |
| Connection method | Fixed |
| | Pluggable |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27180401 |
| eCl@ss 4.1 | 27180401 |
| eCl@ss 5.0 | 27180506 |
| eCl@ss 5.1 | 27180506 |
| eCl@ss 6.0 | 27180802 |
| eCl@ss 7.0 | 27182702 |
| eCl@ss 8.0 | 27182702 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001031 |
| ETIM 3.0 | EC001031 |
| ETIM 4.0 | EC001031 |
| ETIM 5.0 | EC001031 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31261501 |
| UNSPSC 7.0901 | 31261501 |
| UNSPSC 11 | 31261501 |
| UNSPSC 12.01 | 31261501 |
| UNSPSC 13.2 | 31261501 |

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / cULus Recognized


Ex Approvals


Electronic housing - ME MAX 22,5 3-3 KMGY VPE1 - 2201320

Approvals

Approvals submitted

Approval details

UL Recognized 

cUL Recognized 

cULus Recognized 

Accessories

Accessories

Ground contact

Electronic housing - ME FE-CONTACT - 2908294




Functional earth ground contact, for intermediate elements.

Drawings


Electronic housing - ME MAX 22,5 3-3 KMGY VPE1 - 2201320

Dimensioned drawing

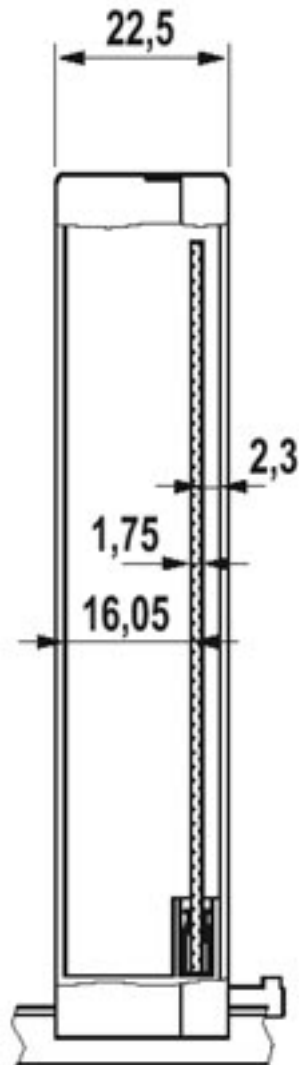

Electronic housing - ME MAX 22,5 3-3 KMGY VPE1 - 2201320

Dimensioned drawing

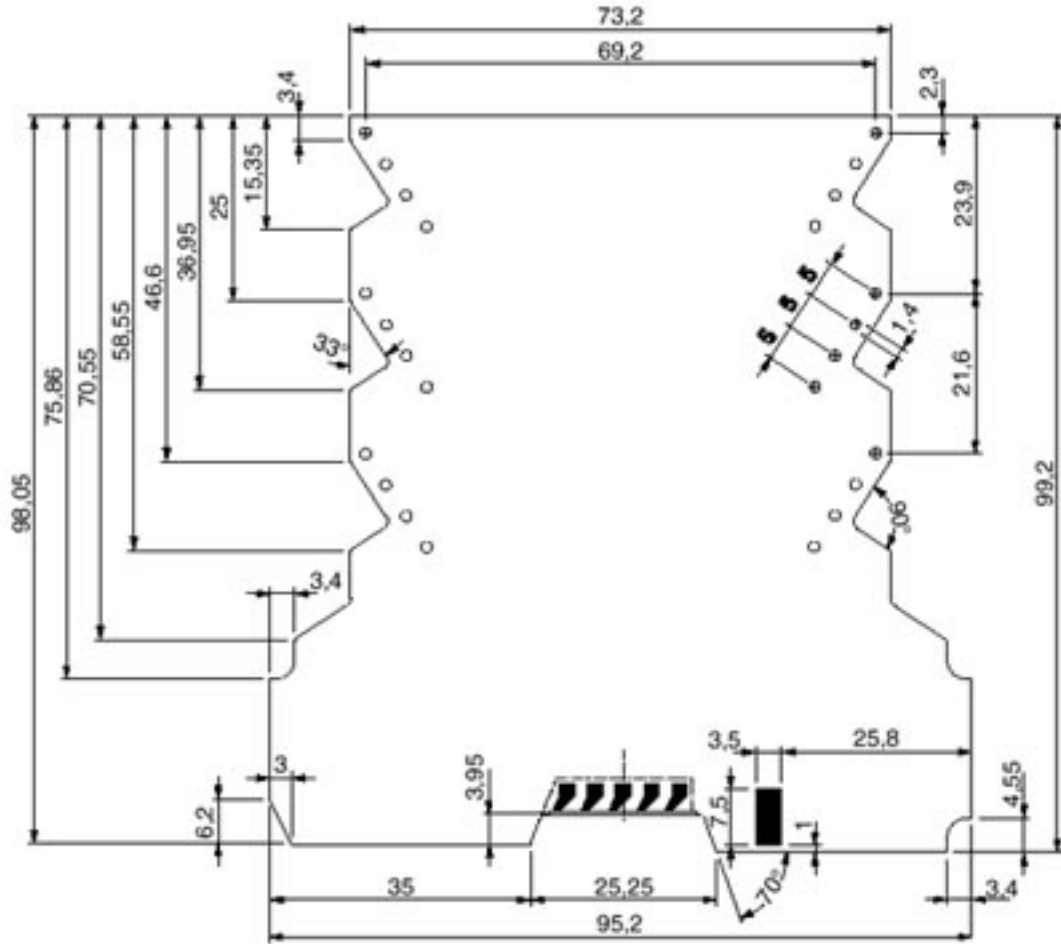

Dimensional drawing of the ME MAX 3-3 printed circuit board for plug connection (MSTBO), view: component side