


PC

Panel support clamp



ELESA Original design

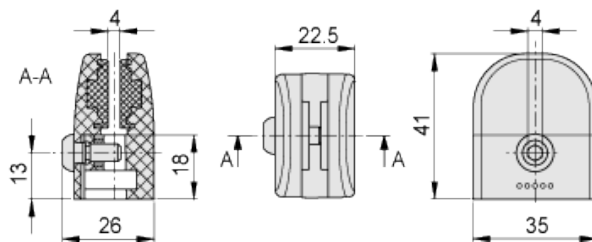

Elesa Standards		Weight
Code	Description	g
49301	PC.35	31

Material

Glass-fibre reinforced polyamide based (PA) technopolymer. Resistant to solvents, oils, greases and other chemical agents.

Colour

RAL 7042 grey, matte finish.

Pads


Thermoplastic elastomer, hardness 70, Shore A, overmoulded.

Adjusting spacers (included in the supply)

Polyamide based (PA) technopolymer, RAL 7042 grey colour clamp, for fastening panels with thickness higher than 4 mm. Once it is engaged in the housing, the spacer is constrained to the clamp by means of an undercut.

Assembly of the clamp on the profile

- M6 shorted cylindrical head screw with DIN 7984 hexagon socket (fig.1).
- DIN 933 M6 hexagonal head screw (fig. 2).
- DIN 439B or DIN 934 M6 hexagonal nut (fig. 3).

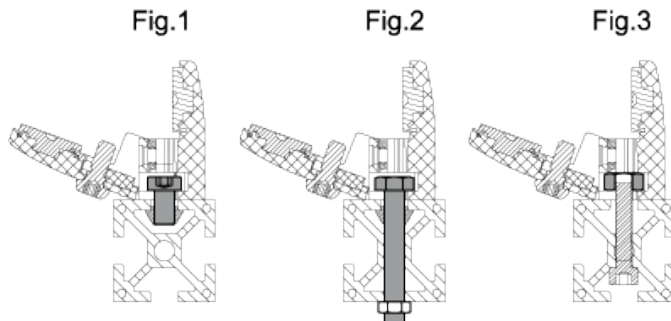

Features and applications

-The product is in compliance with the Machine Directive (2006/42/CE) that provides for the retention of all the clamping elements in the open position too. (ELESA patent)
The two parts of the tightening clamp are connected thanks to an articulated joint and they have got a seat for housing a screw and a M5 nut,

which are retaining as well.

- The special dimensions of the clamp allow its assembly on profiles with a width of 25 mm or higher.

- The panel assembly into the clamp require no drilling.

- The pads deform upon tightening to guarantee the perfect fastening of the inserted panel.

- The chemical bond of the overmoulded pads makes them a single body with the clamp. The embossed surface avoid any possible sticking of the pad to the panel over the time.

- The tightening clamp allows a direct assembly of panels with thickness from 3.1 mm to 4 mm. The assembly of panels with higher thicknesses, up to a maximum of 8 mm, is possible by inserting the spacers into a specific cavity provided in the clamp.

- To prevent machine danger zones being reached through any opening in the machine protection structure made of panels fixed with the PC clamp, it is necessary to keep a safety distance (Fig. 4) according to ISO 13857, section 4.2.4 (the safety distance is the minimum distance required between a protection structure and a potentially dangerous component of the machine).

Technical data

If the clamp is opened, the tightening screw does not yield below an extraction force of 250 N, without coming out from its housing.

During the tests carried out in our laboratories under controlled temperature and humidity (23°C-50% R.H.), under given conditions of use and for a limited period of time, the maximum load of each clamp is of 100 N (fig. 5).

The tightening screw of the panel and the assembly screws of the clamp on the profile have got the same hexagonal seat. Thus, it is possible to make the assembly by using only one hexagonal key (Ch.4).

Maximum tightening torque for the screw = 3.5 Nm.

Fig. 4


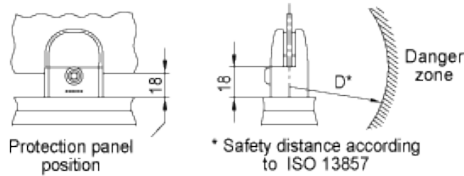


Fig. 5



s panel thickness [mm]	Adjusting spacer to be used
$3.1 \leq s < 4.1$	-
$4.1 \leq s < 5.1$	5mm
$5.1 \leq s < 6.1$	6mm
$6.1 \leq s < 7.1$	7mm
$7.1 \leq s < 8.0$	8mm

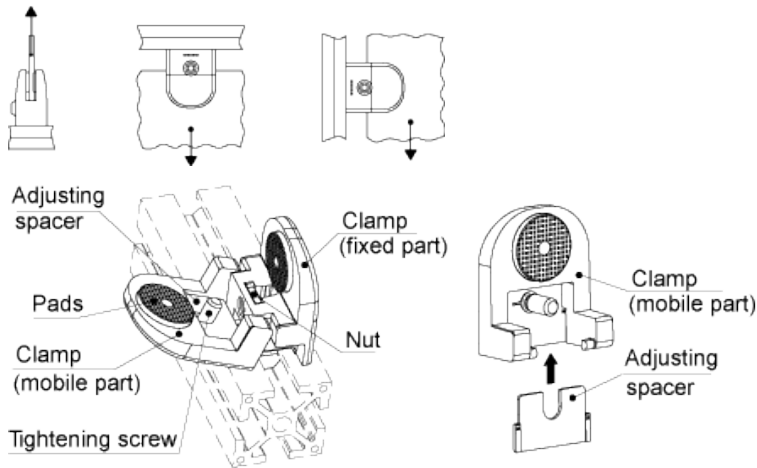

STANDARD MACHINE ELEMENTS WORLDWIDE

ELESA models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.