




Vero Wire

VEROWIRE

The Verowire wiring system is ideal for prototypes, breadboards and limited production runs. Finished results are of a high standard with a neat orderly appearance achieved in significantly less time than more conventional methods.

Features

- Low profile
- High speed applications
- Suitable for high-density wiring
- No headers required
- Low cost

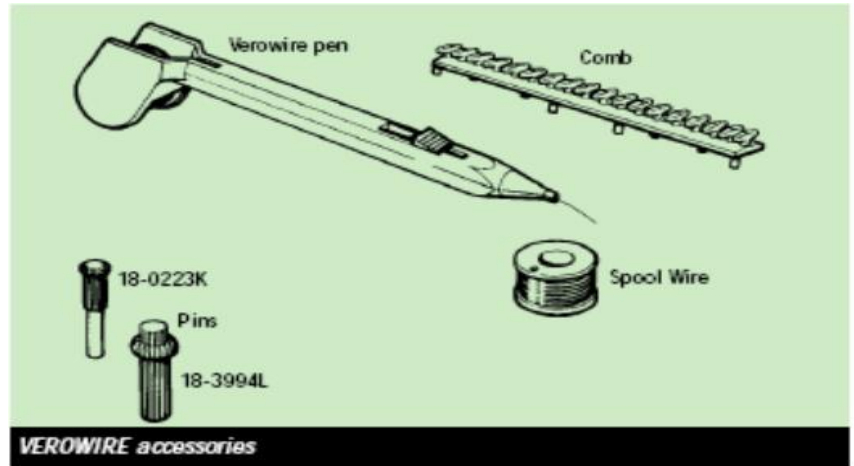

Wire specification

Diameter of wire: 0,15 mm (34 AWG) to 0.2mm
 Insulation: Self-fluxing polyurethane*
 Insulation Thickness: 0,005 mm
 Proof Voltage: 600V d.c.
 Current Rating: 0,100 A
 Resistance @ 20oC: 0,857 W/m
 Length of wire/spool: 40 m approx
 Colours: Pink, Gold

***WARNING!** When soldering through polyurethane enamelled wire a small quantity of TDI gas is produced. Use in a well ventilated room.

Ordering Information

Unit of Sale	Description	Order Code
1	Wiring Pen	79-1732
100	Wiring Combs	79-1735
4	Spoiled wire, Pink	79-1737
4	Pack 2 gold 2 Red wire	79-19038
4	Spoiled wire, Gold	79-1739

Recommended Pins for use with VeroWire:

Shoulder terminal Pin : Order Code: 18-3994
 Half Pin Order Code: 18-0223