FIBOX
Enclosing innovations

CAB CAB PC 504020 G

Sample photo

Order symbol:	CAB PC 504020 G	**EAN:**	6418074020321
Product nbr:	8113360	**El. number:**	
Description:	Cabinet, PC	Finland:	3424120
Remarks:	Latches on the long side	Denmark:	8212020265
		Italy:	7821055
		Sweden:	2539977
		Norway:	

Including: Cabinet base, door with EPDM gasket, latches, screws for mounting plate/DIN-rail and corner plugs.

Dimensions:	Length	Width	Height
mm:	500	400	200
inch:	19.7	15.7	7.9

Materials:

Material:	Polycarbonate
Base colour:	RAL 7035
Cover colour:	RAL 7035
Gasket material:	EPDM

Temperatures:

Short term:	-40 … 120 °C
Continuous:	-40 … 80 °C
Short term:	-40 … 250 °F
Continuous:	-40 … 175 °F

Accessories:

EKIV 54	Mounting plate
EKIV 37	DIN-35 Mounting rail
DS35370E1	DIN-35 Mounting rail
EKIV 47	DIN-35 Mounting rail
DS35470E1	DIN-35 Mounting rail
FP A 54	Swing-out door/Front plate
MB 12225 AL	Swing door set
FP 54	Front plate
FP 18X2-54	Front plate
DRF 54	DIN rail frame set

Rating:

Ingress Protection (EN 60529): IP 65
Impact Resistance (EN 62262): IK 08
Electrical insulation: Totally insulated
Halogen free (DIN/VDE 0472, Part 815): Yes
UV resistance: UL 508
Flammability Rating (UL 746 C 5): UL 746C 5V
Glow Wire Test (IEC 695-2-1) °C: 960
UL Type: UL TYPE 1, 4, 4X, 12, 13

Certificates:

Germanischer Lloyd (GL)
Underwriters Laboratories
Fimko
Lloyds Register of Shipping (LR)
Europe EN 62208: 2003
UL Canada
Gost R

CAB 500x400x200

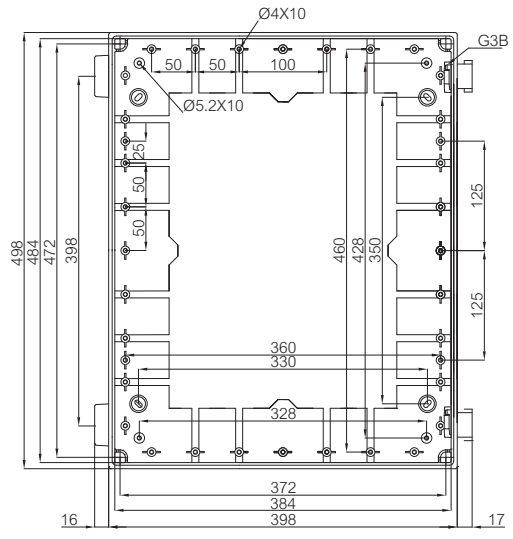

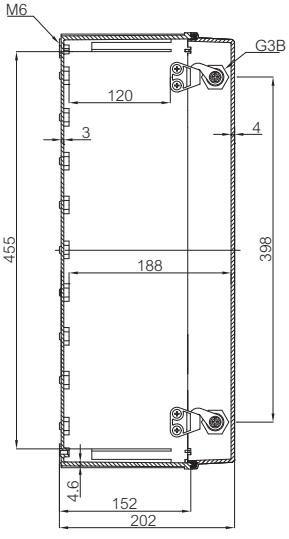

CAB 4050



CAB 5040



CAB 5040 G3B



© Fibox Oy, Data subject to change without notice (printed: 10.7.2013)