


TIMKEN

The Timken Company
 4500 Mt Pleasant St. NW
 N. Canton, OH 44720
 Phone: (234) 262-3000
 E-Mail: CustomerCAD@timken.com • Web site: www.timken.com

Timken Part Number 29675 - 29620, Tapered Roller Bearings - TS (Tapered Single) Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

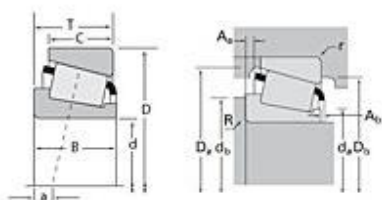

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	29600
Cone Part Number	29675
Cup Part Number	29620
Design Units	Imperial
Bearing Weight	2.10 lb 1.000 Kg
Cage Type	Stamped Steel

Dimensions

d - Bore	2.7500 in 69.850 mm
D - Cup Outer Diameter	4.4375 in 112.713 mm

B - Cone Width	1.0000 in 25.400 mm
C - Cup Width	0.7500 in 19.050 mm
T - Bearing Width	1.0000 in 25.400 mm

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius¹	0.060 in 1.520 mm
r - Cup Backface "To Clear" Radius²	0.130 in 3.30 mm
da - Cone Frontface Backing Diameter	3.66 in 76.96 mm
db - Cone Backface Backing Diameter	3.15 in 80.01 mm
Da - Cup Frontface Backing Diameter	4.33 in 109.00 mm
Db - Cup Backface Backing Diameter	3.98 in 101.09 mm
Ab - Cage-Cone Frontface Clearance	0.08 in 2 mm
Aa - Cage-Cone Backface Clearance	0.08 in 2 mm
a - Effective Center Location³	0.04 in 1.00 mm

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁴	6440 lbf 28600 N
C1 - Dynamic Radial Rating (1 million revolutions)⁵	24800 lbf 111000 N
C0 - Static Radial Rating	37200 lbf 166000 N
C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁶	5370 lbf 23900 N

Factors

K - Factor⁷	1.2
e - ISO Factor⁸	0.49
Y - ISO Factor⁹	1.23
G1 - Heat Generation Factor (Roller-Raceway)	77.7
G2 - Heat Generation Factor (Rib-Roller End)	43.3
Cg - Geometry Factor	0.117

¹ These maximum fillet radii will be cleared by the bearing corners.

² These maximum fillet radii will be cleared by the bearing corners.

³ Negative value indicates effective center inside cone backface.

⁴ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.


⁵ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁶ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁷ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

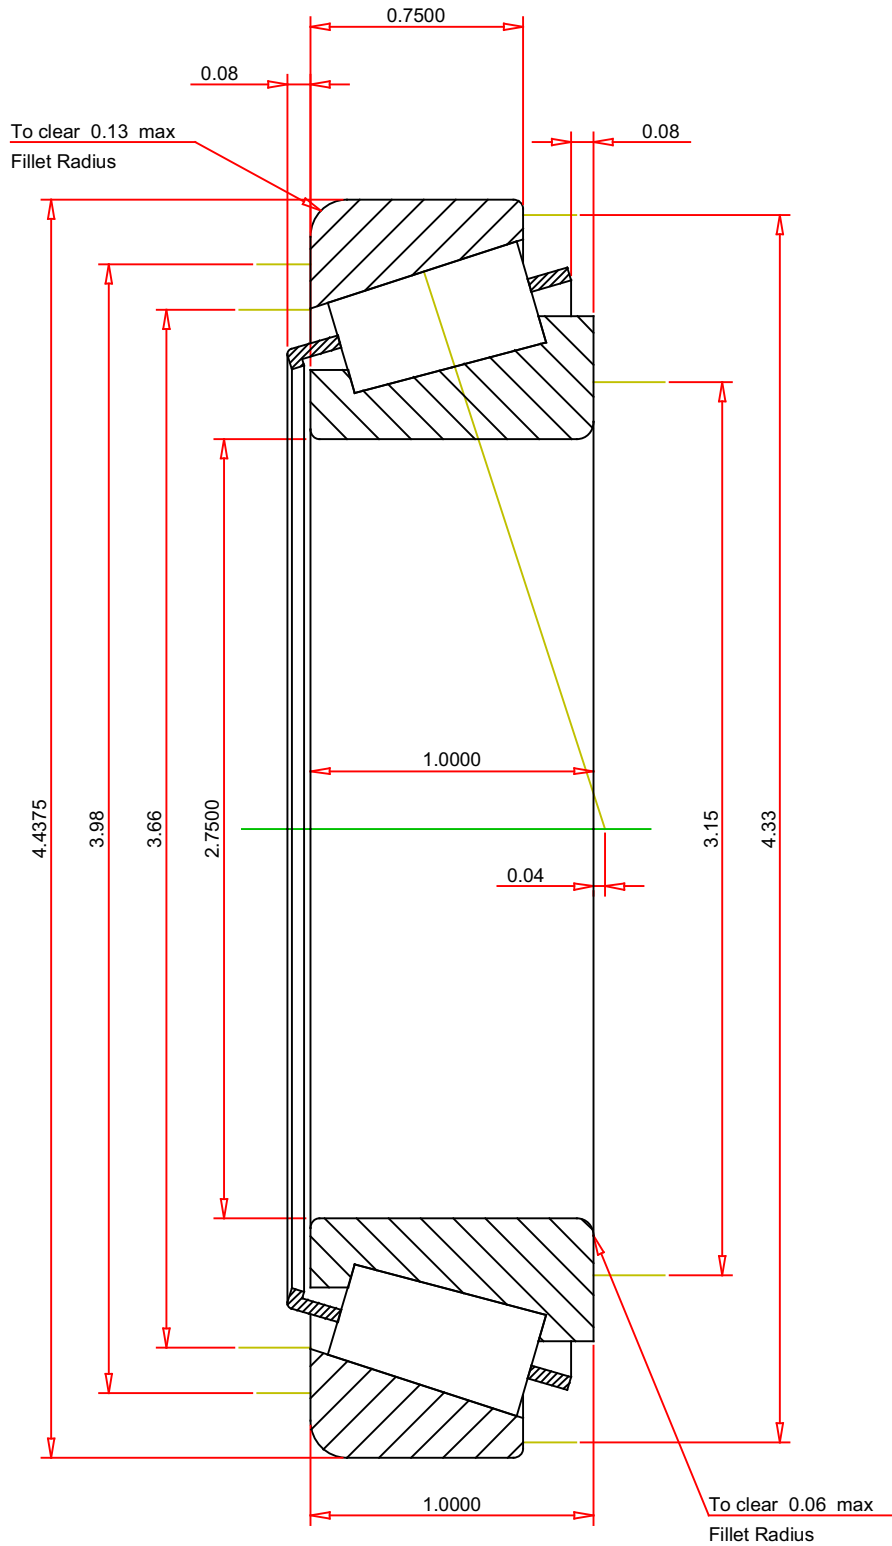

IMPERIAL UNITS

ISO Factor - e	0.49
ISO Factor - Y	1.23
Bearing Weight	2.1 lb
Number of Rollers Per Row	27
Effective Center Location	0.04 inch

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

29675 - 29620
TS BEARING ASSEMBLY

K Factor	1.2
Dynamic Radial Rating - C90	6440 lbf
Dynamic Thrust Rating - Ca90	5370 lbf
Static Radial Rating - C0	37200 lbf
Dynamic Radial Rating - C1	24800 lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY