

TIMKEN

The Timken Company
 4500 Mt Pleasant St. NW
 N. Canton, OH 44720
 Phone: (234) 262-3000
 E-Mail: CustomerCAD@timken.com • Web site: www.timken.com

Timken Part Number 28682 - 28622, Tapered Roller Bearings - TS (Tapered Single) Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.



[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	28600
Cone Part Number	28682
Cup Part Number	28622
Design Units	Imperial
Bearing Weight	0.700 Kg 1.60 lb
Cage Type	Stamped Steel

Dimensions

d - Bore	57.150 mm 2.2500 in
D - Cup Outer Diameter	97.630 mm 3.8437 in

B - Cone Width	24.608 mm 0.9688 in
C - Cup Width	19.446 mm 0.7656 in
T - Bearing Width	24.608 mm 0.9688 in

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius¹	3.560 mm 0.14 in
r - Cup Backface "To Clear" Radius²	0.76 mm 0.030 in
da - Cone Frontface Backing Diameter	62.99 mm 2.48 in
db - Cone Backface Backing Diameter	70.10 mm 2.76 in
Da - Cup Frontface Backing Diameter	92.96 mm 3.66 in
Db - Cup Backface Backing Diameter	87.88 mm 3.46 in
Ab - Cage-Cone Frontface Clearance	2.5 mm 0.1 in
Aa - Cage-Cone Backface Clearance	1 mm 0.04 in
a - Effective Center Location³	-3.30 mm -0.13 in

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁴	32000 N 7180 lbf
C1 - Dynamic Radial Rating (1 million revolutions)⁵	123000 N 27700 lbf
C0 - Static Radial Rating	142000 N 32000 lbf
C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁶	22000 N 4950 lbf

Factors

K - Factor⁷	1.45
e - ISO Factor⁸	0.40
Y - ISO Factor⁹	1.49
G1 - Heat Generation Factor (Roller-Raceway)	54
G2 - Heat Generation Factor (Rib-Roller End)	20.2
Cg - Geometry Factor	0.0979

¹ These maximum fillet radii will be cleared by the bearing corners.

² These maximum fillet radii will be cleared by the bearing corners.

³ Negative value indicates effective center inside cone backface.

⁴ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.


⁵ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁶ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁷ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

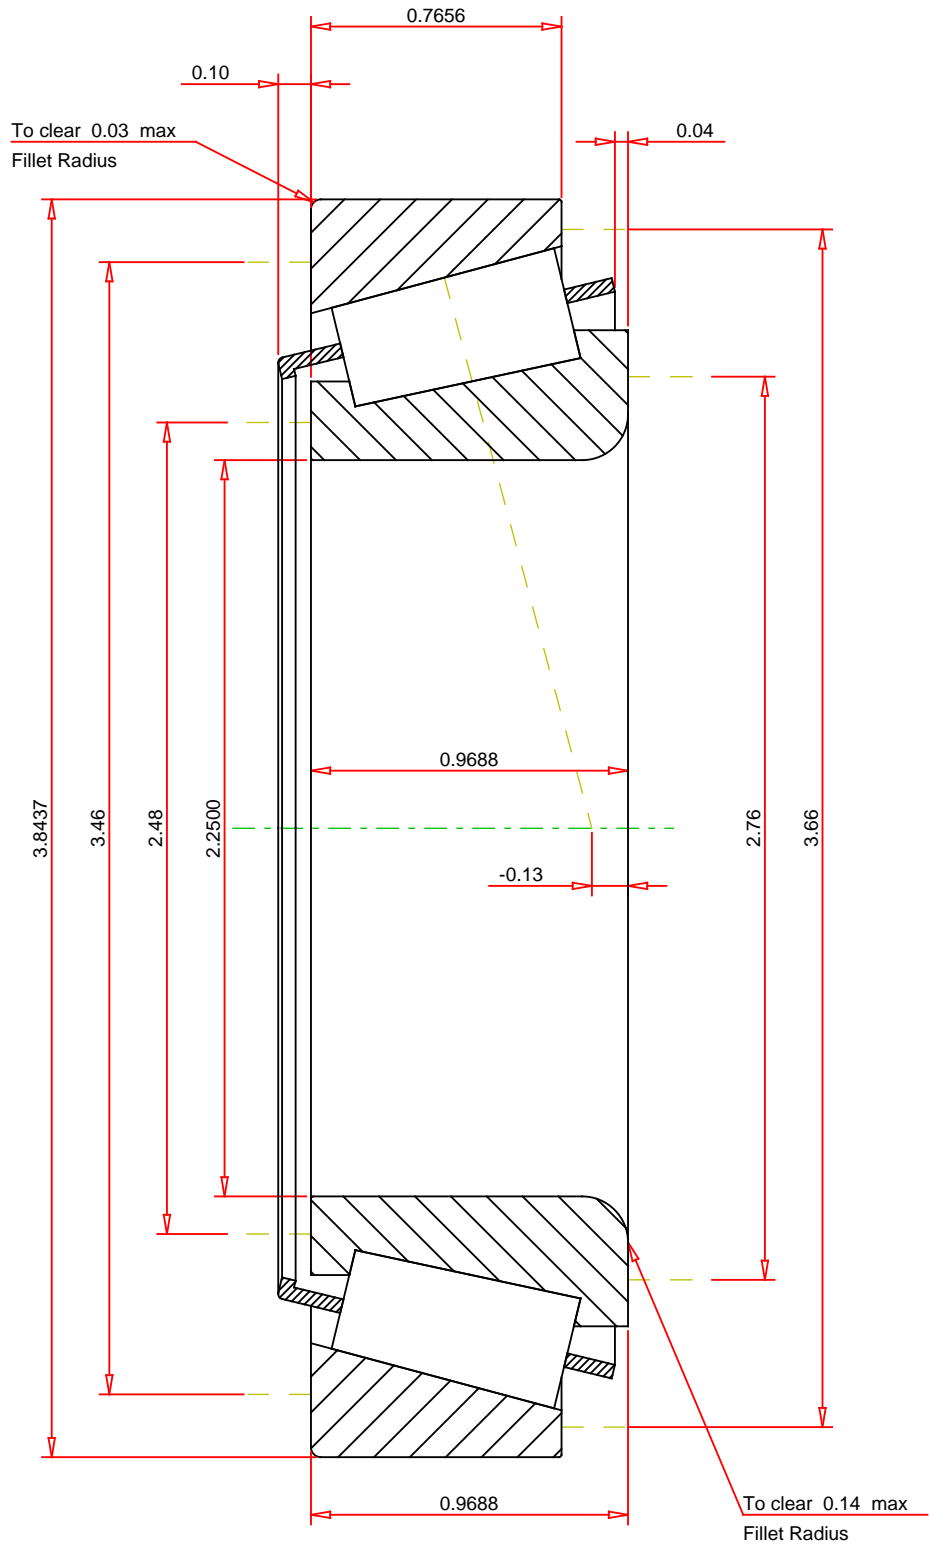

IMPERIAL UNITS

ISO Factor - e	0.4
ISO Factor - Y	1.49
Bearing Weight	1.6 lb
Number of Rollers Per Row	23
Effective Center Location	-0.13 inch

TIMKEN®

**28682 - 28622
TS BEARING ASSEMBLY**

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

K Factor	1.45
Dynamic Radial Rating - C90	32000 lbf
Dynamic Thrust Rating - Ca90	22000 lbf
Static Radial Rating - C0	142000 lbf
Dynamic Radial Rating - C1	123000 lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY