

# TIMKEN

The Timken Company  
 4500 Mt Pleasant St. NW  
 N. Canton, OH 44720  
 Phone: (234) 262-3000  
 E-Mail: [CustomerCAD@timken.com](mailto:CustomerCAD@timken.com) • Web site: [www.timken.com](http://www.timken.com)

## Timken Part Number 14118 - 14283, Tapered Roller Bearings - TS (Tapered Single) Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.



[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

### Specifications

<b>Series</b>	14000
<b>Cone Part Number</b>	14118
<b>Cup Part Number</b>	14283
<b>Design Units</b>	Imperial
<b>Bearing Weight</b>	0.400 Kg 1.00 lb
<b>Cage Type</b>	Stamped Steel

### Dimensions

<b>d - Bore</b>	30 mm 1.1811 in
<b>D - Cup Outer Diameter</b>	72.085 mm 2.8380 in

<b>B - Cone Width</b>	19.202 mm 0.7560 in
<b>C - Cup Width</b>	18.415 mm 0.7250 in
<b>T - Bearing Width</b>	22.385 mm 0.8813 in

#### Abutment and Fillet Dimensions

<b>R - Cone Backface "To Clear" Radius<sup>1</sup></b>	0.760 mm 0.03 in
<b>r - Cup Backface "To Clear" Radius<sup>2</sup></b>	2.29 mm 0.090 in
<b>da - Cone Frontface Backing Diameter</b>	36.58 mm 1.44 in
<b>db - Cone Backface Backing Diameter</b>	37.08 mm 1.46 in
<b>Da - Cup Frontface Backing Diameter</b>	66.00 mm 2.60 in
<b>Db - Cup Backface Backing Diameter</b>	59.94 mm 2.36 in
<b>Ab - Cage-Cone Frontface Clearance</b>	2.3 mm 0.09 in
<b>Aa - Cage-Cone Backface Clearance</b>	0.5 mm 0.02 in
<b>a - Effective Center Location<sup>3</sup></b>	-4.30 mm -0.17 in

#### Basic Load Ratings

<b>C90 - Dynamic Radial Rating (90 million revolutions)<sup>4</sup></b>	14200 N 3180 lbf
<b>C1 - Dynamic Radial Rating (1 million revolutions)<sup>5</sup></b>	54600 N 12300 lbf
<b>C0 - Static Radial Rating</b>	61700 N 13900 lbf
<b>C<sub>a90</sub> - Dynamic Thrust Rating (90 million revolutions)<sup>6</sup></b>	9260 N 2080 lbf

## Factors

<b>K - Factor<sup>7</sup></b>	1.53
<b>e - ISO Factor<sup>8</sup></b>	0.38
<b>Y - ISO Factor<sup>9</sup></b>	1.57
<b>G1 - Heat Generation Factor (Roller-Raceway)</b>	18
<b>G2 - Heat Generation Factor (Rib-Roller End)</b>	9.4
<b>Cg - Geometry Factor</b>	0.0668

<sup>1</sup> These maximum fillet radii will be cleared by the bearing corners.

<sup>2</sup> These maximum fillet radii will be cleared by the bearing corners.

<sup>3</sup> Negative value indicates effective center inside cone backface.

<sup>4</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values.


<sup>5</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.

<sup>6</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.

<sup>7</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>8</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>9</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

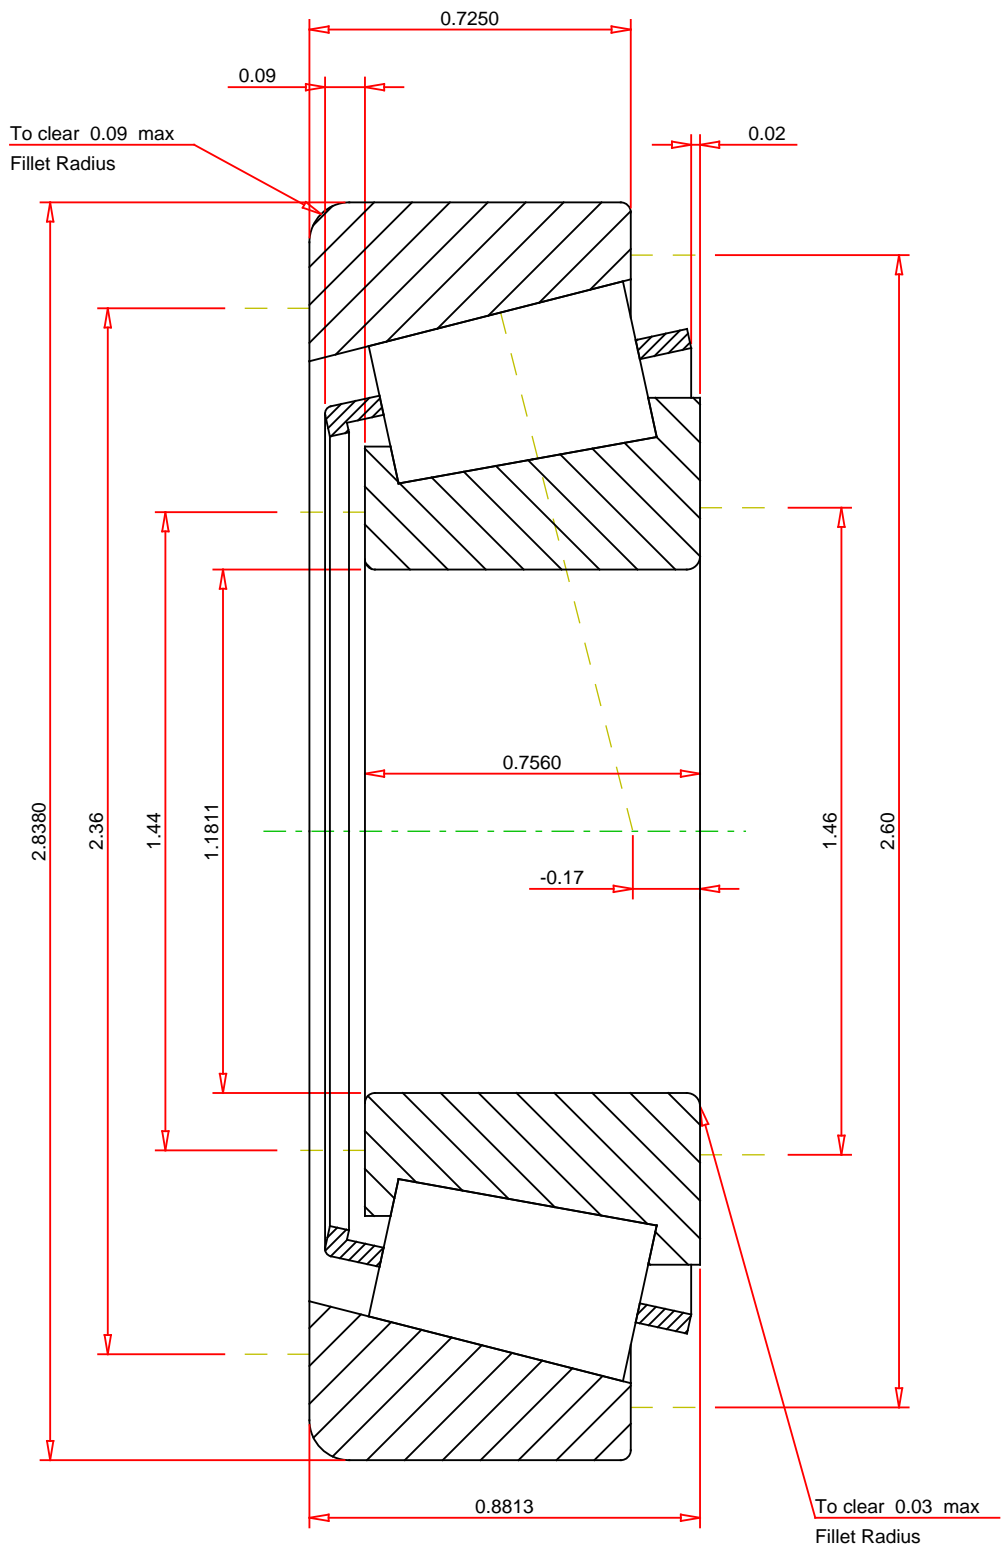

**IMPERIAL UNITS**

ISO Factor - e	0.38
ISO Factor - Y	1.57
Bearing Weight	1 lb
Number of Rollers Per Row	17
Effective Center Location	-0.17 inch



**14118 - 14283  
TS BEARING ASSEMBLY**

**THE TIMKEN COMPANY**  
NORTH CANTON, OHIO USA

K Factor	1.53
Dynamic Radial Rating - C90	14200 lbf
Dynamic Thrust Rating - Ca90	9260 lbf
Static Radial Rating - C0	61700 lbf
Dynamic Radial Rating - C1	54600 lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

**FOR DISCUSSION ONLY**