



## FGG.2B.303.CLAD92Z

### MECHANICAL DETAILS

**Shell Style Model** FG\* : Straight plug  
cable collet and nut for fitting a bend relief


**Keying** 1 key (alpha=0, plug: male contacts, receptacle: female contacts)

**Housing Material** Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces

**Cable Fixing** 8.3 - 9.2 mm

**Variant 2** Z : Nut for fitting a bend relief

	A	L	M	S1	S2
Mm.	15	50	38	13	12
In.	0.59	1.97	1.50	0.51	0.47



### PERFORMANCE DETAIL

**Insert** 2B.303 : 3 Low Voltage

**Insulator** L: PEEK

#### Specifications

**Contact Type:** Solder

**Max. Matings:** 5000


**Contact Dia.:** 1.6 mm (0.063in)

**Bucket Dia.:** 1.4 mm (0.055in)

**Max. Solid** 1 mm<sup>2</sup> (AWG 16)

**Max. Stranded** 1 mm<sup>2</sup> (AWG 18)

**R (max):** 3.5 mOhm

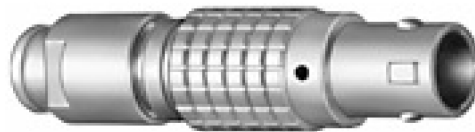

### OTHER CHARACTERISTICS

**Shell Style/Model** Libellé

**Temp (min)** -55°C

**Temp (max)** +250°C

**Humidity (max):** <=95% [at 60 deg C /140 F]

**Vibration:** 15 g [10 Hz - 2000 Hz]

**Shock Resistance:** 100 g [ 6 ms]

**Salt Spray** >144 hr

**Climatical** 50/175/21

**Shielding (min):** 75 dB (10 MHz)

**Shielding (min):** 40 dB (1 GHz)

**IP Rating** 50



### Available Download

[unipole\\_multipole.pdf](#)

### Related links

- [Contact](#)
- [Quote Request](#)
- [Catalogs Downloads](#)
- [Catalogs Requests](#)
- [Sample Request](#)
- [3D drawings](#)