


Models SR-W, SR-WM, SR-V and SR-VM

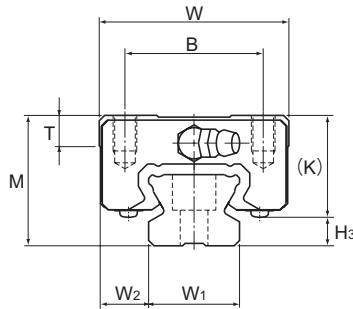

Model No.	Outer dimensions			LM block dimensions										H ₃
	Height	Width	Length	B	C	S×l	L ₁	T	K	N	E	Grease nipple		
	M	W	L											
SR 15W/WM SR 15V/VM	24	34	57 40.4	26	26	M4×7	39.5 22.9	5.7	19.5	6	5.5	PB1021B	4.5	
SR 20W/WM SR 20V/VM	28	42	66.2 47.3	32	32	M5×8	46.7 27.8	7.2	22	6	12	B-M6F	6	
SR 25WY/WMY SR 25VY/VMY	33	48	83 59.2	35	35	M6×9	59 35.2	7.7	26	7	12	B-M6F	7	
SR 30W/WM SR 30V/VM	42	60	96.8 67.9	40	40	M8×12	69.3 40.4	8.5	32.5	8	12	B-M6F	9.5	
SR 35W/WM SR 35V/VM	48	70	111 77.6	50	50	M8×12	79 45.7	12.5	36.5	8.5	12	B-M6F	11.5	
SR 45W	60	86	126	60	60	M10×15	90.5	15	47.5	11.5	16	B-PT1/8	12.5	
SR 55W	68	100	156	75	75	M12×20	117	16.7	54.5	12	16	B-PT1/8	13.5	
SR 70T	85	126	194.6	90	90	M16×25	147.6	24.5	70	12	16	B-PT1/8	15	
SR 85T	110	156	180	100	80	M18×30	130	25.5	91.5	27	12	A-PT1/8	18.5	
SR 100T	120	178	200	120	100	M20×35	150	29.5	101	32	12	A-PT1/8	19	
SR 120T	110	205	235	160	120	M20×35	180	24	95	14	13.5	B-PT1/4	15	
SR 150T	135	250	280	200	160	M20×35	215	24	113	17	13.5	B-PT1/4	22	


Model number coding

SR25 W 2 UU C0 M +1240L Y P T M -II


Model number	Type of LM block	Contamination protection accessory symbol (*1)	Stainless steel LM block	LM rail length (in mm)	Applied to only 25	Stainless steel LM rail	Symbol for No. of rails used on the same plane (*4)
	No. of LM blocks used on the same rail	Radial clearance symbol (*2) Normal (No symbol) Light preload (C1) Medium preload (C0)				Symbol for LM rail jointed use	
					Accuracy symbol (*3) Normal grade (No Symbol)/High accuracy grade (H) Precision grade (P)/Super precision grade (SP) Ultra precision grade (UP)		

(*1) See contamination protection accessory on A-368. (*2) See A-114. (*3) See A-119. (*4) See A-59.

Note) This model number indicates that a single-rail unit constitutes one set. (i.e., required number of sets when 2 rails are used in parallel is 2 at a minimum.)

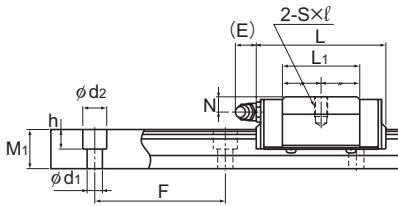

Model SR-V

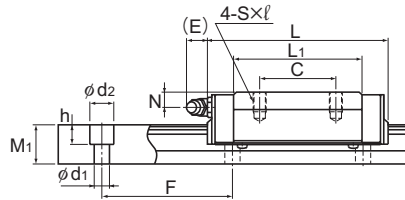

Model SR-W

Unit: mm

	LM rail dimensions					Basic load rating		Static permissible moment kN-m*					Mass		
	Width W_1 ± 0.05	Height M_1	Pitch F	Pitch F	Length* $d_1 \times d_2 \times h$	C kN	C_0 kN	M_A		M_B		M_C	LM block kg	LM rail kg/m	
								1 block	Double blocks	1 block	Double blocks	1 block			
	W_2	M_1	F	F	Max										
15	9.5	12.5	60	60	3.5×6×4.5	2500 (2500)	9.51 5.39	19.3 11.1	0.0925 0.0326	0.516 0.224	0.0567 0.0203	0.321 0.143	0.113 0.0654	0.2 0.12	1.2
20	11	15.5	60	60	6×9.5×8.5	4000 (3000)	12.5 7.16	25.2 14.4	0.146 0.053	0.778 0.332	0.0896 0.0329	0.481 0.21	0.194 0.11	0.3 0.2	2.1
23	12.5	18	60	60	7×11×9	4000 (3000)	20.3 11.7	39.5 22.5	0.286 0.103	1.52 0.649	0.175 0.0642	0.942 0.41	0.355 0.201	0.4 0.3	2.7
28	16	23	80	80	7×11×9	4000 (3000)	30 17.2	56.8 32.5	0.494 0.163	2.55 1.08	0.303 0.102	1.57 0.692	0.611 0.352	0.8 0.5	4.3
34	18	27.5	80	80	9×14×12	4000 (3000)	41.7 23.8	77.2 44.1	0.74 0.259	4.01 1.68	0.454 0.161	2.49 1.07	1.01 0.576	1.2 0.8	6.4
45	20.5	35.5	105	105	11×17.5×14	3500	55.3	101	1.1	5.96	0.679	3.69	1.77	2.2	11.3
48	26	38	120	120	14×20×17	3000	89.1	157	2.27	11.3	1.39	6.98	2.87	3.6	12.8
70	28	47	150	150	18×26×22	3000	156	266	2.54	13.2	2.18	11.3	4.14	7	22.8
85	35.5	65.5	180	180	18×26×22	3000	120	224	2.54	15.1	1.25	7.47	5.74	10.1	34.9
100	39	70.3	210	210	22×32×25	3000	148	283	3.95	20.9	1.95	10.3	8.55	14.1	46.4
114	45.5	65	230	230	26×39×30	3000	279	377	5.83	32.9	2.87	16.2	13.7	—	—
144	53	77	250	250	33×48×36	3000	411	537	9.98	55.8	4.92	27.5	24.3	—	—

Note1) Symbol M indicates that stainless steel is used in the LM block, LM rail and balls. Those models marked with this symbol are therefore highly resistant to corrosion and environment.

Those model numbers including and greater than SR85T are semi-standard models. If desiring these models, contact THK.

Models SR85T and SR100T are equipped with grease nipple on the side face of the LM block.

The maximum length under "Length*" indicates the standard maximum length of an LM rail. (See B-90.)

Static permissible moment*: 1 block: static permissible moment value with 1 LM block

Double blocks: static permissible moment value with 2 blocks closely contacting with each other

Note2) The LM rail mounting hole of SR15 is drilled for M3 screws as standard (without Y indication). If you order the hole to be drilled for M4 screws (with Y indication), contact THK. When replacing this model with model SSR, pay attention to the dimension of the rail mounting hole.