


Product Area	Kabeldose, Power M12 connectors A-Coding	serie 713	Pole Article number	4 99 0430 19 04
--------------	---	-----------	---------------------	--------------------


### Deratingkurven




### illustration

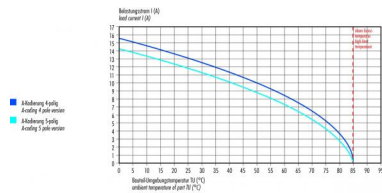

### scale drawing

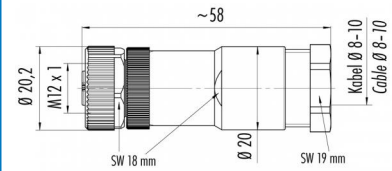

### Contact Arrangement



	X	Y
1	-2,50	0,00
2	0,00	2,50
3	2,50	0,00
4	0,00	-2,50

You can find the assembly instruction on the next page.

### Technical data

#### Common values

Connector Design	Female cable connector
Cable outlet	8 - 10 mm
Upper temperature	+85 °C
Lower temperature	-40 °C

#### Material

Material of contact	CuZn (brass)
Contact plating	CuSnZn (Optalloy)
Material of contact body	PA
Material of housing	PA

#### Electrical values

Rated voltage	250 V
Rated impulse voltage	2500 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40°C)	8 A
Volume resistivity	≤ 3 mΩ
Degree of protection	IP 67
Mechanical operation	>100 mating cycles

#### Cable data

Polzahl: 4, Kabeldurchlass: 8 - 10 mm, Kabeldose, Power



Product  
Area

Kabeldose, Power  
M12 connectors A-Coding

serie 713

Pole  
Article number

4  
99 0430 19 04

Installation instructions / Mounting cutout

