



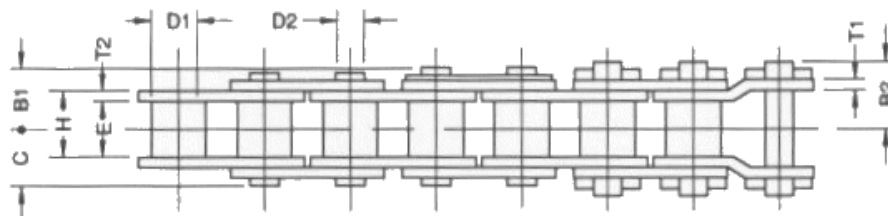

TYC B.S. STANDARD STAINLESS STEEL 304 CHAIN

British Standard - to DIN8187-1 (ISO 606)

06B-1, 08B-1, 10B-1, 12B-1 & 16B-1

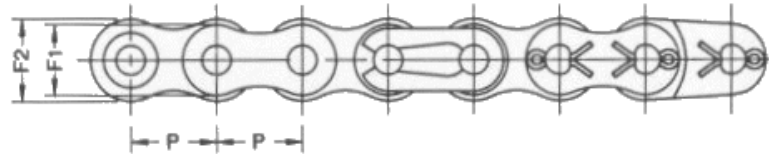


| TYC Type | Pitch | | Roller | | Pin | | | Links | | | | | Avg. Tensile Strength | Weight approx. | Conn. Links |
|----------|------------|---------------|--------|-------|-------|-------|------|-------|------|-------|-------|-------|-----------------------|----------------|-------------|
| | | | D1 | C | B1 | B2 | D2 | T1 | T2 | H | F1 | F2 | | | |
| | | | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | | | |
| Q06B-1SS | 3/8 x 7/32 | 9.525 x 5.72 | 6.35 | 6.43 | 7.39 | 8.14 | 3.28 | 1.28 | 1.28 | 8.53 | 8.26 | 8.26 | 700 | 0.41 | |
| Q08B-1SS | 1/2 x 5/16 | 12.7 x 7.75 | 8.51 | 8.17 | 9.17 | 10.57 | 4.45 | 1.49 | 1.49 | 11.30 | 10.92 | 11.80 | 1250 | 0.66 | A, B, D, |
| Q10B-1SS | 5/8 x 3/8 | 15.875 x 9.65 | 10.16 | 9.78 | 11.18 | 12.17 | 5.08 | 1.71 | 1.71 | 13.28 | 13.72 | 14.73 | 1650 | 0.92 | E, F, G |
| Q12B-1SS | 3/4 x 7/16 | 19.05 x 11.68 | 12.07 | 11.18 | 12.28 | 14.48 | 5.72 | 1.86 | 1.86 | 15.62 | 16.13 | 16.13 | 2100 | 1.21 | |
| Q16B-1SS | 1" x 0.67 | 25.4 x 17.02 | 15.88 | 17.82 | 20.79 | 21.69 | 8.28 | 3.18 | 3.99 | 25.45 | 21.08 | 21.08 | 5000 | 2.66 | |



Link Type A

Spring Clip




Link Type B

Cotter Pin



Link Type D

Rivet link




Link Type E

Double Crank Link



Link Type F

Roller link



Link Type G

Crank straight link