


# HARAX® Circular connector

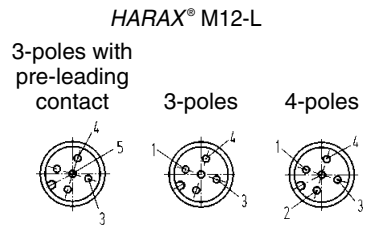

Circular Connectors

Identification	Part No.		Drawing	Dimensions in mm
	Male	Female		

**HARAX® M12-L, unshielded**


3 poles, A-coded, with pre-leading contact (assignment 3, 4, 5)  
 3 poles, A-coded (assignment 1, 3, 4)  
 4 poles, A-coded (assignment 1, 2, 3, 4)  
 4 poles, A-coded, to 2.6 mm core diameter (assignment 1, 2, 3, 4)

0.34 - 0.75 mm<sup>2</sup>  
 AWG 22 - 18

3-poles, A-coded (assignment 3, 4, 5)  
 3-poles, A-coded (assignment 1, 3, 4)  
 4-poles, A-coded (assignment 1, 2, 3, 4)  
 4-poles, A-coded, to 2.6 mm core diameter (assignment 1, 2, 3, 4)

0.34 - 0.75 mm<sup>2</sup>  
 AWG 22 - 18

21 03 212 1400	
21 03 212 1306	
<b>21 03 212 1305</b>	
21 03 212 1407	
	21 03 212 2400
	21 03 212 2306
	<b>21 03 212 2305</b>
	21 03 212 2407

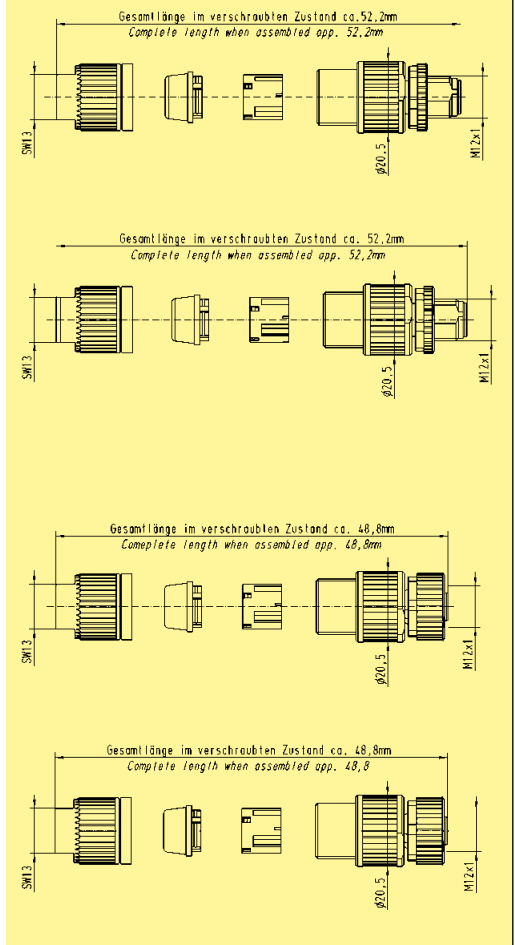

**HARAX® M12-L, unshielded**

5-poles, A-coded

0.34 - 0.5 mm<sup>2</sup>  
 AWG 22 - 20

Cable diameter: 6 - 8 mm


**HARAX® M12-XL, unshielded**

5-poles, A-coded

0.5 - 1 mm<sup>2</sup>  
 AWG 20 - 18

Cable diameter: 5.5 - 8.2 mm

<b>21 03 272 1505</b>	<b>21 03 272 2505</b>
<b>21 03 216 1505</b>	<b>21 03 216 2505</b>

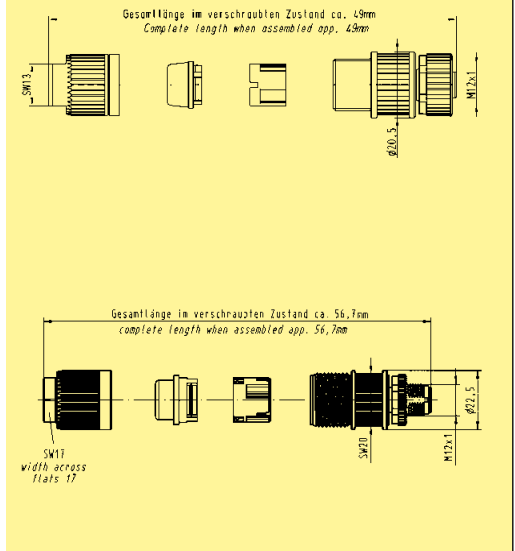

Stock items in bold type