

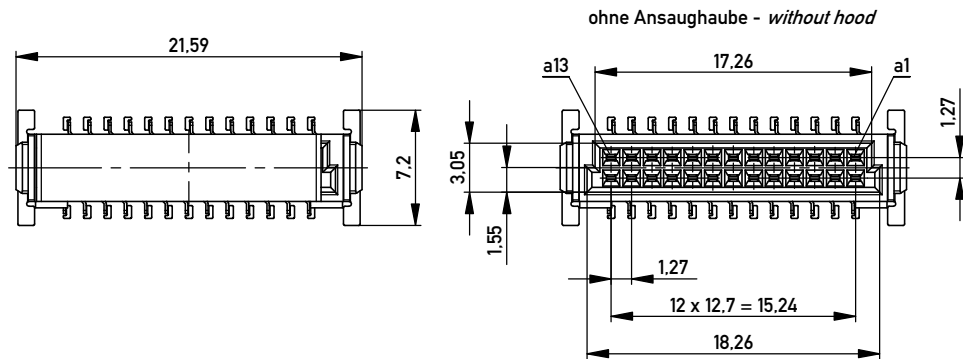



Verpackt im Gurt nach DIN IEC 60286-3
 Tape on Reel Packaging according to DIN IEC 60286-3
 Verpackungseinheit: 280 Stück
 Packaging unit: 280 pcs

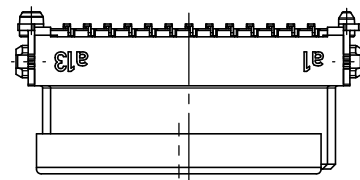


Abspulrichtung - Reel off Direction

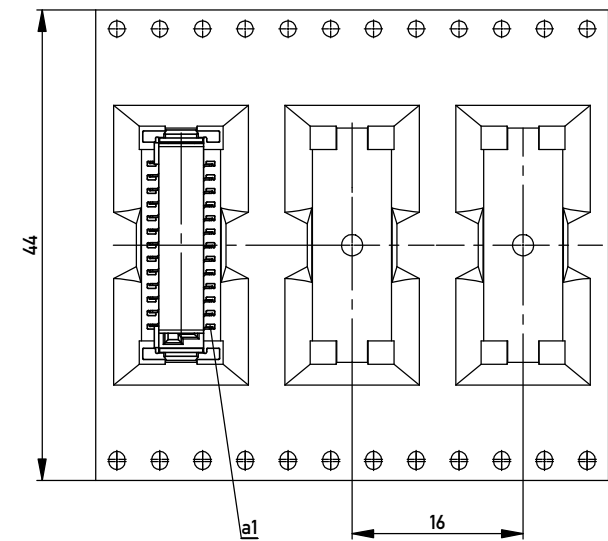

Anforderungsstufe 1
 Performance Level 1
 Kontaktbereich vergoldet
 Mating Area gold plating
 Anschlussbereich verzinkt 4-6 µm
 Terminal Area 4-6 µm tin plating
 Koplanarität der Anschlüsse ≤ 0.1 mm
 Coplanarity Area of Termination ≤ 0.1 mm

Leiterplatten-Layout Vorschlag für SMT
 PCB-Layout Proposal for SMT

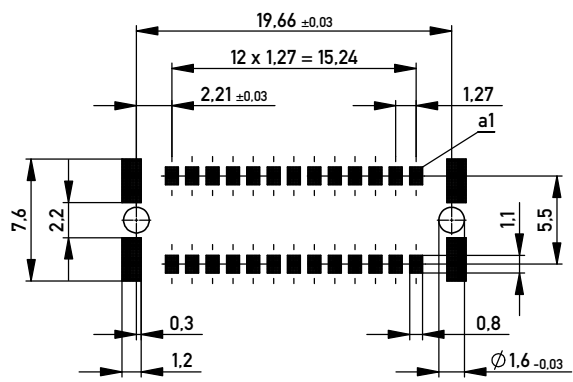

BA 7-03 - Standard Bauhöhe
 type 7-03 - standard assembly height

Information:		Tolerances	 All Dimensions in mm	Scale	3:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation Federl. SMC-B 26-SMD-BA7-03 <i>Female SMC-B 26-SMD-type7-03</i>	
 www.ERNI.com		154718		I A3	
f	09.12.2013	Date		Class	
Index		Date		SMCB	

Copyright by ERNI GmbH. Proprietary notice pursuant to ISO 16763 to be observed.