

Cable connector - SF-7ES1N8A8LDLS - 1618212


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Cable connector, SPEEDCON locking, M23, Number of positions: 4+3+PE, Type of contact: Socket, Crimp connection, shielded: yes, Cable diameter: 7.5 mm...18 mm



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 584517
Weight per Piece (excluding packing)	104.82 g
Custom tariff number	85366990
Country of origin	Germany
Note	Made to Order (non-returnable)

Technical data

General

Note	Order information Order crimp contacts 4 x Ø 1 mm, 4 x Ø 2 mm separately
Type of locking	SPEEDCON locking
Coding	N
Contact connection method	Crimp connection
Type of contacts	Socket
Number of positions	8
Contact diameter of power contacts	2 mm
Nominal current per power contact at 25°C	30 A
Contact diameter of signal contacts	1 mm
Conductor entry	7.5 mm ... 18 mm

Ambient conditions

Ambient temperature	-40 °C ... 125 °C
Degree of protection	IP67

Specifications according to DIN EN 61984:2001

Cable connector - SF-7ES1N8A8LDLS - 1618212

Technical data

Specifications according to DIN EN 61984:2001

Installation height max.	3000 m
Nominal / operating voltage of power contacts	630 V
Rated surge voltage of power contacts	6 kV
Overvoltage category of power contacts	III
Degree of pollution of power contacts	3
Nominal / operating voltage of signal contacts	250 V
Rated surge voltage of signal contacts	4 kV
Overvoltage category of signal contacts	III
Degree of pollution of signal contacts	3

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260708
eCl@ss 7.0	27440312
eCl@ss 8.0	27440102

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC001121
ETIM 5.0	EC002641

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized


Cable connector - SF-7ES1N8A8LDLS - 1618212

Approvals

Ex Approvals

Approvals submitted


Approval details

UL Recognized 	
mm ² /AWG/kcmil	4.0
Nominal current I _N	27 A
Nominal voltage U _N	600 V

cUL Recognized	
mm ² /AWG/kcmil	4.0
Nominal current I _N	18 A
Nominal voltage U _N	600 V


Drawings

Schematic diagram



Connector pin assignment

Dimensional drawing

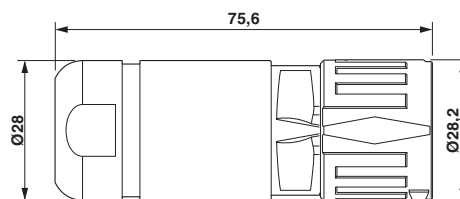

Dimensional drawing