

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [46562-3003](#)  
**Status:** **Active**  
**Overview:** EXTreme Ten60Power™ High-Current Connector  
**Description:** 2.54mm, 5.50mm Pitch EXTreme Ten60Power™ Vertical Receptacle Assembly with Guide Receivers, 24 Signal Circuits, 4 Power Circuits

**Documents:**

[3D Model](#) [Application Specification AS-46436-100 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-46436-100 \(PDF\)](#)

**Agency Certification**

CSA	LR19980
TUV	R72081037
UL	E29179

**General**

Product Family	PCB Receptacles
Series	<a href="#">46562</a>
Application	Board-to-Board, Power, Signal
Application Tooling Part Link	<a href="#">62100-7800</a>
Application Tooling Part Link	<a href="#">62100-7900</a>
Comments	See PS-46436-100 for details
Overview	<a href="#">EXTreme Ten60Power™ High-Current Connector</a>
Product Name	EXTreme Ten60Power™
UPC	883906924003

**Physical**

(p)ower-(s)ignal Configuration	2p - 24s - 4p
Circuits (Loaded)	28
Circuits (maximum)	28
Color - Resin	Black
Durability (mating cycles max)	200
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	No
Material - Metal	Copper
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	30.000/g
Number of Rows	1
Orientation	Vertical
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.58mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm, 5.50mm
Plating min - Mating	0.127µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	No

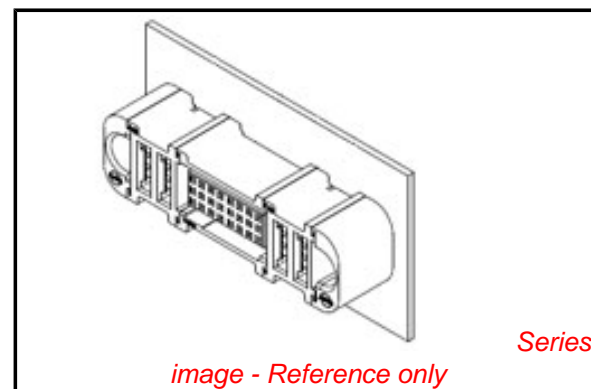


image - Reference only

**EU RoHS**

**ELV and RoHS Compliant**

**REACH SVHC**

Not Reviewed

**Low-Halogen Status**

Not Reviewed

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[46562Series](#)

**Mates With**

[46437-3003 EXTreme Ten60Power™ Right Angle Plug Assembly](#)

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
Removal Tool for Ten60 Power™ Receptacle Terminals	<a href="#">0621007900</a>
Removal Tool for Vertical Signal Modules	<a href="#">0621007800</a>

Temperature Range - Operating -40°C to +105°C  
Termination Interface: Style Through Hole - Compliant Pin

### **Electrical**

Current - Maximum per Contact 2.5A, 55A  
Grounding to PCB No  
Voltage - Maximum 600V AC / 250V DC

### **Material Info**

### **Reference - Drawing Numbers**

Application Specification AS-46436-100  
Product Specification PS-46436-100  
Sales Drawing SD-46562-303

This document was generated on 10/06/2014

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**