


Number of contacts

# 96, 64

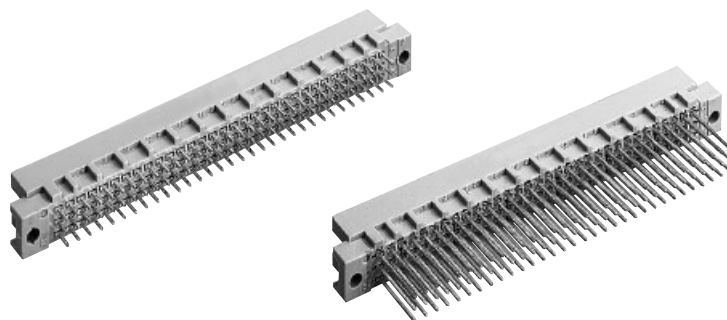

## Male connectors

DIN Signal up to 2 A

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to IEC 60603-2. Explanation chapter 00		
				3	2	1
Male connector with solder pins 2.5 mm  SMC	96		09 73 196 7902	09 73 196 6902 09 73 396 6902 <sup>b)</sup> 09 73 696 6902 <sup>c)</sup>	09 73 196 2902	
	96			09 73 196 6519 <sup>d)</sup>		
	64		09 73 164 7902	09 73 164 6902 09 73 364 6902 <sup>b)</sup>	09 73 164 2902 09 73 364 2902 <sup>b)</sup>	
Male connector with solder pins 4.0 mm  SMC	96		09 73 196 7903	09 73 196 6903 09 73 196 6903 222 <sup>f)</sup> 09 73 396 6903 <sup>b)</sup> 09 73 196 6953	09 73 196 2903	
	94 + 2 <sup>▲</sup>			09 73 196 6520 <sup>d)</sup>		
	96					
Male connector with solder pins 13 mm  SMC	96			09 73 196 6577	09 73 196 2577	
	96			09 73 196 6521 <sup>d)</sup>		
	64		09 73 164 7903	09 73 164 6903 09 73 364 6903 <sup>b)</sup>	09 73 164 2903	
Male connector with wrap posts <sup>1)</sup> 13 mm	96		09 73 196 7907	09 73 196 6907 09 73 696 6947 <sup>●c)</sup>	09 73 196 2907	
	64		09 73 164 7907	09 73 164 6907 09 73 164 6947 <sup>●</sup> 09 73 664 6947 <sup>●c)</sup>	09 73 164 2907	
Male connector with press-in pins 5.0 mm	96		09 73 196 7904	09 73 196 6904 09 73 696 6904 <sup>c)</sup> 09 73 196 6954	09 73 196 2904	
	94 + 2 <sup>▲</sup>					
Male connector with press-in pins 13 mm	96			09 73 196 6985 <sup>w)</sup> 09 73 196 6974 <sup>●</sup> 09 73 196 6995 <sup>w)</sup>	Performance level 1  on request	
	94 + 2 <sup>▲</sup>		09 73 196 7974 <sup>●</sup>			
	64		09 73 164 7904	09 73 164 6904  09 73 164 6985 <sup>w)</sup> 09 73 164 6974 <sup>●</sup>		

▲ Male connectors with 2 leading contacts [(0.8 mm) pos. a1 and a32]  
 ● Wrap posts for interfacing selectively gold plated (performance level 3)  
 f) Railway classification NFF 16-101, Smoke index: F1, Flammability class: I2  
 1) To be used only for wire wrap termination

b) Connectors with snap-in clips see chapter 00  
 c) Connectors with coding see chapter 00  
 d) CTI > 400  
 w) Wrap posts not for interfacing, no performance level