


## MIRO 6.2 pluggable compl. Module Optocoupler

IN: 24 VDC - OUT: 24 VDC / 6 A

Transistor 6 A  
24 V DC  
Spring clamp terminals

### [Link to Product](#)

#### Illustration

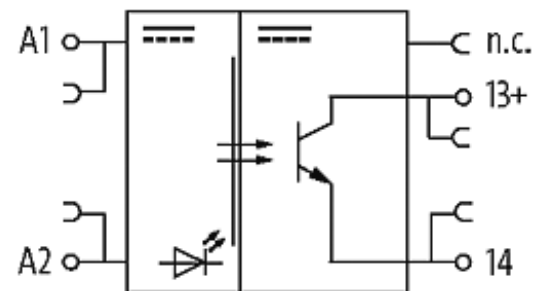

Product may differ from Image

#### Input

Connection voltage - current	24 V DC (18...30 VAC/DC) - 9 mA
LED display	LED (yellow)

#### General data

Test isolation voltage	50 V
Surge voltage resistance	2.5 kV
Protection	IP20
Mounting method	pluggable

Dimensions H x W x D	93x6.2x75.6 mm
----------------------	----------------

Temperature range	-25...+50 °C
-------------------	--------------

**Output**

Switching time ON/OFF	15/31 µs
-----------------------	----------

Switching voltage	3...30 V DC
-------------------	-------------

Switching current per output	10 mA...6 A
------------------------------	-------------

Saturation voltage (across output)	max. 240 mV
------------------------------------	-------------

Switching frequency	max. 500/50 Hz (ohm./ind.)
---------------------	----------------------------

**Commercial data**

country of origin	CZ
-------------------	----

customs tariff number	85365005
-----------------------	----------

minimum order quantity	1
------------------------	---