


FRONT VIEW



Pin#	Assignment
1	LL
2	UL
3	S
4	LR
5	UR

5 Pin 2.54mm Pitch Female Connector

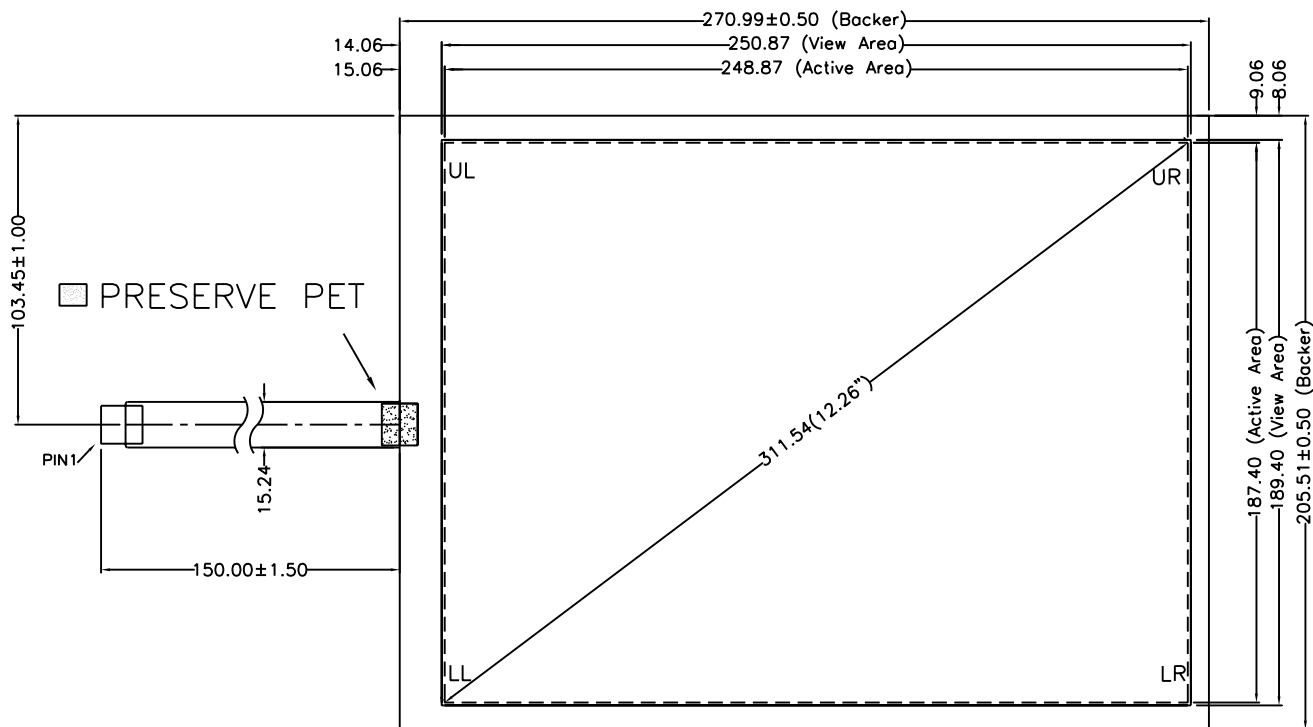

NOTES:

1. ITO GLASS THICKNESS : 1.80mm
2. OVERALL THICKNESS : 2.30±0.30mm
3. CONNECTOR AND PINOUT AS INDICATED
4. FRONT SURFACE : ANTI-GLARE HARDCOAT
5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C TIN PLATED CONTACTS
7. OTHER SPEC : SEE APPROVAL SHEET

REVISION			
NO.	DATE	DESCRIPTION	CHK
A	Mar.06,07	Pattern modified	Alex
CHIEF OF DESIGN		APPROVED	Alex
ENGINEER		PROJECT MANAGER	
DRAWN BY	William	DATE	Mar.06 , 2007
SHT 1 OF 1		REV.	D

Apex Material Technology Corp.

TOLERANCES UNLESS SPECIFIED	
.X	± 0.50
.XX	± 0.50
.XXX	± 0.30
ANGULAR	.

MODEL NAME : 2514
DWG NO : 2514-1-01
SCALE: 1:1 UNIT: mm

