



Type		Switch-disconnector-fuse switch bodies for use with NF C or DIN fuses Handle to be ordered separately (see previous page)			
Rated insulation voltage (Ui)		690 V			
Conventional thermal current (Ith)		32 A	50 A	63 A	100 A
Fuse size		10 x 38	14 x 51	Size 00C (1)	22 x 58
External front-mounted and RH side-mounted operator	3-pole	GS1DD3	GS2F3	GS2G3	GS2J3
	4-pole	GS1DD4 (2)	GS2F4	GS2G4	GS2J4
External LH side-mounted operator	3-pole	GS1DD3	GS2FG3	GS2GG3	GS2JG3
	4-pole	GS1DD4 (2)	GS2FG4	GS2GG4	GS2JG4
Direct RH side-mounted operator	3-pole	GS1DD3 (3)	GS1FD3	GS1GD3	GS1JD3
	4-pole	GS1DD4 (2) (3)	GS1FD4	GS1GD4	GS1JD4

(1) Compact fuse for German market



(2) 3-pole + switched neutral

(3) Direct front-mounted operator

Type		Switch-disconnector-fuse switch bodies for use with BS fuses Handle to be ordered separately (see previous page)			
Rated insulation voltage (Ui)		690 V			
Conventional thermal current (Ith)		32 A	32 A	63 A	100 A
Fuse size		A1	A1	A2-A3	A4 (Ø ≤ 31 mm)
External front-mounted and RH side-mounted operator	3-pole	GS1DDB3	GS2DB3	GS2GB3	GS2JB3
	4-pole	GS1DDB4 (2)	GS2DB4	GS2GB4	GS2JB4

(2) 3-pole + switched neutral

Accessories



Type		Auxiliary contacts Early break and/or O, I and Test signalling		O and I signalling	
Switch rating		32...1250 A		50...1250 A	
Number of contacts		1 NO	1 NC	1 NO + NC	2 NO + 2 NC
Operator	External front-mounted or RH side-mounted	GS1AM110	GS1AM101	GS1AN11	GS1AN22
	External LH side-mounted	GS1AM110	GS1AM101	GS1AN11G	GS1AN22G
	Direct RH side-mounted	—	—	GS1AN11	GS1AN22
	Direct front-mounted	—	—	—	—

Type		Auxiliary "blown fuse" signalling contacts for use with NF C and DIN fuses			
Number of contacts		1 NO/NC			
Switch rating		50 A	100 and 125 A	160 A	250 and 400 A
Fuse size		14 x 51	22 x 58	Size 0	Size 1 and Size 2
References	3-pole	GS1AF1	GS1AF23	GS1AF33	GS1AF43
	4-pole	GS1AF1	GS1AF24	GS1AF34	GS1AF44




Switch-disconnector-fuse switch bodies for use with NF C or DIN fuses
 Handle to be ordered separately (see previous page)

690 V							
125 A		160 A		250 A	400 A	630 A	1250 A
22 x 58	Size 00	Size 00	Size 0	Size 1	Size 2	Size 3	Size 4
GS2K3	GS2KK3	GS2LL3	GS2L3	GS2N3	GS2QQ3	GS2S3	GS2V3
GS2K4	GS2KK4	GS2LL4	GS2L4	GS2N4	GS2QQ4	GS2S4	GS2V4
GS2KG3	GS2KKG3	GS2LLG3	GS2LG3	GS2NG3	GS2QGG3	GS2SG3	GS2VG3
GS2KG4	GS2KKG4	GS2LLG4	GS2LG4	GS2NG4	GS2QGG4	GS2SG4	GS2VG4
GS1KD3	GS1KKD3	GS1LLD3	GS1LD3	GS1ND3	GS1QDD3	GS2S3 (3)	GS2V3 (3)
GS1KD4	GS1KKD4	GS1LLD4	GS1LD4	GS1ND4	GS1QDD4	GS2S4 (3)	GS2V4 (3)

Switch-disconnector-fuse switch bodies for use with BS fuses
 Handle to be ordered separately (see previous page)

690 V								
160 A		200 A	250 A	315 A	400 A	630 A	800 A	1250 A
A4	B1-B2	B1-B2	B1...B3	B1...B3	B1...B4	C1-C2	C1...C3	D1
GS2LLB3	GS2LB3	GS2MMB3	GS2NB3	GS2PPB3	GS2QQB3	GS2SB3	GS2TB3	GS2VB3
GS2LLB4	GS2LB4	GS2MMB4	GS2NB4	GS2PPB4	GS2QQB4	GS2SB4	GS2TB4	GS2VB4

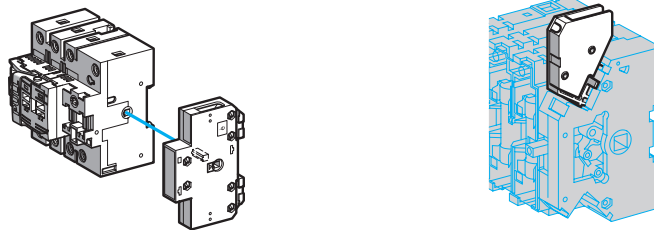


Auxiliary contacts
 O, I and Test signalling

Early break and O and I signalling

50...400 A		32 A		50...400 A	
1 NO + NC	2 NO + 2 NC	1 NO/NC	2 NO/NC	1 NO/NC	2 NO/NC
GS1ANT11	GS1ANT22	–	–	–	–
–	–	–	–	GS1AM1	GS1AM2
–	–	GS1AM111	GS1AM211	–	–

Auxiliary “blown fuse” signalling contacts for use with NF C and DIN fuses

		2 nd NO/NC
630 A	1250 A	50...1250 A
Size 3	Size 4	–
GS2AF63	GS2AF73	GS1AF
GS2AF64	GS2AF74	GS1AF

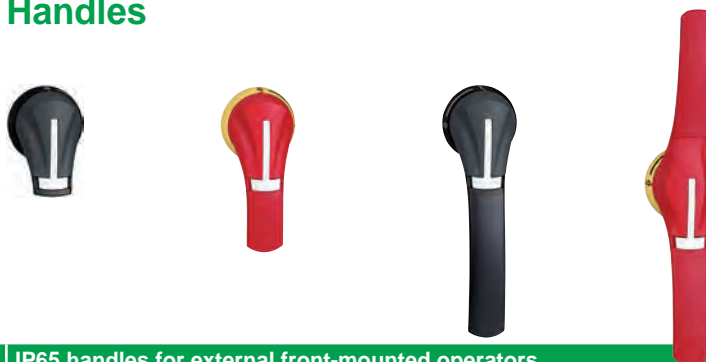

Type		IP65 handles for external front-mounted operators			
Switch rating		32...63 A	100...400 A	630...800 A	1250 A
References	Black/grey	GS2AH510 (1)	GS2AH530 (1)	GS2AH550	GS2AH570
	Red/yellow	GS2AH520 (1)	GS2AH540 (1)	GS2AH560	GS2AH580

(1) For external front operators with Test facility, insert the letter **T** in the reference. Example: GS2AH510 becomes GS2AHT510

Type		IP65 handles for external RH side-mounted operators (2)		
Switch rating		32...63 A	100...400 A	630...1250 A
References	Black/grey	GS2AH210	GS2AH230	GS2AH250
	Red/yellow	GS2AH220	GS2AH240	GS2AH260

(2) For external LH side-mounted operators, replace the number 2 in the reference by 3. Example: GS2AH210 becomes GS2AH310

Type		Shafts for external operators			
Switch rating		32 A	50...400 A	630...1250 A	
References	Length of shaft	200 mm	GS2AE82	GS2AE22	GS2AE52
		320 mm	GS2AE8	GS2AE2	GS2AE5
		400 mm	GS2AE81	GS2AE21	GS2AE51



Type		Handles for direct operators				
Switch rating		32 A	50 and 63 A	100...400 A	630 and 800 A	1250 A
Type of operator		Front	RH side	RH side	Front	Front
References		GS1AH103	GS1AH01	GS1AH02	GS2AH104	GS2AH105