



## Main

|                             |   |
|-----------------------------|---|
| Commercial Status           | Commercialised  |
| Range of product            | Harmony XAC   |
| Product or component type   | Pendant control station   |
| Control station name        | XACA  |
| Control station type        | Double insulated  |
| Enclosure material          | Polypropylene   |
| Electrical circuit type     | Control circuit   |
| Enclosure type              | Empty enclosure   |
| Number of cut-out           | 6 cut-outs  |
| Cable entry                 | Rubber sleeve with stepped entry, cable outer diameter: 8...26 mm |
| Guard rail                  | Without   |
| Cutout in base of enclosure | With  |

## Complementary


|                                  |                |
|----------------------------------|----------------|
| Control station colour           | Yellow         |
| Vertical operator cut-out centre | 30 mm          |
| Mechanical durability            | 1000000 cycles |
| Product weight                   | 0.665 kg       |

## Environment

|  |  |
|--|--|
| Standards                                  | EN/IEC 60204-32<br>EN/IEC 60947-5-1<br>UL 508<br>CSA C22.2 No 14 |
| Product certifications                     | CCC<br>CSA<br>GOST<br>UL   |
| Protective treatment                       | TH   |
| Ambient air temperature for operation      | -25...70 °C  |
| Ambient air temperature for storage        | -40...70 °C  |
| Vibration resistance                       | 15 gn (f = 10...500 Hz) conforming to IEC 60068-2-6              |
| Shock resistance                           | 100 gn conforming to IEC 60068-2-27                              |
| Class of protection against electric shock | Class II conforming to IEC 61140                                 |
| IP degree of protection                    | IP65 conforming to IEC 60529                                     |
| IK degree of protection                    | IK08 conforming to EN 50102                                      |

Dimensions

Below drawing shows a product with 6 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.

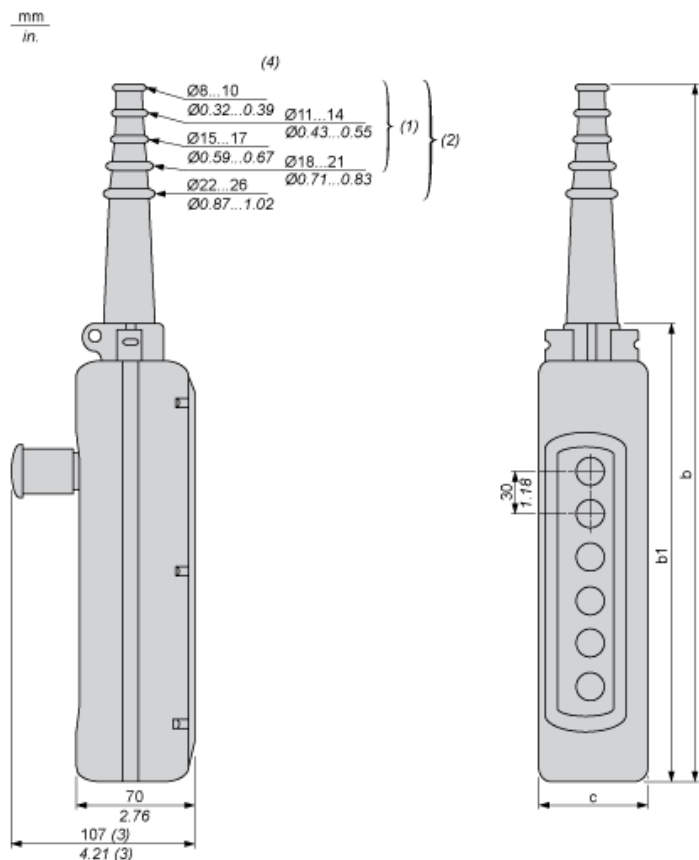

- (1) For 2 and 3-way XAC A stations.
- (2) For 4 to 8-way XAC A stations.
- (3) With trigger action Emergency stop head operator
- (4) Internal  $\varnothing$

Dimensions in mm

| Number of cut-outs | 2   | 3   | 4   | 5   | 6   | 8   | 12  |
|--------------------|-----|-----|-----|-----|-----|-----|-----|
| b                  | 314 | 314 | 440 | 440 | 500 | 560 | 680 |
| b1                 | 190 | 190 | 250 | 250 | 310 | 370 | 490 |
| c                  | 80  | 80  | 80  | 80  | 80  | 80  | 92  |

Dimensions in in.

| Number of cut-outs | 2     | 3     | 4     | 5     | 6     | 8     | 12    |
|--------------------|-------|-------|-------|-------|-------|-------|-------|
| b                  | 12.36 | 12.36 | 17.32 | 17.32 | 19.68 | 22.05 | 26.77 |
| b1                 | 7.48  | 7.48  | 9.84  | 9.84  | 12.20 | 14.57 | 19.29 |
| c                  | 3.15  | 3.15  | 3.15  | 3.15  | 3.15  | 3.15  | 3.62  |