
SPECIFICATIONS

Model Number: MR77B3 **Part Number**: 19028309A

rt Number: 19028309A Apr. 01, 2016



Mechanical Drawing:

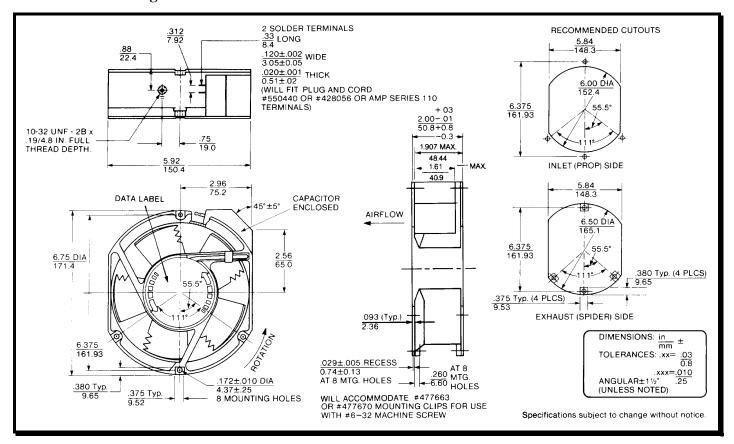

Motor:

 $\begin{array}{lll} \mbox{Nominal Voltage} & = 220 \, / \, 230 \mbox{ VAC} \\ \mbox{Frequency} & = 50 \, / \, 60 \mbox{ Hz} \\ \mbox{Nominal Running Current} & = 0.13 \, / \, 0.14 \mbox{ Amps} \\ \mbox{Max. Locked Rotor Current} & = 0.25 \mbox{ Amps} \\ \mbox{Running Power} & = 26 \, / \, 30 \mbox{ Watts} \\ \mbox{Average Speed} & = 2850 \, / \, 3350 \mbox{ RPM} \end{array}$

Bearings = Ball

Air Flow = 200 / 235 CFMAcoustic = 52.2 / 55.8 dBA

Construction:

Venturi: Single Piece Die-Cast Aluminum, Black.

Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 51,000 hours at 40°C.

Additional Features:

Permanent Split Capacitor Motor

Thermal Protection Automatic Restart

Operating Temperature: -10°C to 70°C Storage Temperature: -40°C to 85°C

Termination:

0.110" Terminals

Agency Approvals:

UL, CE