


Bobbin
FS-2ETD-4916-10

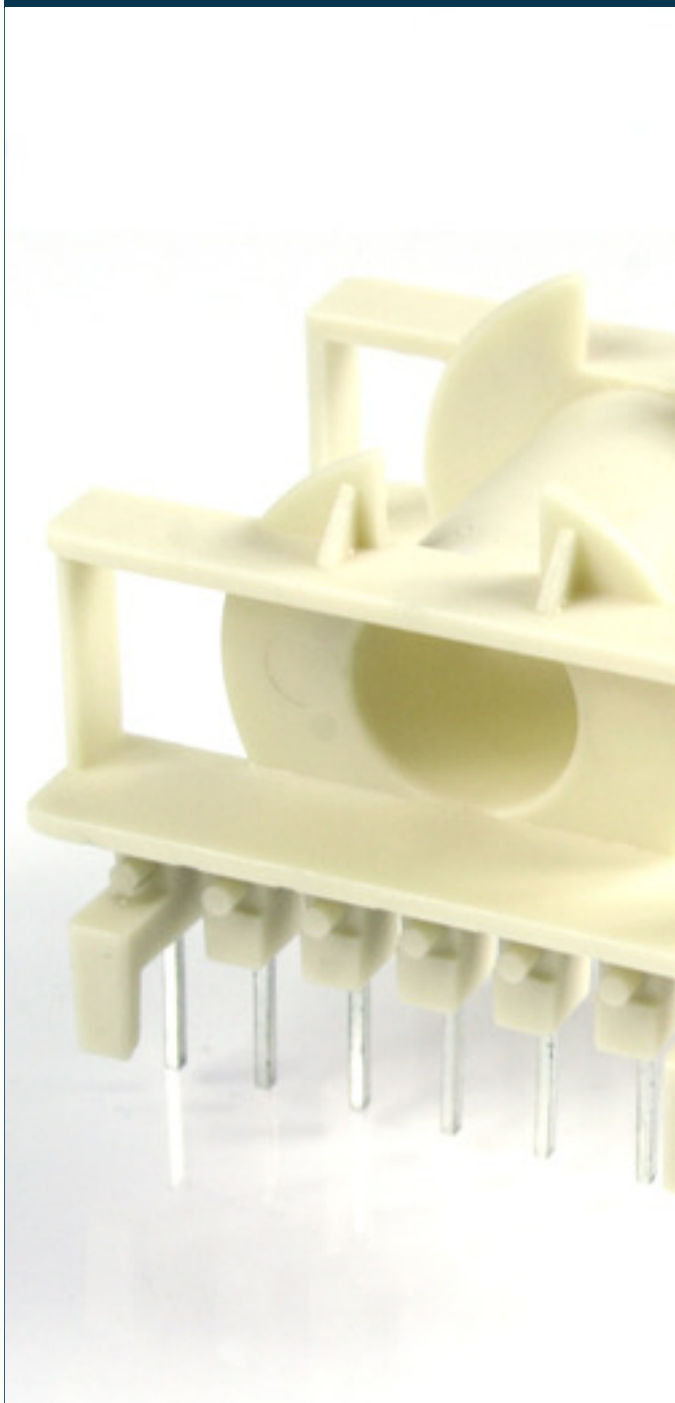

Advantages


Cost saving and easy compilation of components for pattern construction through unification

On request, wound inductors to EN61558-2-16 and EN60950 or vacuum potted

Applications

Transformers and reactors in switch mode power supplies

Approvals



Bobbin

FS-2ETD-4916-10

Electrical data	
Type	FS-2ETD-4916-10
General data	
for core	FS-2ETD-4916-00
Environment	
	B
Notes	
	ISO 2768-m

Mechanical data	
Type	FS-2ETD-4916-10
Terminal and mounting	No
Measures and weights	
	vertical
Winding width	32.8 mm
Winding height	8.2 mm
	1
	4.5
	30.48
	5.08
	20

Subjects to change.