

## Plugs




- **Material**  
Glass-fibre reinforced polyamide based (PA) technopolymer. Resistant to solvents, oils, greases and other chemical agents.
- **Colour**  
Black, matte finish.
- **Packing ring**  
NBR synthetic rubber.
- **Maximum continuous working temperature**  
100°C.

### Technical data

The tightening torque indicated in the table guarantees an optimal tightness, keeping the packing ring in the correct position.

### Accessories on request

TNR. plugs are suitable for mounting aluminium plates with graphic symbols type MH..

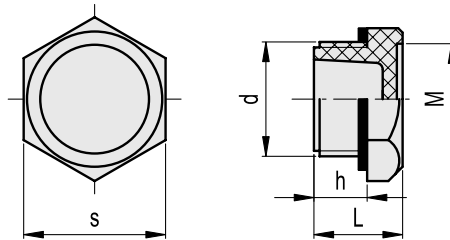

Code	Description	d	h	s	L	M	Tightening torque [Nm]	⚖️
58284	TN.10x1.5	M10x1.5	9	19	16	15	4÷5	4
58285	TN.12x1.5	M12x1.5	9	19	16	15	6÷8	4
58286	TN.14x1.5	M14x1.5	9	19	16	15	6÷8	5
58287	TN.16x1.5	M16x1.5	9	22	16	17	8÷10	7
58288	TN.18x1.5	M18x1.5	11	26	18	20.5	8÷10	8
58289	TN.20x1.5	M20x1.5	11	26	18	20.5	8÷10	8
58290	TN.22x1.5	M22x1.5	12	32	20	25	10÷12	12
58291	TN.25x1.5	M25x1.5	12	32	20	25	10÷12	12
58292	TN.26x1.5	M26x1.5	12	32	20	25	10÷12	14
58293	TN.35x1.5	M35x1.5	13	38	22	31	15÷18	15
58401	TN.40x1.5	M40x1.5	14	46	24	38	15÷18	20
58294	TN.1/8	G 1/8	9	19	16	15	4÷6	4
58295	TN.1/4	G 1/4	9	19	16	15	4÷6	4
58296	TN.3/8	G 3/8	9	22	16	17	8÷10	5
58297	TN.1/2	G 1/2	11	26	18	20.5	8÷10	8
58298	TN.3/4	G 3/4	12	32	20	25	10÷12	14
58299	TN.1	G 1	13	38	22	31	12÷15	18
58411	TN.1¼	G1 1/4	14	46	24	38	15÷18	20
58413	TN.1½	G1 1/2	15	55	26	46	15÷18	24

