

CRIMPING PLIERS

97 00 Crimp Grip Pliers




97 00 215 A




- for solder-free electrical connections
- quick release lever
- high contact pressure with minimum handforce using toggle lever transmission
- reproducible crimping quality with high tensile strength because of zero point lock
- adjustable crimping pressure
- Special steel, high-strength

Article No.	EAN 4003773-	↔ mm			Pliers	Applications	Capacity mm ²	AWG	⚖ g
97 00 215 A	006497	215			burnished	insulated terminals and plug connectors	0.5 - 6	20 - 10	520

97 2 Crimping Pliers

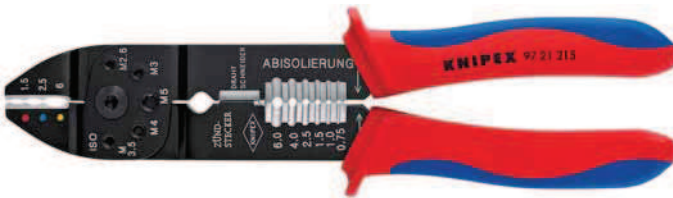



97 21 215

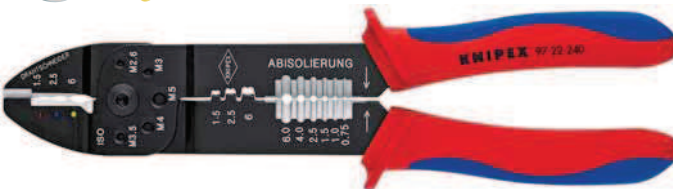

97 22 240



- for cutting cables, stripping wire and crimping insulated and non-insulated terminals, connectors and plug type connectors
- with threaded holes for cutting copper and brass screws threaded M 2.6 / M 3 / M 3.5 / M 4 and M 5
- bolted joint for higher stability and even movement
- Special steel, high-strength



Article No.	EAN 4003773-	↔ mm			Pliers	Handles	Applications	Capacity mm ²	AWG	⚖ g
97 21 215	019688	230			burnished	with multi-component grips	insulated terminals and plug connectors	0.75 - 6	18 - 10	224
97 21 215 B	019695	230			burnished	with multi-component grips	non-insulated open plug-type connectors (plug width 6.3 mm)	0.5 - 2.5	20 - 13	290
97 21 215 C	019701	230			burnished	with multi-component grips	non-insulated terminals and plug connectors	0.5 - 6	20 - 10	222
97 22 240	070726	240			black lacquered	with multi-component grips	insulated terminals and plug connectors	0.75 - 6	18 - 10	300
							non-insulated open plug-type connectors (plug width 6.3 mm)	0.5 - 6	20 - 10	

CRIMPING PLIERS




97 32 Crimping Pliers



97 32 225



- for cutting cables, stripping wire and crimping insulated and non-insulated terminals and connectors
- with threaded holes for cutting copper and brass screws threaded M 2.6 / M 3 / M 3.5 / M 4 and M 5
- Special steel, high-strength


Article No.	EAN 4003773-	↔ mm		Pliers	Handles	Applications	Capacity mm ²	AWG	△ g
97 32 225	019718	225	  	burnished	with plastic grips	insulated terminals and plug connectors	0.5 - 6	20 - 10	240
						non-insulated terminals and plug connectors	0.5 - 2.5	20 - 13	

97 40 Insertion tool for LSA-Plus and identical




97 40 10

- tool for putting on boards, sockets and fields
- pushing down and cutting in one operation
- for UTP and STP cables, conductor 0.4 - 0.8 mm dia.
- with integrated pulling hook and release blade
- housing: plastic, impact-proof

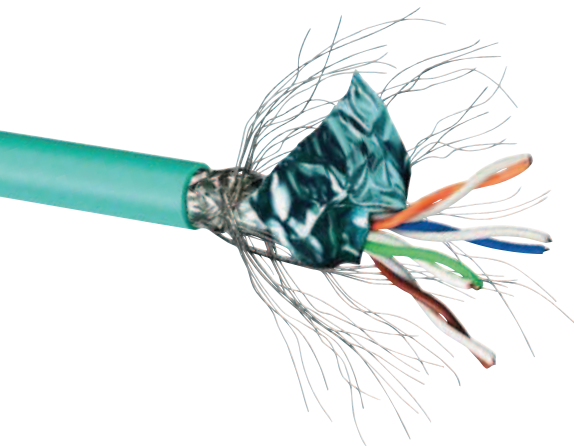

Putting down and cutting the cable in one operation




With integrated pulling hook

Article No.	EAN 4003773-	↔ mm	Head	Applications	Capacity Ø mm	△ g
97 40 10	044895	175	burnished	UTP- and STP-cables, LSA-Plus and identical	0.4 - 0.8	100

97
33

KNIPEX MultiCrimp®

Crimping Pliers with changer magazine

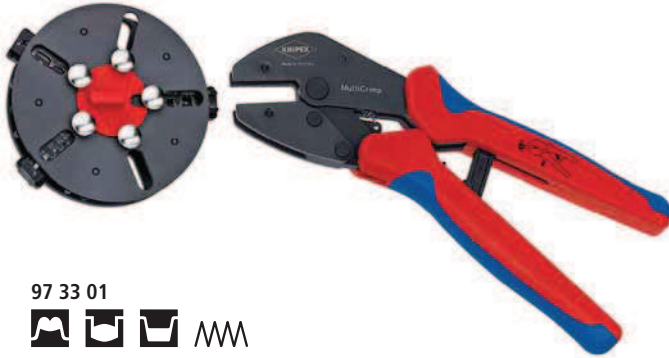

97 33 01



97 33 01

Crimping pliers with round magazine and three interchangeable crimping die sets for non-insulated open plug type connectors (plug width 4.8 + 6.3 mm) from 0.5 - 6 mm²; for insulated terminals, plug connectors and butt connectors from 0.5 - 6 mm² and for insulated and non-insulated end sleeves (ferrules) from 0.25 - 6 mm²

Now also for insulated and non-insulated end sleeves (ferrules) 10 / 16 / 25 mm²

Universal indent crimping die for non-insulated connectors



97 33 02



97 33 02

Crimping pliers with round magazine and five interchangeable crimping dies for non-insulated open plug type connectors (plug width 4.8 + 6.3 mm) from 0.5 - 6 mm²; for insulated terminals, plug connectors and butt connectors from 0.5 - 6 mm²; for insulated and non-insulated end sleeves (ferrules) from 0.25 - 6 mm²; for insulated and non-insulated end sleeves (ferrules) with 10 / 16 / 25 mm² and for non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267

Available from 01.09.2014



Compact, inexpensive and light-weight crimping pliers for fitting and repairs. The electrician needs only one tool now instead of five as before.

- just one tool for the most common crimping applications
- crimping dies changed quickly and easily without any additional tool
- sorted and protected storage of the interchangeable dies in a round magazine
- comfortable, powerful crimping pliers in professional quality
- same reliable crimping results as with fixed crimping dies
- repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- Chrome vanadium electric steel in special quality, oil-hardened
- round magazine: plastic, fibreglass-reinforced



Changing position: service lever opens out for parallel jaw positioning



Changing the crimping dies: unlock the magazine position, take out the set of dies which the pliers have been pushed on



Fold in the service lever and press the pliers – ready for use again

CRIMPING PLIERS



Magazine for crimping dies can be carried on a belt

Clearly visible marking on the crimping dies with pictograms

Article No.	EAN 4003773-	↔ mm			Applications	Capacity mm ²	AWG	△ g	
97 33 01	066927	250			non-insulated open plug type connectors (plug width 4.8 + 6.3 mm)	0.5 - 1 1.5 - 2.5 4 - 6	20 - 10	770	
									insulated terminals, plug connectors and butt connectors
									insulated and non-insulated end sleeves (ferrules)
97 33 02	066934	250			non-insulated open plug type connectors (plug width 4.8 + 6.3 mm)	0.5 - 1 1.5 - 2.5 4 - 6	20 - 10	870	
									insulated terminals, plug connectors and butt connectors
									insulated and non-insulated end sleeves (ferrules)
									insulated and non-insulated end sleeves (ferrules)
									non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267

97 39 05	070078	Crimping dies, for non-insulated open plug type connectors (plug width 4.8 + 6.3 mm)	
97 39 06	070085	Crimping dies, for insulated terminals, plug connectors and butt connectors	
97 39 08	070092	Crimping dies, for insulated and non-insulated end sleeves (ferrules)	
97 39 09	077763	Crimping dies, for insulated and non-insulated end sleeves (ferrules)	
97 39 13	070108	Crimping dies, for non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267	
97 39 13 A	077770		
97 39 30	070115	Crimping dies, for compression joints according to DIN 46267	
97 39 90	070061	Changer Magazine, empty	

97
43

Crimp System Pliers

for exchangeable crimping dies

PATENTED



With the possibility of crimping almost all currently available crimping connections with just one tool and state-of-the-art crimping pliers technology, the crimp system pliers solves almost all tasks in mobile and stationary crimping technology and is an excellent tool for professionals to use for standard crimping.



97 43 200
MM



97 43 200 A
MM

- just one tool for almost 1,000 crimping applications
- almost parallel crimping die movement
- repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- optimum transmission of force due to lever action for fatigue-reduced operation
- ergonomically designed handles
- different locators for precise positioning of the connectors
- crimping dies for applications not covered in the range offered here, may be available on request
- Chrome vanadium electric steel in special quality, oil-hardened

97 43 05

with attached crimping dies for non-insulated open plug-type connectors (4.8 and 6.3 mm connector width)

97 43 06

with attached crimping dies for insulated terminals and plug connectors

97 43 200

comes in a plastic case; foam insert with recesses for crimping dies and locators; with service tool (Allen key), screws and nuts; without crimping dies

97 43 200 A

pliers without crimping dies, without case



97 43 200 with crimping dies 97 49 06 for insulated terminals, plug connectors and butt connectors



97 43 200 with crimping dies 97 49 09 for insulated and non-insulated end sleeves (ferrules)



97 43 400 with crimping dies 97 49 24 and locator 97 49 93 for D-Sub plugs

Article No.	EAN 4003773-	↔ mm		Pliers	Handles	Applications	Capacity mm ²	AWG	g
97 43 200	030812	200	MM	burnished	with multi-component grips	see crimping dies table			988
97 43 200 A	071587	200	MM	burnished	with multi-component grips	see crimping dies table			574
97 43 05	031031	200	MM	burnished	with multi-component grips	Crimp System Pliers for non-insulated open plug-type connectors (4.8 and 6.3 mm connector width)	0.5 - 6	20 - 10	618
97 43 06	031048	200	MM	burnished	with multi-component grips	Crimp System Pliers for insulated terminals plug connectors and butt connectors	0.5 - 6	20 - 10	610

97
43

KNIPEX eCrimp

Electromechanical Crimp System Pliers
for exchangeable crimping dies



97 43 E

- 97 43 E
with euro plug
- 97 43 E AUS
with plug adapter for AS/NSZ 3112 (AUS+NZ)
- 97 43 E UK
with plug adapter for BS 5733 (GB)
- 97 43 E US
with plug NEMA 1-15P (USA / Canada / Mexico)



The KNIPEX eCrimp is the first electromechanically actuated model of crimping pliers in the world. The possible use of **over 40 KNIPEX crimping dies and locators as well as more than 1,000 special crimping dies** from the proven Crimp System Pliers (97 43 200). Its universal application range makes it an essential tool in the workshop and for rough field work.

- strong electromechanical drive, no hydraulic components, no leakages
- max. pressing force of the jaws approx. 11 kN
- ergonomically optimised, user-friendly working height during workshop operation
- LED working light for targeted illumination of the crimping area
- low noise level
- Long servicing intervals (up to 25,000 crimping actions)!
The KNIPEX eCrimp is designed to only require servicing after 25,000 crimping actions. This means the intervals between servicing the electromechanical crimping pliers is 2.5 : 1 in relation to conventionally actuated crimping pliers. The pliers are therefore available for crimping use for considerably longer. They do not need to be sent away frequently for servicing. High availability without downtimes while being serviced.
- powerful li-ion rechargeable battery (12 V; 1.5 Ah; 18 Wh); charge time approx. 30 min; no memory effect
- approx. 170 operating cycles for plug-in connectors with 10 mm² nominal size with a single battery charge
- safety loop to prevent falling during field work



































Article No.	EAN	Mains voltage/ frequency	Connector socket	△ g
97 43 E	076858	230 V / 50 Hz	CEE 7/16	1960
97 43 E UK	076865	230 V / 50 Hz	BS 5733	1960
97 43 E AUS	076872	230 V / 50 Hz	AS/NSZ 3112	1960
97 43 E US	077008	120 V / 60 Hz	NEMA 1-15P	1960



















































97 43 E 01	076889	Spare Storage Battery for KNIPEX eCrimp		
------------	--------	---	--	--



Crimping Dies for Crimp System Pliers for different applications (1,000 special crimping dies upon request)









Article No.	EAN 4003773-			Applications	Capacity mm ²	AWG	Capacity SW mm	Sleeves Ø mm
97 49 04	030850			non-insulated open plug type connectors (plug width 2.8 + 4.8 mm)	plug width 2.8 mm: 0.1 - 0.25 plug width 2.8 mm: 0.5 - 1 plug width 4.8 mm: 0.5 - 1 plug width 4.8 mm: 1.5 - 2.5	27 - 13		
97 49 05	030867			non-insulated open plug type connectors (plug width 4.8 + 6.3 mm)	0.5 - 1 1.5 - 2.5 4 - 6	20 - 10		
97 49 06	030836			insulated terminals, plug connectors and butt connectors	0.5 - 1 1.5 - 2.5 4 - 6	20 - 10		
97 49 07	077749			heat shrinkable sleeve connectors	0.5 - 1 1.5 - 2.5 4 - 6			
97 49 08	030874			insulated and non-insulated end sleeves (ferrules)	0.25 - 0.75 1 - 1.5 2.5 4 6	23 - 10		
97 49 09	030881				10 / 16 / 25	7 / 5 / 3		
97 49 10	076896			non-insulated tubular cable lugs and crimp terminals in accordance with DIN 46237 and non-insulated butt and crimp connectors in accordance with DIN 46341	0.5 - 0.75	13 15 - 17 19 - 20		
97 49 11	076902			non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267		7 / 10 / 11		
97 49 13	030843			non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267	0.5 - 1 1.5 - 2.5 4 - 6 10	20 - 7		
97 49 14	077756			non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267	0.5 - 1 1.5 - 2.5 4 - 6 10			
97 49 15	043164			plug connectors (plug width 6.3 mm) and non-insulated open plug type connectors (plug width 4.8 mm)	plug width 6.3 mm: 1 - 2.5 plug width 4.8 mm: 1 - 2.5 plug width 4.8 mm: 3 - 6	17 - 13 12 - 9		
97 49 16	040675			insulated terminals + plug connectors	10 16	7 / 5		
97 49 18	063186			twin end sleeves	2 x 6 / 10 / 16	10 / 7 / 5		
97 49 19	030898			insulated and non-insulated end sleeves (ferrules)	35 / 50	2 / 0		
97 49 20	045069			F-connectors for TV and satellite connections			7.0 / 8.4 / 8.1	7.7 / 9.5 / 9.5

CRIMPING PLIERS

Article No.	EAN 4003773-			Applications	Capacity mm ²	AWG	Capacity SW mm	Sleeves Ø mm
97 49 23	052135			non-insulated terminals + plug connectors	16 + 25	5 + 3		
97 49 24	030911			D-Sub; HD 20; HDE plugs	0.03 - 0.09 0.2 - 0.56 0.08 - 0.2	32 - 20		
97 49 30	030904			compression joints according to DIN 46267	1.5 - 4.0	15 - 11		
97 49 35	034315			spark plug connectors and distributors (snap-on sleeves, saw tooth couplings, threaded sleeves, ignition cable sleeves and ignition distributor couplings)	1	17		
97 49 40	030959			Coax connectors RG 58, 59, 62, 71, 223			5.4 / 6.48 / 1.72	6.4 / 7.6 / 2.1
97 49 44	041443			rolled contacts	0.14 - 0.25 0.3 - 0.5 0.75 - 1.5	26 - 15		
97 49 50	030966			Coax connectors/Car phone RG 58, 174, 188, 316			3.25 / 4.52 / 5.4 / 1.72 / 1.07 / 0.72	3.9 / 5.4 / 6.4 / 2.1 / 1.3 / 0.95
97 49 54	041450			modular plugs	0.5 - 1 0.5 - 1 1.5 - 2.5 1.5 - 2.5	20 - 13		
97 49 59	073734			solar cable connectors Helios H4 (Amphenol)	2.5 + 4 + 6	13 - 10		
97 49 60	030928			turned contacts (HTS + Harting)	0.14 - 4	26 - 11		
97 49 61	045137			turned contacts		10/11/13/15		
97 49 62	063179			solar cable connectors (Huber + Suhner)	2.5 + 4	13 + 11		
97 49 63	066675			solar cable connectors (Huber + Suhner)	4 + 6	11 + 10		
97 49 64	044055			ABS connectors in motor vehicles	1 - 6	17 - 10		
97 49 65	066682			solar cable connectors MC3 (Multi-Contact)	2.5 - 6	13 - 10		
97 49 66	066699			solar cable connectors MC4 (Multi-Contact)	2.5 - 6	13 - 10		
97 49 66 4	072096			solar cable connectors MC4 (Multi-Contact) cutting - stripping - crimping	4	11		
97 49 66 6	072102				6	10		
97 49 67	066705			solar cable connectors (Hirschmann)	2.5 - 6	13 - 10		
97 49 68	066712			solar cable connectors (Tyco)	1.5 - 6	15 - 10		
97 49 69 1	072119			solar cable connectors gesis® solar PST 40 (Wieland)	1.5 - 2.5	15 / 13		
97 49 69 2	072126				4 - 10	11 - 7		
97 49 70	030942			Western plugs	4 / 6 / 8-pole RJ 10; 11; 12; 45			
97 49 71	075066			solar cable connectors MC4 (Multi-Contact)	4 - 10	11 - 7		

Special profiles on request

CRIMPING PLIERS

Article No.	EAN 4003773-		Applications	Capacity mm ²	AWG	Capacity SW mm	Sleeves Ø mm
97 49 72	076957		solar cable connectors MC3 (Multi-Contact)		7 / 10 / 11		
97 49 74	044062		unshielded Molex plugs (short design)	4 / 6 / 8-pole RJ 10; 11; 12; 45			
97 49 76	047513		shielded Stewart plugs				
97 49 81	042778		fibre optic connectors, e.g. Harting			3.0 / 4.95 / 6.5	3.5 / 6.0 / 7.5
97 49 82	042785		fibre optic connectors, e.g. Telegärtner			3.25 / 3.65 / 4.52	3.6 / 4.0 / 5.4
97 49 83	044079		fibre optic connectors, e.g. FSMA-, ST-, SC- + STSC- / K-connectors			3.65 / 4.2 / 5.0	4.3 / 5.4 / 6.0
97 49 84	042792		fibre optic connectors, e.g. Huber / Suhner			3.8 / 4.3 / 4.95	4.5 / 5.2 / 6.0
97 49 87	043331		fibre optic connectors, e.g. FSMA-; ST- and MIC-connectors			8.7	9.5

97 49 94	030997	Locator for 97 49 04 / 97 52 04 / 97 52 34	
97 49 95	031000	Locator for 97 49 05 / 97 52 05 / 97 52 35	
97 49 93	047926	Locator for 97 49 24 (D-Sub-plugs)	
97 49 59 1	073741	Locator for 97 49 59 (solar cable connectors Helios H4)	
97 49 90	031017	Locator for 97 49 60 (HTS + Harting)	
97 49 65 1	066729	Locator for 97 49 65 (solar cable connectors MC3)	
97 49 66 1	066736	Locator for 97 49 66 (solar cable connectors MC4)	
97 49 68 1	066743	Locator for 97 49 68 (solar cable connectors Solarlok)	
97 49 69 11	072133	Locator for 97 49 69 1 and 97 49 69 2	
97 49 71 1	075073	Locator for 97 49 71 (solar cable connectors MC4)	




97
91

Tool Case for Photovoltaics



97 91 01

- with tools for photovoltaics
- without crimping dies – please order separately (see ref. 97 49...) for individual assortment
- with service tools (hexagonal key) for the change of crimping dies
- shock-resistant plastic case
- foam insert with recesses for tools, crimping dies and locators
- dimensions, exterior (W x H x D): 345 x 80 x 280 mm

Article-No.	EAN 4003773-			Quantity	g
97 91 01	070351		Tool Case for Photovoltaics		1964
			12 12 11 Precision Insulation Stripper, with adapted blades	1	
			95 16 165 Cable Shears	1	
			97 43 200 Crimp System Pliers, for exchangeable crimping dies	1	

97
91

Tool Case for Photovoltaics, MC3 (Multi-Contact)



97 91 02

- the complete tool set to install MC3 connectors
- with service tools (hexagonal key) for the change of crimping dies
- shock-resistant plastic case
- foam inserts with recesses for the tools, crimping dies and locators
- with four empty plastic boxes for consumables; for individual equipping
- dimensions, exterior (W x H x D): 360 x 105 x 300 mm

Article No.	EAN 4003773-				Quantity	△ g
97 91 02	074083		Tool Case for Photovoltaics, MC3 (Multi-Contact)			3280
		MM	12 12 11	Precision Insulation Stripper, with adapted blades	1	
		1000V	95 16 165	Cable Shears	1	
		MM	97 43 200	Crimp System Pliers, for exchangeable crimping dies	1	
			97 49 65	Crimping dies, for solar cable connectors MC3 (Multi-Contact)	1	
			97 49 65 1	Locator for 97 49 65 (solar cable connectors MC3)	1	
			97 49 65 2	Mounting Tool for MC3 connectors	1	

97

Mounting Tool for MC3 connectors



97 49 65 2

- for easy and quick assembly of MC3 solar cable connectors
- for fit solar sleeves for connectors from 2.5 to 10 mm²
- three capsules (2.5 / 4; 6; 10 mm²) for pulling on the sleeves, integrated in the detachable handle
- Body: plastic, fibreglass-reinforced



The assembly tool comes with three torpedo mandrels for the various cable cross-sections

Article No.	EAN 4003773-	↔ mm	Capacity mm ²	△ g
97 49 65 2	072010	325	2.5 - 10	460

97

Set of Mounting Tools for solar cable connectors MC4 (Multi-Contact)



97 49 66 2

- set of two mounting tools
- to tighten cable glands of MC4 solar plugs
- to open the locking of MC4 housings (even in case of mounted lock clip)
- Tool: plastic, fibreglass reinforced

Article No.	EAN 4003773-	↔ mm	△ g
97 49 66 2	074106	115	18

97
40

Compression Tool

for Coax connectors



97 40 20 SB



For crimping F, BNC and RCA connectors

Robust design

- suitable for RG 59 / 6 / 11 cable
- rotatable head for different cable sizes
- rotatable insert for various types of connector
- adjusting screw for various connector lengths
- applicable among others for compression connectors Kathrein EMK 12; Cablecon F-56 CX3 5.1; Astro FKS 06

Size X after compression	plugs	
17 - 24 mm		F (RG 59/6)
30 - 37 mm		BNC (RG 59/6)
22 - 29 mm		RCA (59/6)
35 - 42 mm		F (RG 11)

Article No.	EAN	↔ mm	Applications	⚖ g
97 40 20 SB	4003773-077626	175	for F, BNC and RCA-plugs	430

97
50


Crimping Pliers for Scotchlok connectors with side cutter



97 50 01
MM



- for crimping plastic-insulated telecommunication or signal cables using the U-contact principle in single Scotchlok connectors
- no stripping necessary, U-shaped elements establish the connection
- cutting edges additionally induction hardened
- with opening spring
- Vanadium electric steel; forged, oil-hardened



Article No.	EAN	↔ mm		Head	Handles	Applications	Capacity Ø mm	⚖ g
97 50 01	028239	155		MM	polished plastic coated	Scotchlok single connector	0.4 - 1.1	135

97
51

Crimping Pliers for Western plugs



97 51 10
MM



- professional tool for cutting and stripping unshielded ribbon telephone cables
- for crimping 6- and 8-pole Western plugs type RJ 11/12 (9.65 mm width) and type RJ 45 (11.68 mm width)
- exact crimping process due to parallel crimping
- repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- with length cutter and dismantling knife for ribbon cables 6 and 12 mm length
- with additional stripping device for round cables
- Chrome vanadium electric steel in special quality, oil-hardened

Article No.	EAN	↔ mm		Handles	Capacity	⚖ g
97 51 10	043171	190		with multi-component grips	RJ 11/12 (6-poles) 9.65 mm RJ 45 (8-poles) 11.68 mm	340

97 59 06 029700 4 spare blades for 97 51 10

97
51

Crimping Pliers for Western plugs



97 51 12



- professional tool for cutting and stripping unshielded ribbon telephone cables
- for crimping 4-, 6- and 8-pole Western plugs type RJ 10 (7.65 mm width), type RJ 11/12 (9.65 mm width) and type RJ 45 (11.68 mm width)
- exact crimping process due to parallel crimping
- repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- with length cutter and dismantling knife for ribbon cables 6 and 12 mm length
- with additional stripping device for round cables
- Chrome vanadium electric steel in special quality, oil-hardened



Article No.	EAN	↔ mm		Handles	Capacity	g
97 51 12	4003773-043188	200		with multi-component grips	RJ 10 (4-poles) 7.65 mm RJ 11/12 (6-poles) 9.65 mm RJ 45 (8-poles) 11.68 mm	522

97 59 12 069997 Spare blades for 97 51 12

97
52

Crimping Pliers short design



97 52 14



- repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- good handling due to 20° angled head, low weight and short design
- Chrome vanadium electric steel in special quality, oil-hardened



97 52 14

available as accessory: locator for non-insulated open plug-type connectors

Article No.	EAN	↔ mm		Pliers	Handles	Applications	Capacity mm ²	AWG	g
97 52 14	026808	195		burnished	with multi-component grips	non-insulated open plug type connectors (plug width 2.8 + 4.8 mm)	0.10 - 1.5	27 - 16	387
97 52 20	026853	195		burnished	with multi-component grips	COAX-, BNC- and TNC connectors RG 58 / 59 / 62 / 71 / 223			380

97 59 14 026976 Locator for 97 52 14

CRIMPING PLIERS

97
52

Crimping Pliers also for two-hand operation



97 52 04



97 52 06



97 52 10

- for solder-free electrical connections
- the ingenious lever transmission reduces the handforce up to 30% compared with regular crimping pliers
- repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- two-hand operation for easy crimping of large conductor diameters
- easy handling as a result of well balanced centre of gravity, angled head and ergonomically shaped handles
- Chrome vanadium electric steel in special quality, oil-hardened

97 52 09



First step: move the handle with two fingers only until both jaws touch the connector to be crimped



Second step: now use the whole hand for further crimping procedure



Third step: when greater hand force is required, such as e.g. when crimping insulated connectors 6 mm², two-hand operation is possible by the longer handles

Article No.	EAN 4003773-	↔ mm			Applications	Capacity mm ²	AWG	△ g
97 52 04	025450	250			non-insulated open plug type connectors (plug width 2,8 + 4,8 mm)	2.8 mm: 0.1 - 0.25 2.8 mm: 0.5 - 1 4.8 mm: 0.5 - 1 4.8 mm: 1.5 - 2.5	27 - 13	562
97 52 05	025467	250			non-insulated open plug type connectors (plug width 2,8 + 4,8 mm)	0.5 - 1 1.5 - 2.5 4 - 6	20 - 10	572
97 52 06	025474	250			insulated terminals, plug connectors and butt connectors	0.5 - 1 1.5 - 2.5 4 - 6	20 - 10	565
97 52 08	025481	250			insulated and non-insulated end sleeves (ferrules)	0.25 - 0.75 1 - 1.5 2.5 4 6	23 - 10	565
97 52 09	025498	250			insulated and non-insulated end sleeves (ferrules)	10 / 16 / 25	7 / 5 / 3	571
97 52 10	023678	250			Coax-, BNC- and TNC-connectors			577
97 52 13	048084	250			non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267	0.5 - 1 1.5 - 2.5 4 - 6 10	20 - 7	558
97 52 19	052142	250			insulated and non-insulated end sleeves (ferrules)	35 / 50	2 / 0	567
97 52 23	052159	250			non-insulated terminals + plug connectors	16 / 25	5 / 3	565
97 49 94	030997	Locator for 97 49 04 / 97 52 04 / 97 52 34						
97 49 95	031000	Locator for 97 49 05 / 97 52 05 / 97 52 35						

CRIMPING PLIERS

97
52

KNIPEX PreciForce® Crimping Pliers



97 52 30



97 52 33



97 52 34



97 52 36



97 52 38




For daily crimping applications, the specialist likes crimping pliers that work precisely and reliably. In addition, they should be light, comfortable to use, robust and reasonably priced: PreciForce®.

- repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- good handling thanks to favourable handle position, low weight, compact design and ergonomically shaped handles
- Chrome vanadium electric steel in special quality, oil-hardened

97 52 36



97 52 38

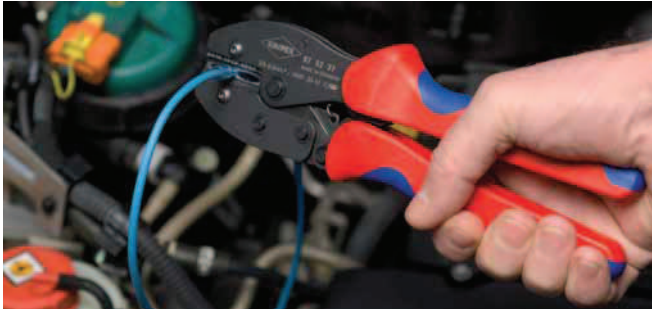


97 52 37

Article No.	EAN 4003773-	↔ mm		Applications	Capacity mm ²	AWG	△ g	
97 52 30	051855	220		compression joints according to DIN 46267	1.5 - 4 (6 - 10)	15 - 11 10 / 7	477	
97 52 33	051862	220		non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267	0.5 - 1 1.5 - 2.5 4 - 6 10	20 - 7	478	
97 52 34	051879	220		non-insulated open plug type connectors (plug width 2,8 + 4,8 mm)	2.8 mm: 0.1 - 0.25 2.8 mm: 0.5 - 1 4.8 mm: 0.5 - 1 4.8 mm: 1.5 - 2.5	27 - 13	483	
97 52 35	051886	220		non-insulated open plug type connectors (plug width 4,8 + 6,3 mm)	0.5 - 1 1.5 - 2.5 4 - 6	20 - 10	494	
97 52 36	051893	220		insulated terminals + plug connectors	0.5 - 1 1.5 - 2.5 4 - 6	20 - 10	487	
97 52 37	063193	220		heat shrinkable sleeve connectors	0.5 - 1 1.5 - 2.5 4 - 6	20 - 10	478	
97 52 38	051909	220		insulated and non-insulated end sleeves (ferrules)	0.25 - 0.75 1 - 1.5 2.5 4 6	23 - 10	493	
97 52 50	051916	220		COAX-, BNC- and TNC-connectors for RG 58; 174; 188; 316			498	
97 49 94	030997	Locator for 97 49 04 / 97 52 04 / 97 52 34						
97 49 95	031000	Locator for 97 49 05 / 97 52 05 / 97 52 35						

97
52

Four-Mandrel Crimping Pliers for turned contacts

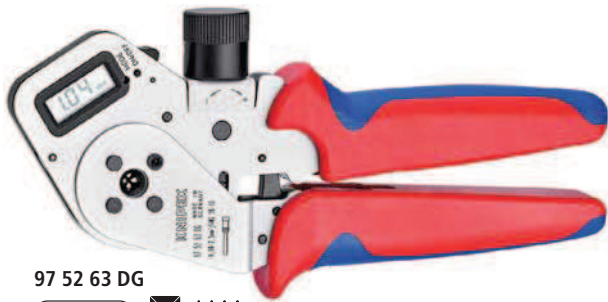

97 52 63 DG

PATENTED



97 52 64



97 52 65

PATENTED



97 52 65 DG

PATENTED



97 59 65 2

Turned contacts are used for particularly demanding plug-type connections, e.g. in medical industry and aeronautics. Extremely reliable crimping connections can be achieved only with pliers that work with absolute precision and maintain the required crimping depth in the 1/100 mm range.

- for crimping turned contacts
- four-mandrel crimping for top-quality crimping connections
- mandrel gauge to check the basic setting
- repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- optimum transmission of force due to highly effective lever action for fatigue-reduced operation
- high operation comfort thanks to handy shape
- Chrome vanadium electric steel in special quality, oil-hardened

97 52 63

fine adjustment of pressure depending on the conductor's diameter by means of adjusting wheel; pliers in a plastic case with foam insert and standard locator for precise positioning of the contacts

97 52 63 DG

crimping capacity can be adjusted in increments of 0.01 mm; with digital display of the preset crimping capacities and possibility of re-calibration via RESET function with electronic wear monitoring; adjustment in mm, inches or comparable selection positions according to MIL; pliers in a plastic case with foam insert and standard locator for precise positioning of the contacts

97 52 64

pressure adjustment depending on the conductor's diameter by means of adjusting wheel in 4 different positions; locator for positioning the contacts

97 52 65

fine adjustment of pressure depending on the conductor's diameter by means of adjusting wheel; locator for positioning the contacts; with table for calculating the settings; pliers in a plastic case with foam insert

97 52 65 A

fine adjustment of pressure depending on the conductor's diameter by means of adjusting wheel; with table for calculating the settings; pliers in a plastic case with foam insert

97 52 65 DG

crimping capacity can be adjusted in increments of 0.01 mm; with digital display of the preset crimping capacities and possibility of re-calibration via RESET function with electronic wear monitoring; adjustment in mm, inches or comparable selection positions according to MIL; with table for calculating the settings; pliers in a plastic case with foam insert and standard locator for precise positioning of the contacts

97 52 65 DG A

crimping capacity can be adjusted in increments of 0.01 mm; with digital display of the preset crimping capacities and possibility of re-calibration via RESET function with electronic wear monitoring; adjustment in mm, inches or comparable selection positions according to MIL; with table for calculating the settings; pliers in a plastic case with foam insert; without locator

97 59 65 2

locator for holding turned contacts for crimping; precisely adjustable to the length (20 - 45 mm) and diameter (1 - 8 mm) of the crimping connector; locator that is universally adjustable (in length and diameter) for the repeatable exact alignment of turned contacts in crimping pliers; can be set to all commercially available turned contacts in the four-mandrel crimping pliers' capacity range

CRIMPING PLIERS



Standard locator



Multifunctional digital indication, adjustment in mm, inches or comparable selection positions according to MIL

Article No.	EAN 4003773-	↔ mm		Pliers	Handles	Applications	Capacity mm ²	AWG	△ g
97 52 63	050148	180		chrome plated	with multi-component grips	turned contacts	0.08 - 2.5	28 - 13	388
97 52 63 DG	063209	195		chrome plated	with multi-component grips	turned contacts	0.08 - 2.5	28 - 13	388
97 52 64	044093	180		chrome plated	with multi-component grips	turned contacts	0.08 - 2.5	28 - 13	424
97 52 65	045236	230		chrome plated	with multi-component grips	turned contacts (Harting; Ilme; Phoenix; Amphenol; Walther; HTS; Contact; Weidmüller)	0.14 - 6	25 - 10	676
97 52 65 A	071594	250		chrome plated	with multi-component grips	turned contacts (Harting; Ilme; Phoenix; Amphenol; Walther; HTS; Contact; Weidmüller)	0.14 - 6	25 - 10	604
97 52 65 DG	063216	250		chrome plated	with multi-component grips	turned contacts (Harting; Ilme; Phoenix; Amphenol; Walther; HTS; Contact; Weidmüller)	0.14 - 6	25 - 10	633
97 52 65 DG A	071990	250		chrome plated	with multi-component grips	turned contacts (Harting; Ilme; Phoenix; Amphenol; Walther; HTS; Contact; Weidmüller)	0.14 - 6	25 - 10	633

97 59 65 2 071600 Universal Locator for 97 52 65 / 97 52 65 A / 97 52 65 DG / 97 52 65 DG A

97
53

Self-Adjusting Crimping Pliers for end sleeves (ferrules) with lateral access

PAT. PEND.

Compact crimping pliers forend sleeves (ferrules) with two great advantages for the user:

- Automatic self-adjustment to the end sleeve (ferrule) used: this allows the specialist to work with less strain and enables secure, reliable and quick crimping.
- Extensive range of applications

Square compression now additionally also for end sleeves (ferrules) up to 16 mm²

Narrow handle width and improved ergonomics



Crimping capacity can be switched over from 10 mm² to 16 mm²



97 53 04 0,08 - 10 mm² + 16 mm²



square compression for optimum contact areas in the clamp connection

97 53 04



Proven functions

- for crimping end sleeves (ferrules) according to DIN 46228 parts 1 + 4
- self-adjusting adaptation to the desired end sleeve (ferrule) size: no wrong crimps caused by using the wrong die
- fits all twin- ferrules within the application range
- repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- tools have been set precisely (calibrated) in the factory
- optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- handy shape and low weight provide high operation comfort

Expanded capacity of hexagonal crimping up to 10 mm²

Narrow handle width and improved ergonomics



97 53 14 0,08 - 10 mm²



hexagonal compression for optimum positioning in confined areas

97 53 14



Article No.	EAN 4003773-	↔ mm		Pliers	Handles	Applications	Capacity mm ²	AWG	△ g
97 53 04	028017	180		burnished	with multi-component grips	End Sleeves (ferrules)	0.08 - 10 / 16	28 - 7 / 5	405
97 53 14	041474	180		burnished	with multi-component grips	End Sleeves (ferrules)	0.08 - 10	28 - 7	404

97
53

Self-Adjusting Crimping Pliers for end sleeves (ferrules) with front loading



PATENTED



97 53 08



The crimping pliers for end sleeves (ferrules) with three great advantages for the user:

- Automatic self-adjustment to the end sleeve (ferrule) used: this allows the specialist to work with less strain and enables secure, reliable and quick crimping.
- Range of applications also for large cross-sections: square crimping 0.08 to 10 + 16 mm²
- Front loading: very helpful under difficult working conditions in confined areas.

- for crimping end sleeves (ferrules) according to DIN 46228 parts 1 + 4
- self-adjusting adaptation to the desired end sleeve (ferrule) size: no wrong crimps caused by using the wrong die
- fits all twin-ferrules within the application range
- front loading of the end sleeves (ferrules) into the tool
- repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- high operation comfort thanks to handy shape and low weight
- Chrome vanadium electric steel in special quality, oil-hardened



97 53 09



97 53 09



97 53 08
compression from 0.08 - 10 mm² in one profile; end sleeves (ferrules) up to 2.5 mm² can also be loaded parallelly from the side


97 53 09
compression from 0.08 - 10 mm² and 16 mm² in one profile; with selector lever for setting the crimping area either to 0.08 - 10 mm² or 16 mm²




Square crimping



Front loading of end sleeves (ferrules) e.g. in switchboards



97 53 08: lateral loading of end sleeves (ferrules) up to 2.5 mm² parallelly from the side e.g. in confined areas

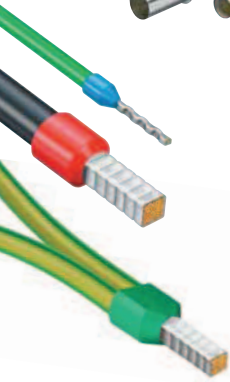

Article No.	EAN 4003773-	↔ mm			Pliers	Handles	Applications	Capacity mm ²	AWG	g
97 53 08	040187	190			burnished	with multi-component grips	End Sleeves (ferrules)	0.08 - 10	28 - 7	477
97 53 09	044550	190			burnished	with multi-component grips	End Sleeves (ferrules)	0.08 - 10 / 16	28 - 7 / 5	486

CRIMPING PLIERS

97
54

Crimping Pliers for micro plugs

parallel crimping



97 54 24



- parallel crimping performance to satisfy the particularly high standards of small connectors
- repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- fixed locator for D-Sub micro plugs for an exact positioning of connector and cable
- crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- crimping pliers for other mini plugs as e. g. HD 22, Modu IV, Micro Timer, MQS, .. on request
- Chrome vanadium electric steel in special quality, oil-hardened



Article No.	EAN 4003773-	↔ mm			Pliers	Handles	Applications	Capacity mm ²	AWG	⚖ g
97 54 24	060215	190			burnished	with multi-component grips	D Sub; HD 20; HDE plug	0.03 - 0.56	32 - 20	305

97
6

Crimping Pliers for end sleeves (ferrules)



97 62 145 A



97 68 145 A



⚡ 1000V



- for crimping end sleeves (ferrules) according DIN 46228 parts 1 + 4 in the range from 0.25 up to 2.5 mm²
- crimping in marked trapezoidal dies for reliable connections between the sleeve and the conductor
- Vanadium electric steel; forged, oil-hardened



Article No.	EAN 4003773-	↔ mm			Head	Handles	Capacity mm ²	AWG	⚖ g
97 61 145 A	035558	145			polished	plastic coated	0.25 - 2.5	23 - 13	140
97 61 145 F	043980	145			polished	plastic coated	0.25 - 2.5	23 - 13	140
97 62 145 A	060154	145			polished	with multi-component grips	0.25 - 2.5	23 - 13	170
97 68 145 A	071754	145			polished	insulated with multi-component grips, VDE-tested	0.25 - 2.5	23 - 13	175

CRIMPING PLIERS

97
7

Crimping Pliers for end sleeves (ferrules)

Now also as VDE version

30 % easier crimping due to improved leverage
Light and slim design

- for crimping end sleeves (ferrules) according DIN 46228 parts 1 + 4 from 0.25 to 16 mm²
- crimping in marked half-round dies for reliable connections between the sleeve and the conductor
- 9 particularly deep dies with conical side faces
- High-grade special tool steel, forged, oil-hardened




97 71 180



97 72 180



97 78 180



Article No.	EAN 4003773-	↔ mm			Head	Handles	Applications	Capacity mm ²	AWG	⚖ g
97 71 180	040668	180			polished	plastic coated	End Sleeves (ferrules)	0.25 - 16	23 - 5	205
97 72 180	060185	180			polished	with multi-component grips	End Sleeves (ferrules)	0.25 - 16	23 - 5	242
97 78 180	072003	180			polished	insulated with multi-component grips, VDE-tested	End Sleeves (ferrules)	0.25 - 16	23 - 5	254

97
8

Crimping Pliers for end sleeves (ferrules) with front loading

- for crimping end sleeves (ferrules) according DIN 46228 parts 1 + 4 in the range 0.5 to 6 mm²
- ideal for work in confined areas, e.g. in narrow and deep switch boxes
- Special tool steel, forged, oil-hardened



97 81 180



Article No.	EAN 4003773-	↔ mm			Head	Handles	Applications	Capacity mm ²	AWG	⚖ g
97 81 180	019794	180			polished	plastic coated	End Sleeves (ferrules)	0.5 - 6	20 - 10	227