



micronel us LLC

2075 Corte del Nogal, Section S, Carlsbad, CA 92011, Tel: 760-929-2260, Fax: 760-929-2262
 E-mail: sales@micronel-us.com, URL: www.micronel-us.com

Ultra Slim Fan Model:

F25



Ø25 x 10 mm (Ø0.98 x 0.39 in)

Long life / low noise

- * Frame: ABS-PBT, Black
- * Impeller: ABS-PBT, Black
- * Lead Wire: 140mm
- * Dielectric Strength: max 1mA @ 600VAC
- * Insulation: > 10MΩ, tested @ 500VDC
- * Weight: 7g (0.25oz)
- * Operational Temperature: -10 to 60 °C / 14 to 140 °F
- * MTTF: 30,000 hr



F25 LM/MM	mm	inch
B	2.8	0.11
D	23.5	0.92
L1	10	0.39
L2	8	0.31
L3	5.4	0.21
Q1	25	0.98
Q2	20	0.79
x	2x45°	0.08x45°



PART NUMBER	BEARING SYSTEM	VOLTAGE [VDC]	RANGE [VDC]	CURRENT [mAmp]	POWER [Watts]	SPEED [RPM]	AIR FLOW (Q) [l/min]	CFM	PRESSURE (P) [mm Aq]	[In H ₂ O]	NOISE [dBA]
F25LM-005XK-9	SLEEVE/BALL	5	4.2 ~ 5.7	50	0.3	8,000	52	1.84	3.06	0.12	15
F25LM-012XK-9	SLEEVE/BALL	12	10.2 ~ 13.8	50	0.5	8,000	52	1.84	3.06	0.12	20
F25MM-005XK-9	SLEEVE/BALL	5	4.2 ~ 5.7	70	0.35	10,000	64	2.26	4.69	0.18	25
F25MM-012XK-9	SLEEVE/BALL	12	10.2 ~ 13.8	60	0.72	10,000	64	2.26	4.69	0.18	20

FEATURES



- Locked rotor protection

F25 LM/MM

5 V DC

F25 LM/MM

12 V DC

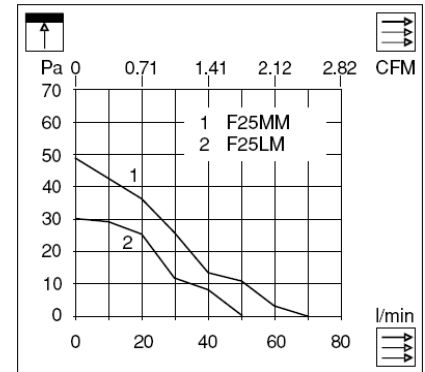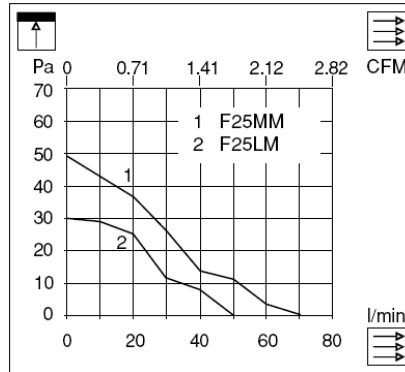

MODEL	Price 1-4 pcs.	Price 5-24 pcs.	Delivery ARO	Date:
				Quote Valid for 30 Days