

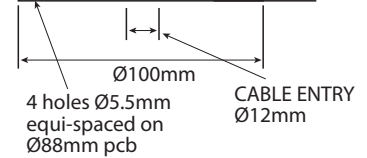



Tower Light using 120dB type buzzer

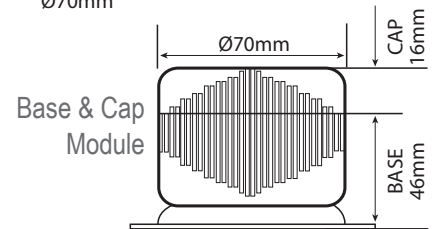


Visual Signals - Industrial LED ECO BEACONS

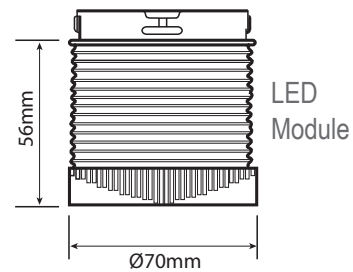

Control Termination



Base Termination



Termination to the 'B' Contact Controls a Blue LED and/or an Audible Module

Industrial LED ECO Beacons > LED-TLM Series

Product overview

The LED Tower Light Module series is ideally suited for status indication in light commercial & industrial signalling applications where a local signal is required. These beacons have two selectable stages of alarm, flashing or continuous (static) mode, selectable by a slide switch on the PCB.

The LED TLM ECO range has been designed predominantly to offer a cost effective solution against more traditional incandescent types of lamps, whether through new plant

and machinery installations or existing facility upgrades.

The design is modular and is easily assembled. Colour modules are supplied with quick fix termination that simply push into male terminal in the module below to make a connection. Customer connections are into the base unit only.

Audible modules are also available. The two ECO sounders units (Dc or Ac) offer up to 100dB and are either continuous or pulsed tone and rated at IP54. An additional high output sounder unit offers up to a 120dB and is either continuous or pulsed tone and is rated at IP65. Data sheets available.

LED-TLM Series > Ordering Information

Code No:	Voltage:	Light Source:	Current:
LED-TLM-02	24v Dc ---	18 SMT LEDs	45mA
LED-TLM-04	85-275v Ac ~	18 SMT LEDs	75mA
LED-TLM-AUD-02	24v Dc ---	n/a	55mA
LED-TLM-AUD-04	85-275v Ac ~	n/a	20mA
LED-TLM-FCP100	100mm Pole with Mounting Foot & Base Pole		
LED-TLM-BC	Mounting Base and Cap		
LED-TLM-FCP100	Mounting Base incorporating 100mm Pole with Foot and Cap		

ADD THE FOLLOWING LENS CODES TO THE PRODUCT WHEN ORDERING **01** **02** **03** **04** **05**

Features

- Continuously rated
- LED long life
- Low current consumption
- Suitable for surface mounting
- 360° light output around the vertical axis
- Dustproof and Weatherproof

Material

UV Stable Polycarbonate Lens
UV Stable ABS Plastic Base

Kg 0.70 (Light Module)

50/60 Hz

°C -25+55

IP 65

FPM 60

dB 80-120

APPROVALS and CONFORMITIES

