

## Remote LED Indicator with Buzzer REM/C/B

|                         |                               |
|-------------------------|-------------------------------|
| Cable Size              | 0.5 - 2.5mm <sup>2</sup>      |
| Recommended cable types | FIRETUF, FP200 or MICC        |
| Mounting Hole Centres   | 60.3mm                        |
| Temperature Range       | -10°C to +60°C                |
| Material                | Body (PC/ABS)<br>Lense (PMMA) |




Llantarnam Park  
Cwmbran  
Gwent  
Wales  
U.K.  
NP44 3AW

| Connection | 1 & 3   | 1 & 3   | 2 & 3    |
|------------|---------|---------|----------|
| Link JP1   | Out     | In      | n/a      |
| Supply     | 5-35Vdc | 3-16Vdc | 25mA max |
| Resistance | 3k6     | 1k5     | 0        |
| Buzzer     | Yes     | Yes     | No       |



### WIRING DETAILS

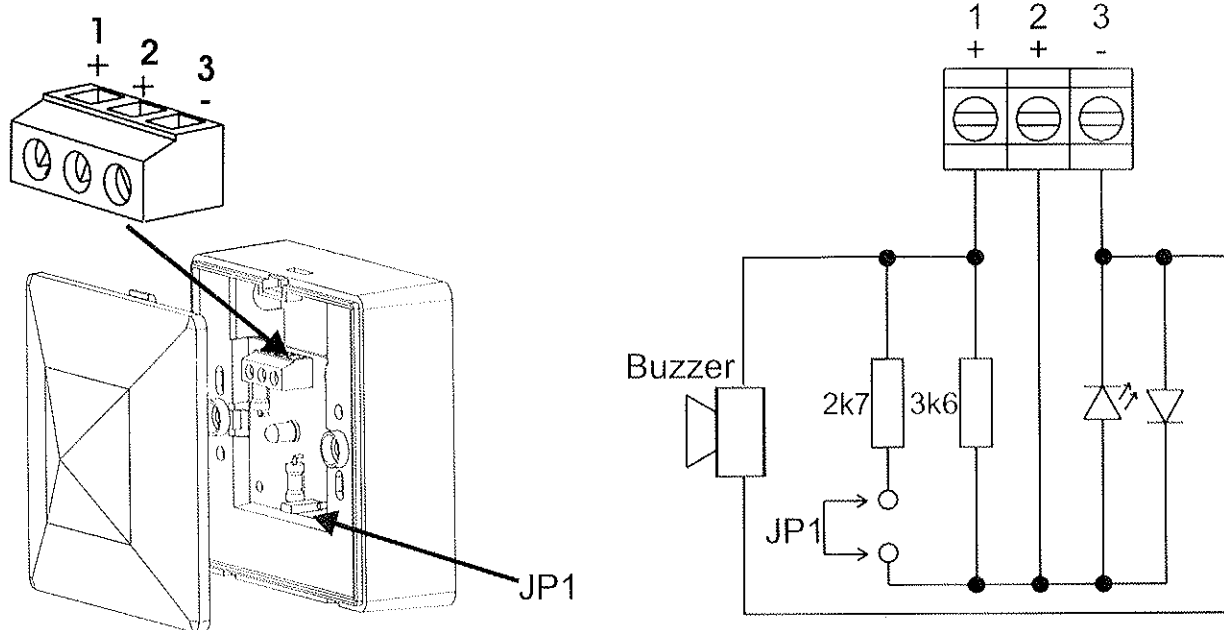

### DIMENSIONS

