


# 1 Port PCI Express Low Profile Parallel Adapter Card - SPP/EPP/ECP

Product ID: PEX1PLP

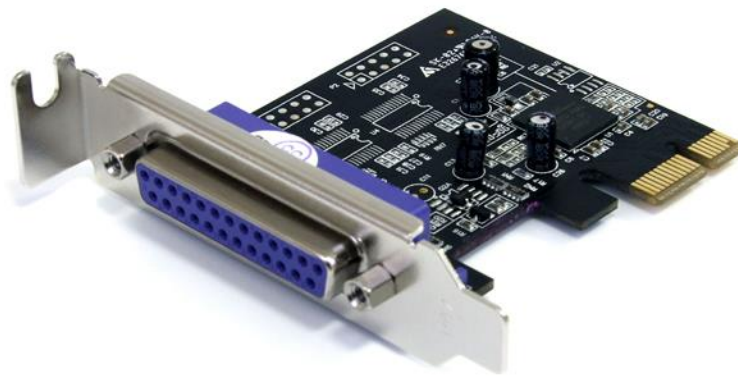

The PEX1PLP PCIe Parallel Adapter card can be installed in a PCI Express (PCIe) x1 slot, allowing you to connect EPP/ECP parallel peripherals to any computer, while relying on a native, single-chip design (Oxford OXPCIe952) that harnesses the capability of true PCI Express - ensuring maximum performance and reliability.

This high performance SPP/EPP/ECP parallel card adds 1 DB25 parallel port, perfect for connecting printers, scanners, CD-R/RW drives, memory card readers, bar code scanners and more. With the added convenience of plug-and-play capability, installing the parallel adapter card is hassle-free! The PCIe Parallel card also includes both standard and half-height/low profile mounting brackets for compatibility with almost any system form factor.

Backed by a StarTech.com 2-year warranty and free lifetime technical support.

### Certifications, Reports and Compatibility



### Applications

- Connects any parallel-based peripheral to your PC, including printers, scanners, CD-R/RWs, Zip® drives, and memory card readers

### Features

- SPP/EPP/ECP Parallel port fully supports existing Centronics interface
- Packaged with low profile/half-height bracket attached, includes full profile bracket
- Compliant with PCI Express Base Specification 1.1a
- Compliant with PCI Power Management 1.2

<b>Hardware</b>	Warranty	2 Years
	Bus Type	PCI Express
	Card Type	Low Profile (SP bracket incl.)
	Chipset ID	PLX/Oxford - OXPcIe952
	Interface	Parallel
	Port Style	Integrated on Card
	Ports	1
<b>Performance</b>	Maximum Data Transfer Rate	Up to 2.5Mbps
<b>Connector(s)</b>	Connector Type(s)	1 - PCI Express x1 Male
	External Ports	1 - DB-25 (25 pin, D-Sub) Female
<b>Software</b>	OS Compatibility	Windows® CE 6.0 / 5.0, 95, 98SE, 2000, XP, XP Embedded, Vista, 7, 8, 8.1, 10 Windows Server® 2003, 2008 R2, 2012, 2012 R2, 2016 Linux 2.4.x to 4.11.x <i>LTS Versions only</i>
<b>Environmental</b>	Humidity	5~85% RH
	Operating Temperature	0°C 50°C (32°F to 122°F)
	Storage Temperature	-20°C 60°C (-4°F to 140°F)
<b>Physical Characteristics</b>	Product Height	120 mm [4.7 in]
	Product Length	21 mm [0.8 in]
	Product Weight	65 g [2.3 oz]
	Product Width	110 mm [4.3 in]
<b>Packaging Information</b>	Shipping (Package) Weight	120 g [4.2 oz]
<b>What's in the Box</b>	Included in Package	1 - Low profile PCI Express Parallel Card 1 - Full Profile Bracket 1 - Driver CD 1 - Instruction Manual

Product appearance and specifications are subject to change without notice.