





DHA series

2.2mm Half Pitch Type

General



- Low profile 2.2mm high
- Top tape seal for washing process
- Surface mount
- Gold contacts for high reliability



General Specifications

- Contact Rating 25mA 24VDC
- Contact Resistance 100mΩ max.
- Insulation Resistance 100MΩ min, 500VDC
- Dielectric Strength 300VAC/1 Minute
- Operating Force 500gf max
- Travel 0.8mm
- Operating Life 1000 Cycles
- Operating Temperature -40°C to +85°C
- Storage Temperature -40°C to +85°C

Materials



- Cover/Base: Black thermoplastic Nylon
- Actuator: White thermoplastic LCP
- Contact: Gold plated copper alloy
- Terminals: Nickel plated brass
- Tape seal: Katpon film
- UL94-V0

Packaging


- IC Tube & T/R (see chart on next page)

Overview

DHA

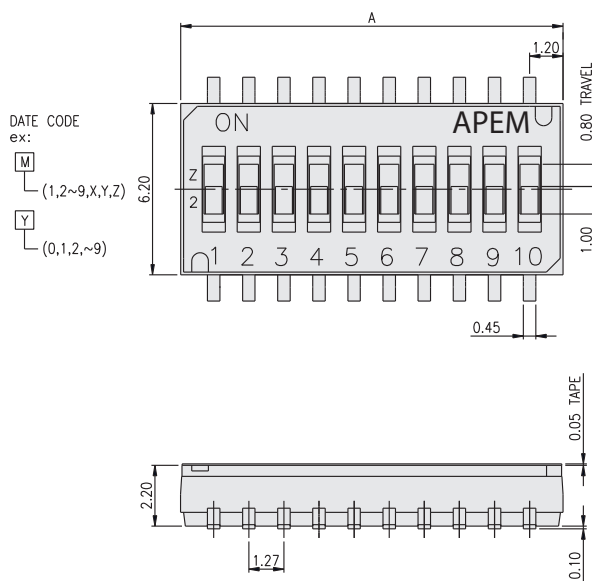

PART NO.	NO.OF POS	DIM A
DHA-02	2	3.67
DHA-04	4	6.21
DHA-06	6	8.75
DHA-08	8	11.29
DHA-10	10	13.83
DHA-12	12	16.37

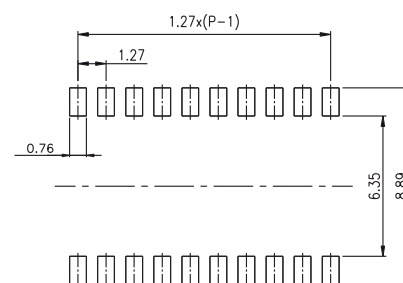


P.C.B. LAYOUT

Note: The company reserves the right to change specifications without notice.

DHA series

2.2mm Half Pitch Type

Overview Cont

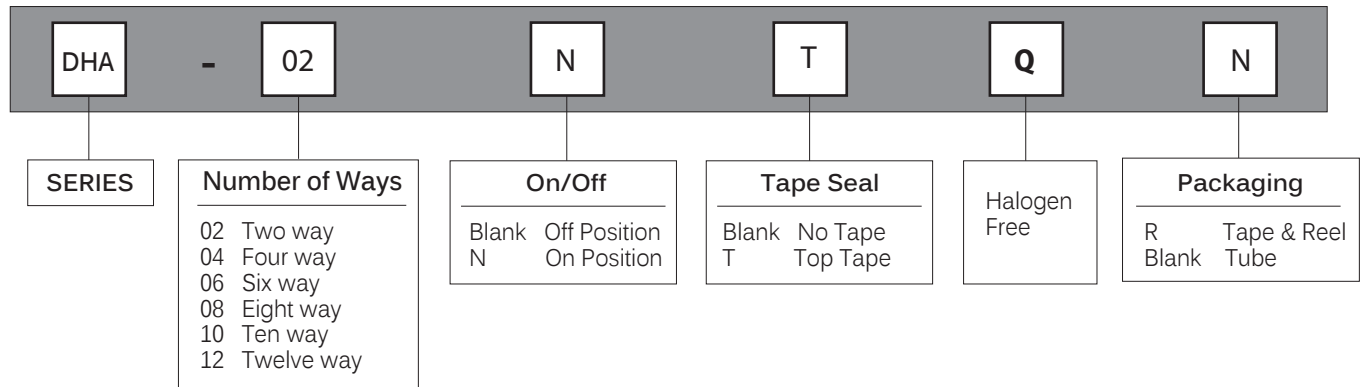

Packaging



Tape & Reel
1800pcs

Tube
DHA-02: 125pcs
DHA-04: 75pcs
DHA-06: 54pcs
DHA-08: 40pcs
DHA-10: 33pcs
DHA-12: 27pcs